




HOLDING BRACKETS FOR SUSPENDED ELEMENTS

MFX series - sides thickness from 19 mm up to 22 mm



MFX.DX96.ZIN


MFX.SX96.ZIN

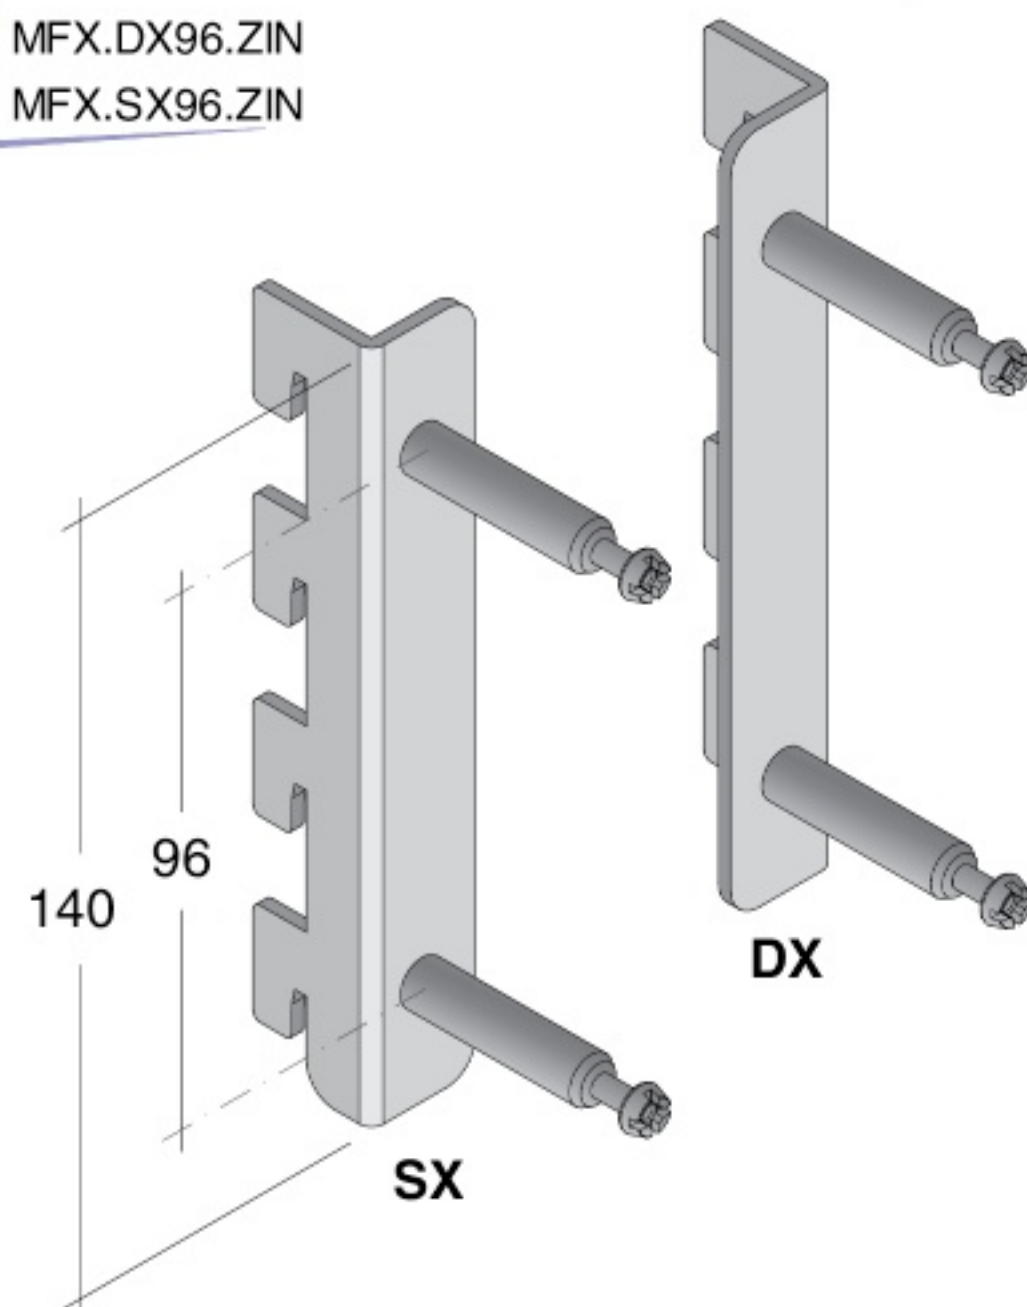


1



2

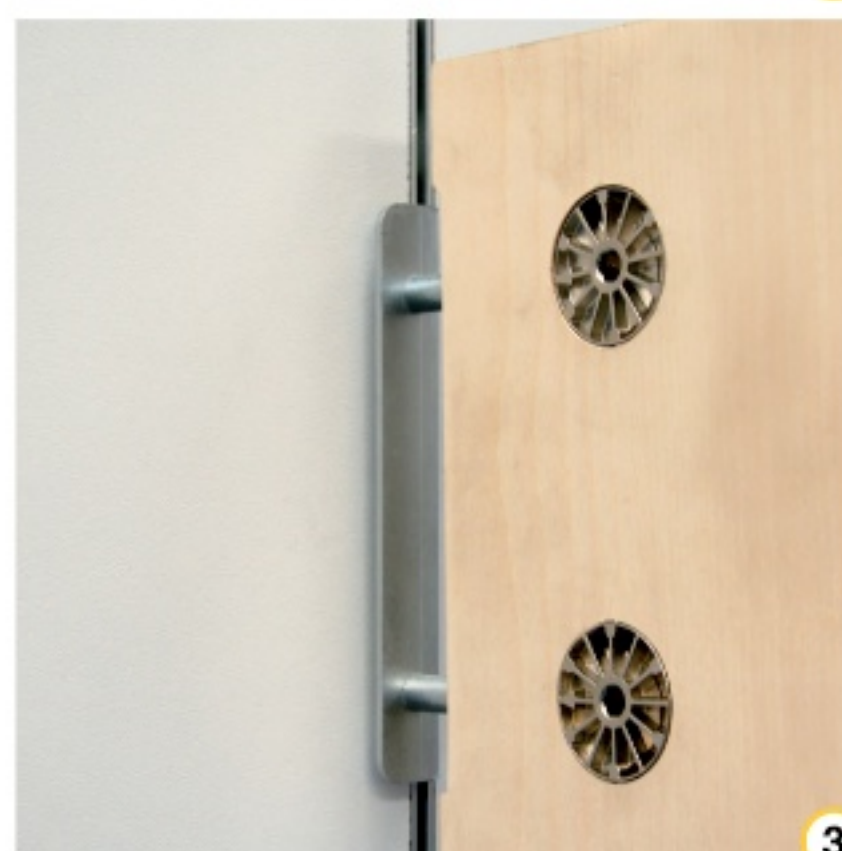

3

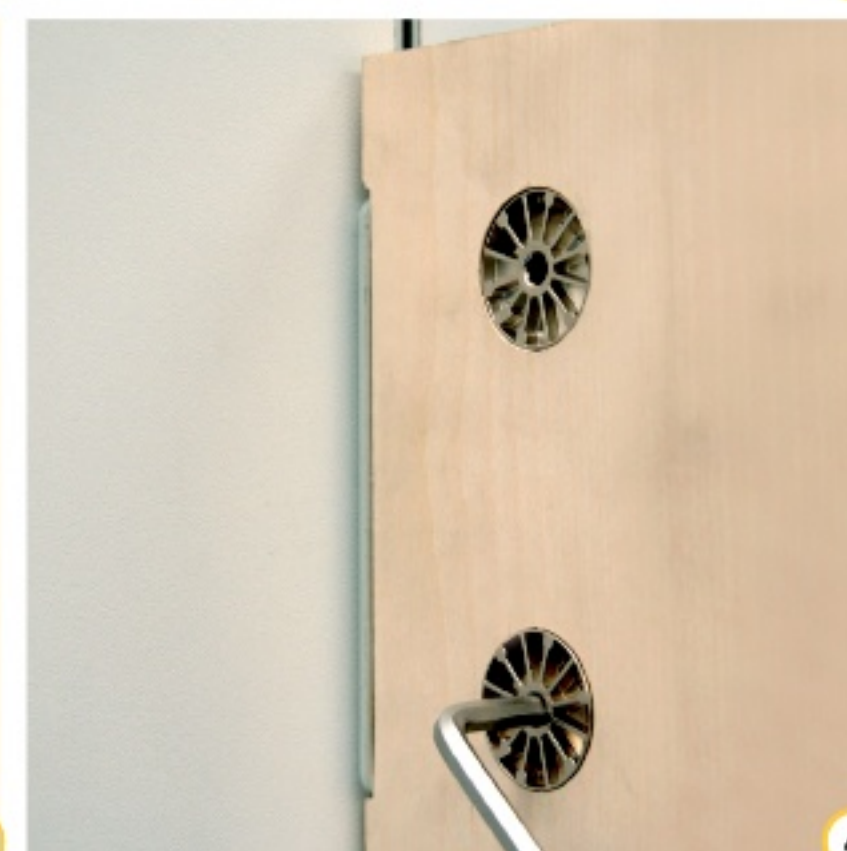


4

Cam connector - with Hex socket 6 mm



MFX.35SW.NKL

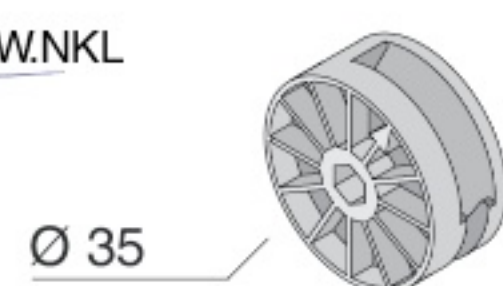

Cover cap for cam connector

white

black

beige



MFX.CAP4.BNC

MFX.CAP4.NER

MFX.CAP4.BGE


paint nickel colour

brown




MFX.CAP4.NKL

MFX.CAP4.MRN

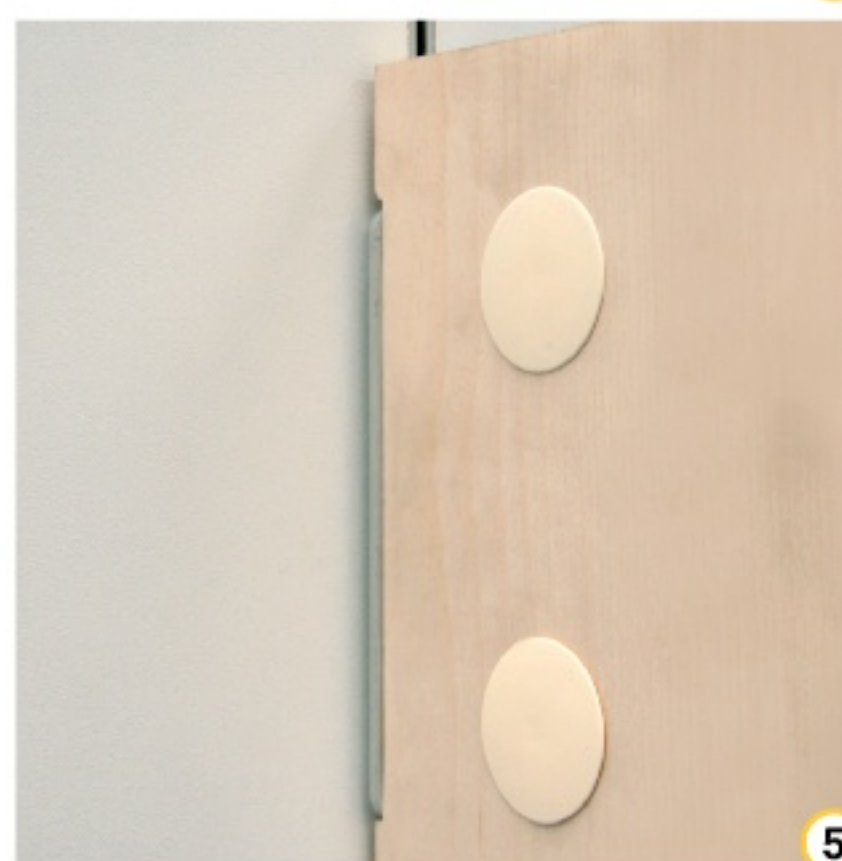


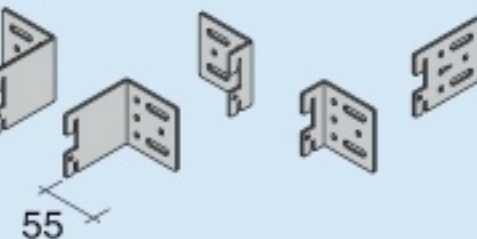
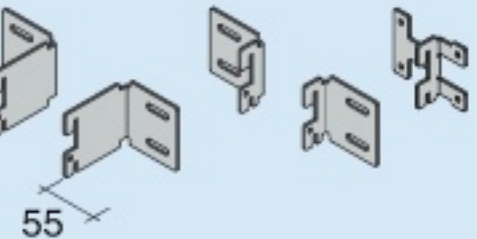
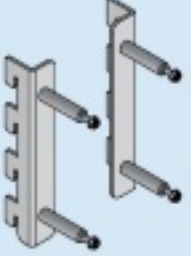

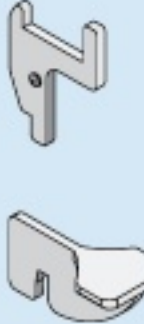
5

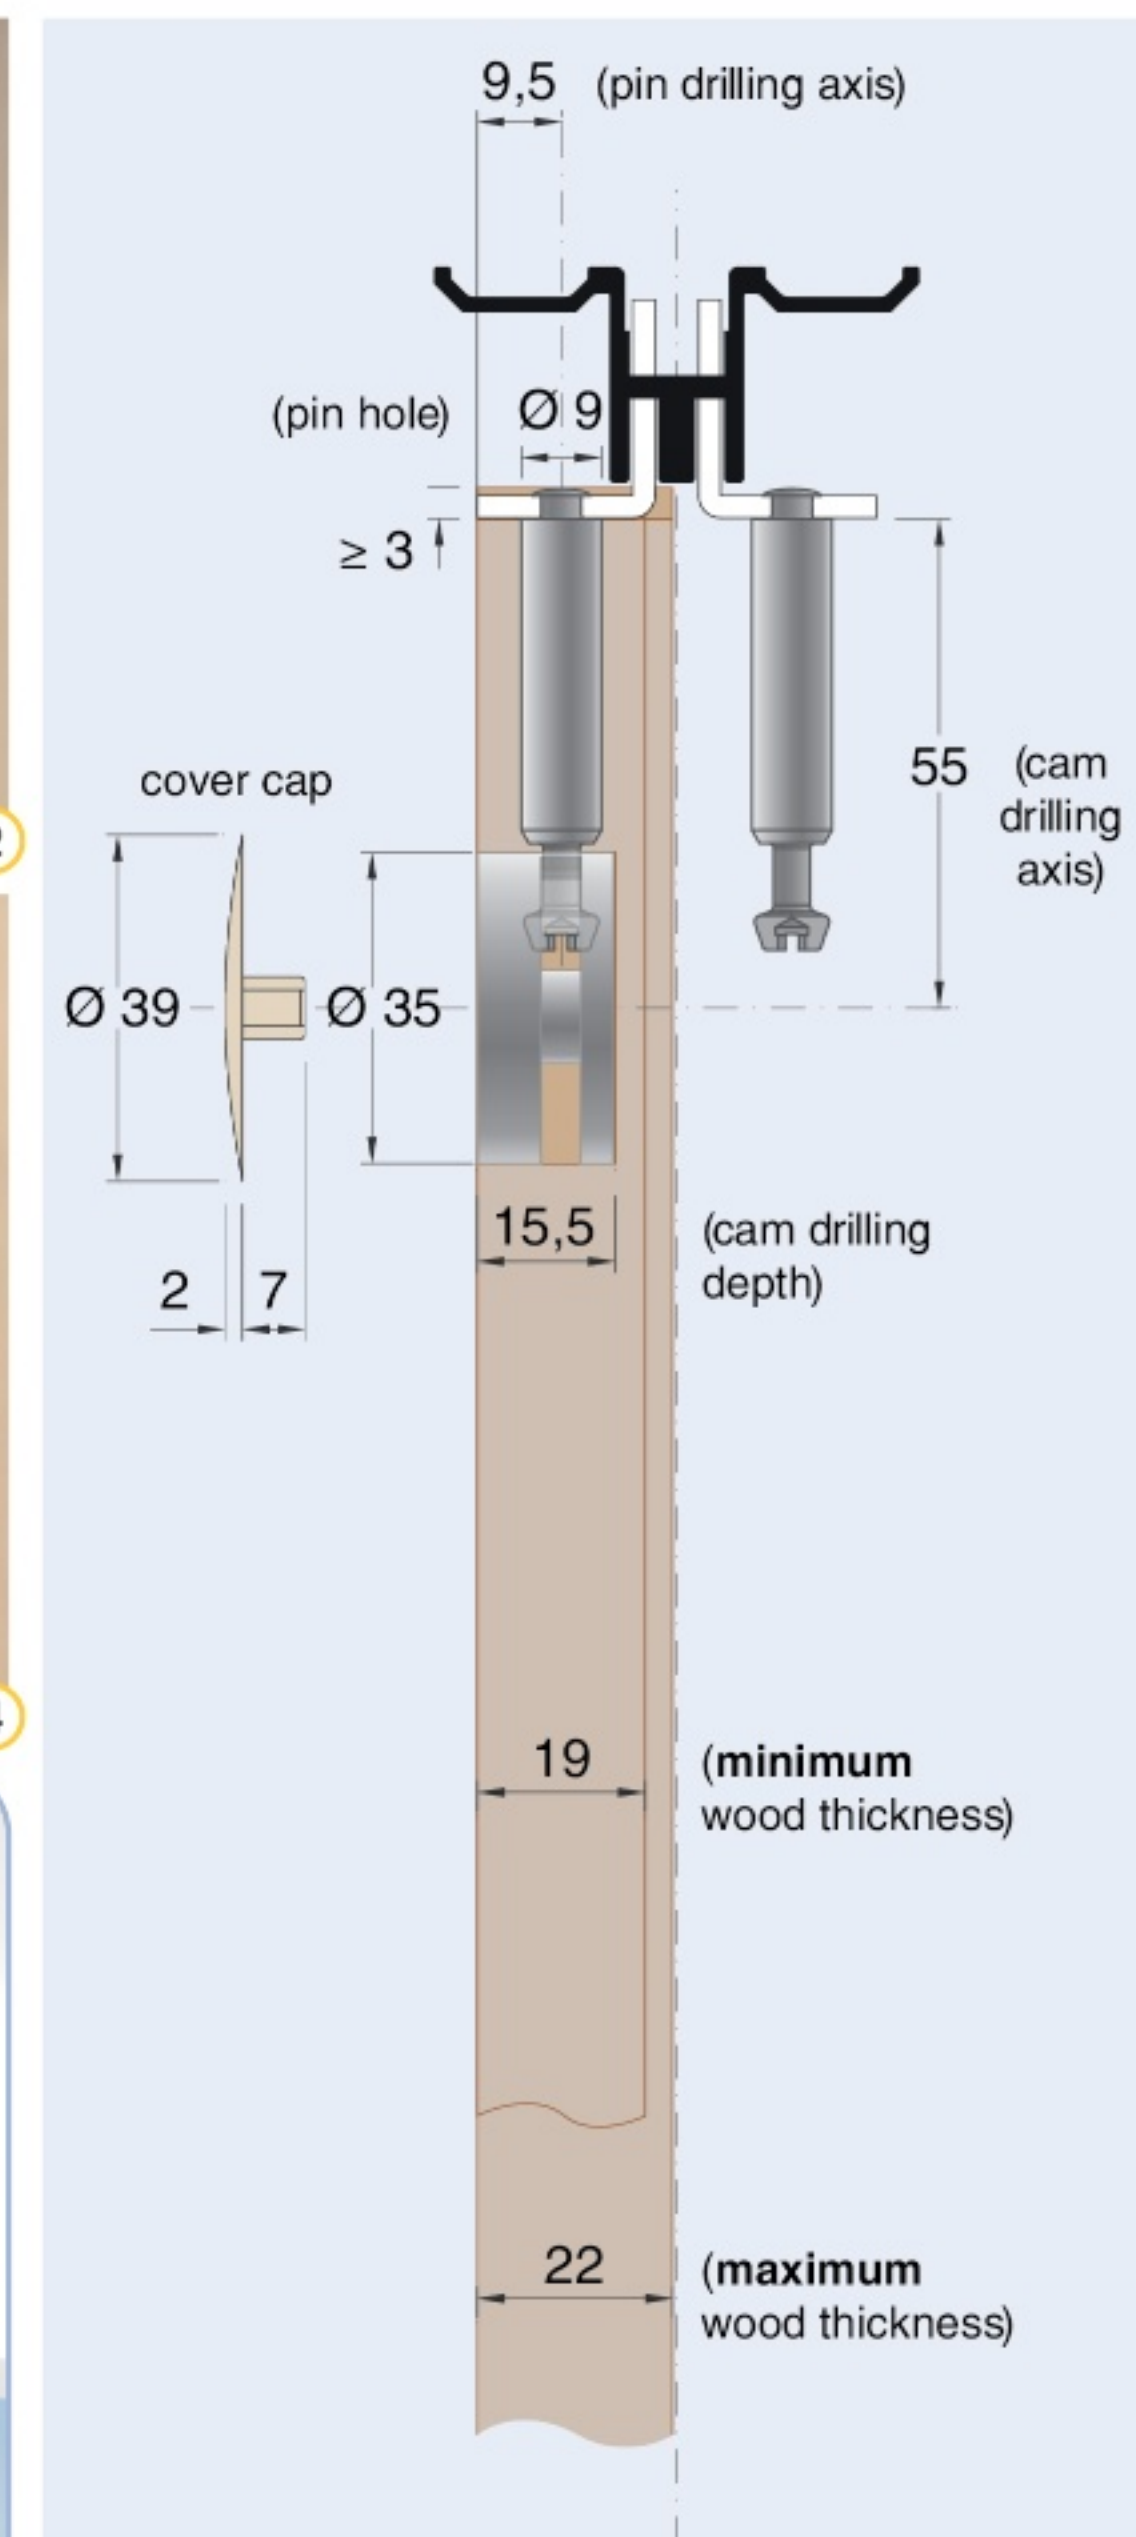

LOADING CAPACITIES on PAGE 69



LOADING capacities


	Specific accessories	Model	Length [mm]	Height [mm]	Load Aluminium	Load Steel
SKA Shoe rack page 56	 T12 (Ø12)	SKA.DX03 SKA.SX03 SKA.CN03	236	83	5 kg	
PAK page 58		PAK.DX PAK.SX	10 / 50	55		100 kg
PAT page 58		PAT.DX PAT.SX	10 / 50	55		100 kg
MFX page 59		MFX.DX96 MFX.SX96	11	140		100 kg
GNC page 63		GNC.D302	45	56	10 kg each	20 kg each
TAC page 63		TAC.L700 TAC.T700	20 24	37 15	10 kg 10 kg	20 kg each

Loading capacity evaluation for single element, on 4 resting points.

LOADING CAPACITY EVALUATION METHOD

The capacities indicated here refer to a couple of supports with saddles that undergo the following loading test:

- Assembly of 2 slotted profiles, perfectly parallel, suitably fixed at 60 cm distance from each other and fixed to the wall according to the instruction;
- fixing of 2 Fit Art supports to the slotted profiles at the equal height;
- assembly of 4 saddles, two for each support;
- positioning of a 70 cm length shelf on supports, equipped with saddles, with 5 cm overhang on each side (for saddles see pag. 35);
- positioning of the load centered on the shelf (the load is evenly distributed to simulate real application).

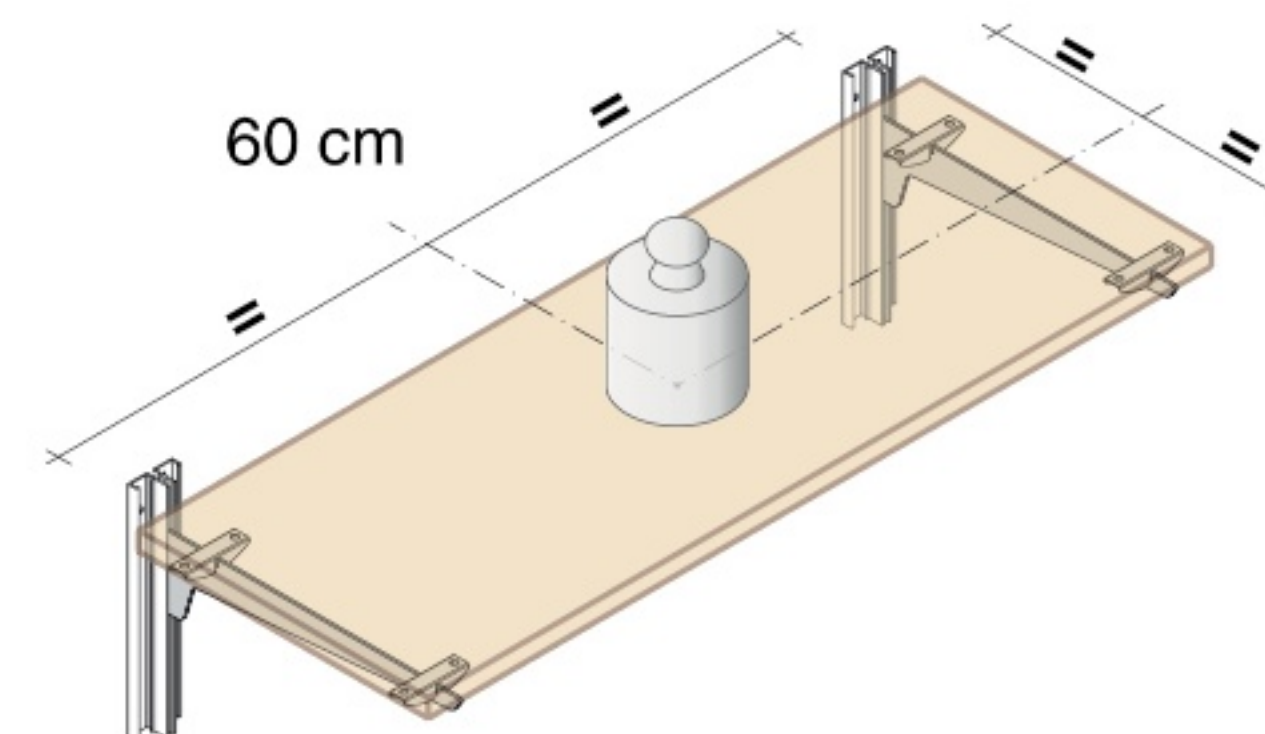

All other Fit Art supports without saddles need to be assembled according to the instruction procedure.

The capacities indicated in the load chart are the **half** of the breaking load.



For the couple of supports that exceed the limit of 200 kg, imposed during loading test, the value 100 kg is indicated.

The loading capacities of all Fit Art products result from the synergy between the manufacturing processes and the items shapes. The slavish reproduction of our products does not determine the same standards of hardness.