




# Supports for hangrail (without shelves)

NB7 DX

## ABL series - for B36 blocked hangrail rod

- Al NAT
- \* ORO
- Fe CHL
- NKS
- SAM
- \* ZIN

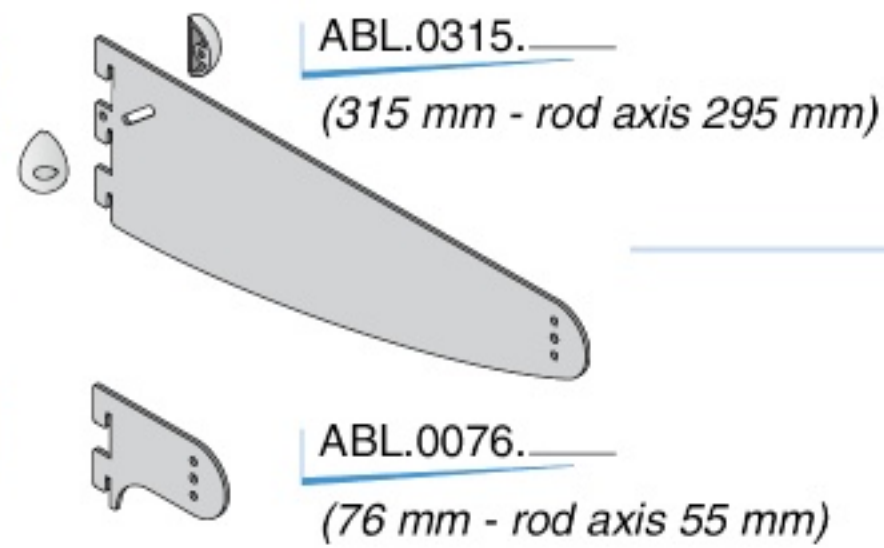

Version on request  
DX (right) and SX (left)  
for flush countersunk-head screw

ABL.D315.\_\_\_\_  
ABL.S315.\_\_\_\_

ABL.DX76.\_\_\_\_  
ABL.SX76.\_\_\_\_

- Fe CHL
- NKS
- \* OTT
- SAM
- \* ZIN

### Finishing disk



### Concealed blocking



### Screw for lateral elements

- Fe CHL
- OTT
- ZIN




### Threaded connection for central elements



NB7 SX

NB1

NB2

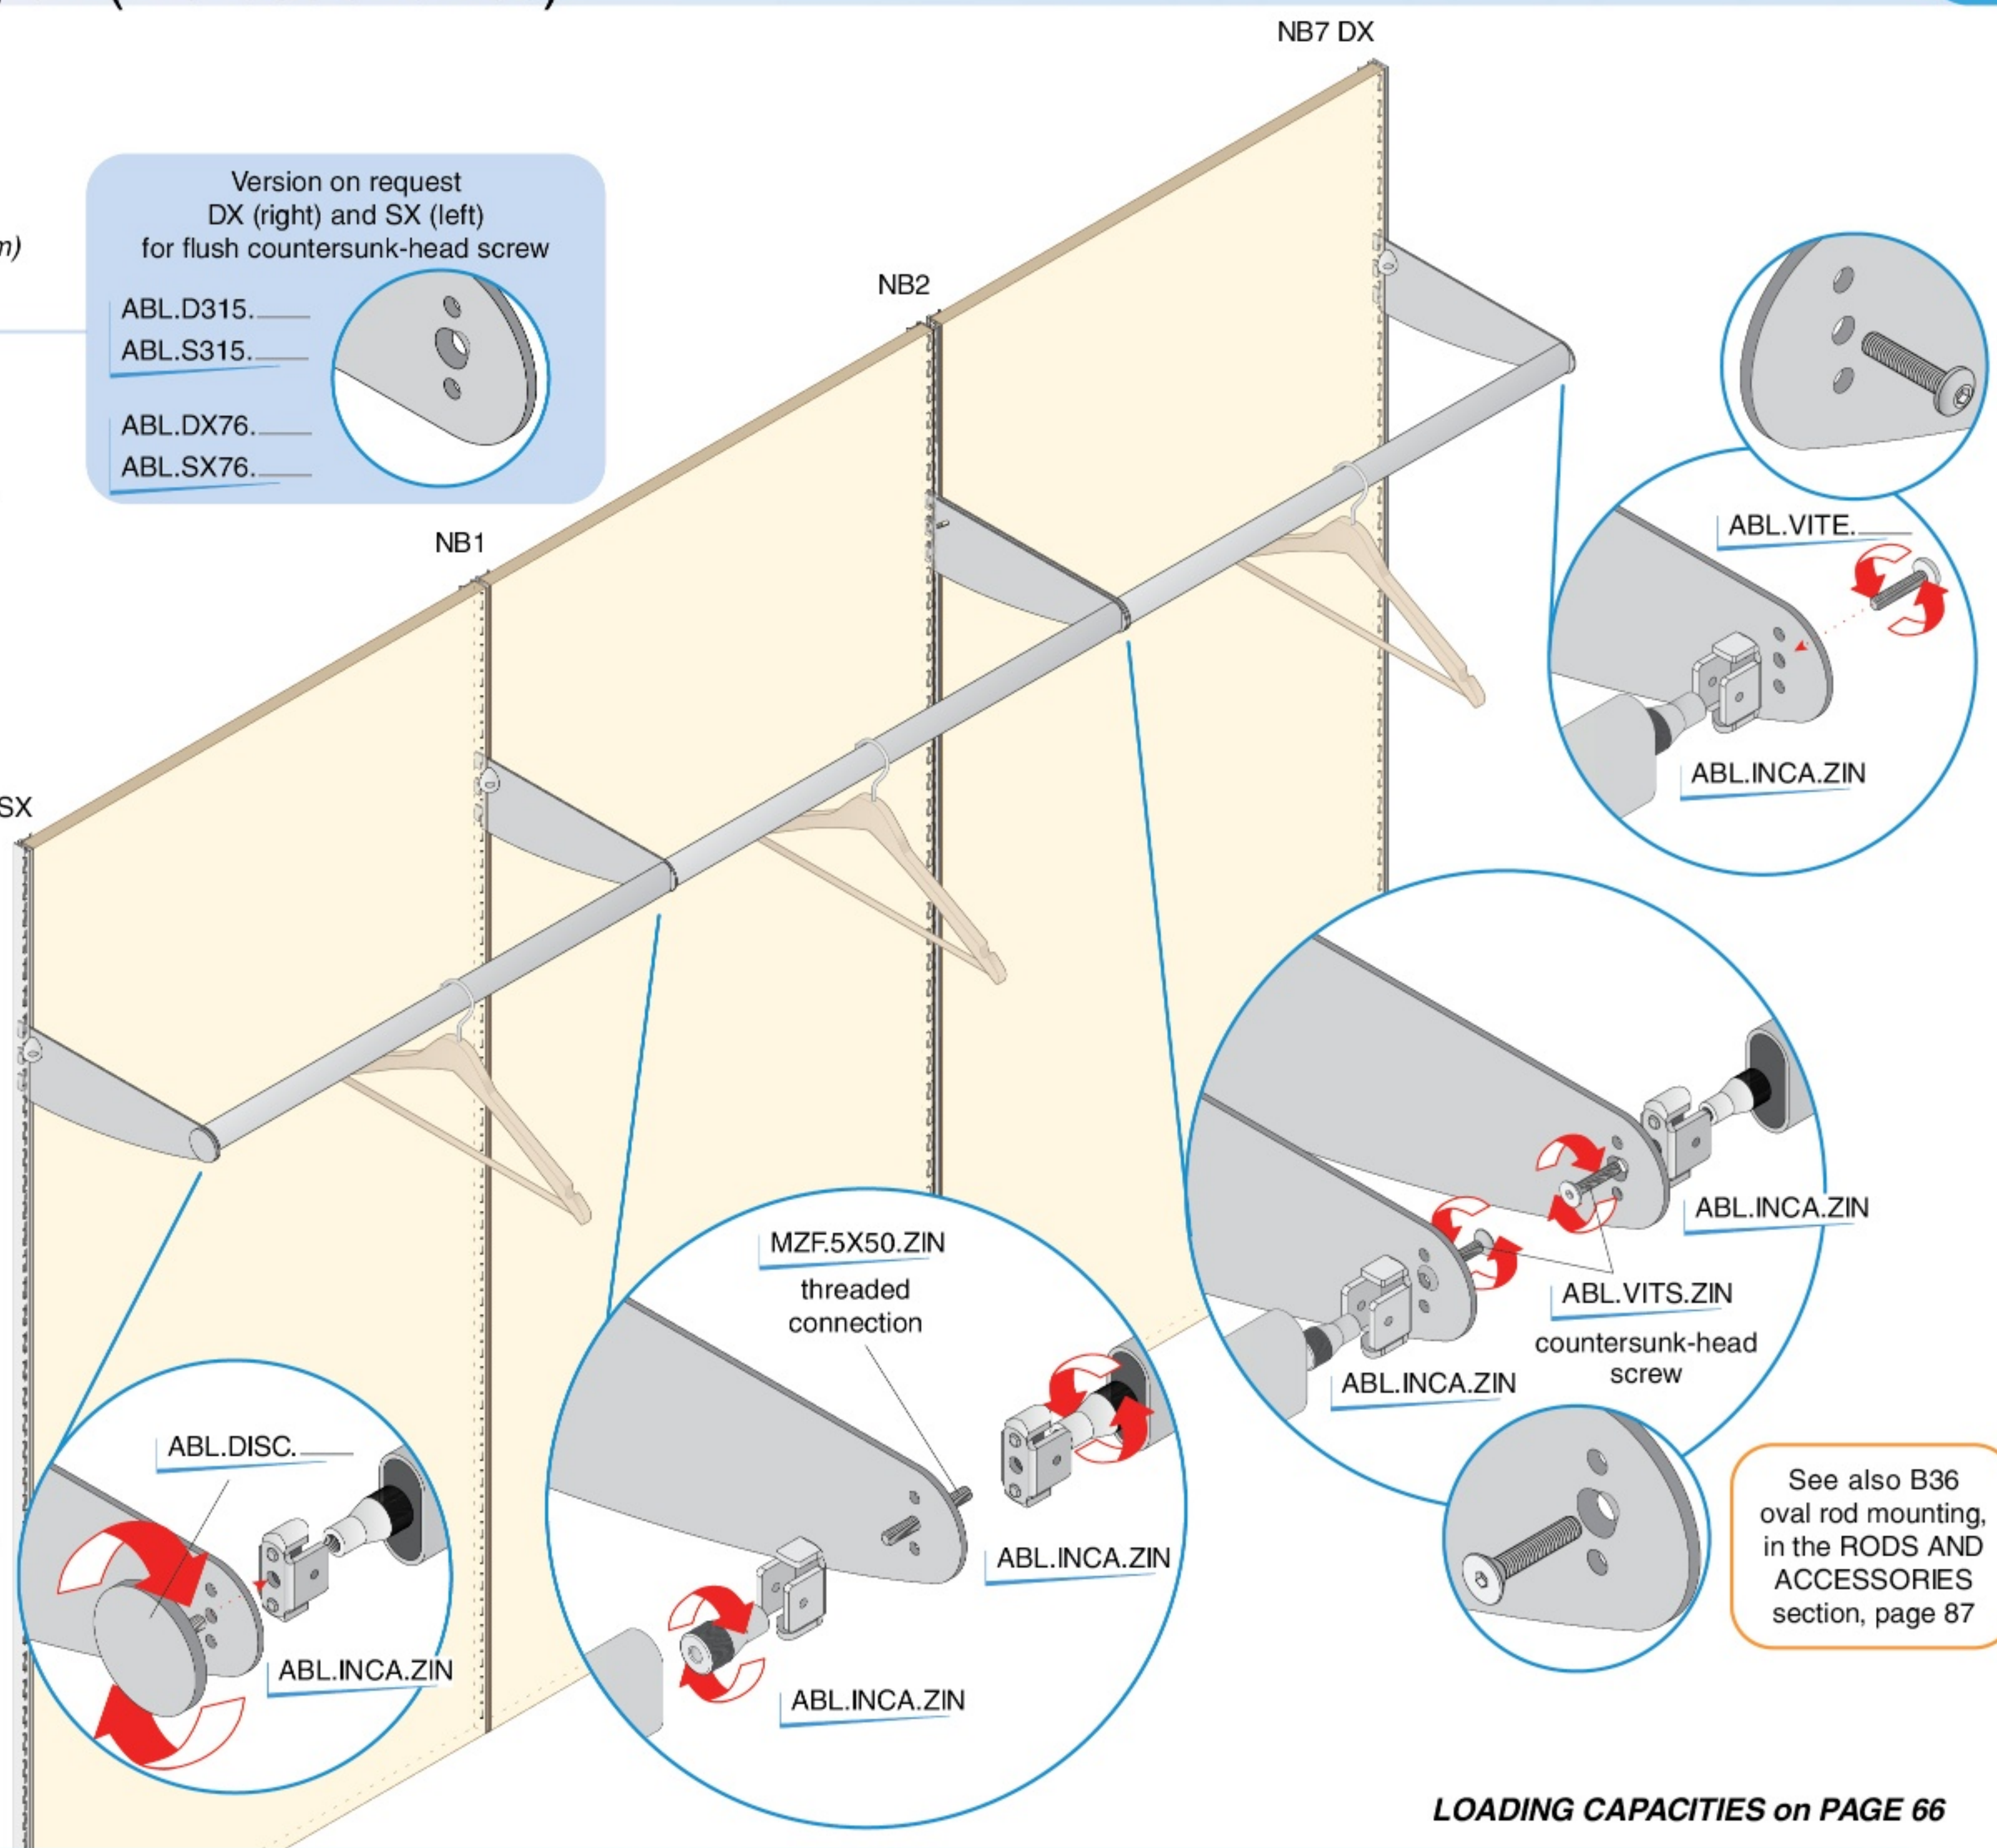

See also B36 oval rod mounting, in the RODS AND ACCESSORIES section, page 87



LOADING CAPACITIES on PAGE 66








# LOADING capacities




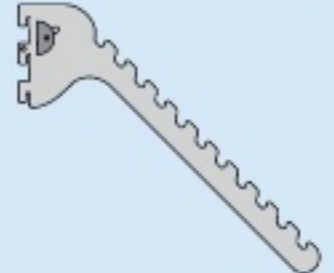
**ABL**  
blocked  
hangrail  
page 45

Supports for hangrail (without shelves)	Model	Length [mm]	Height [mm]	Load Aluminium	Load Steel
 ABL.0315	ABL.0315	315	103	60 kg	90 kg
 B36 (36x18) ABL.0076	ABL.0076	76	65	50 kg	70 kg










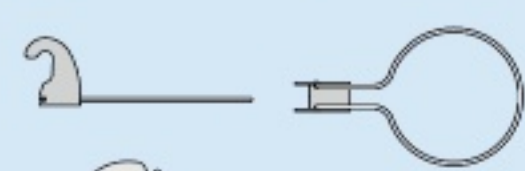
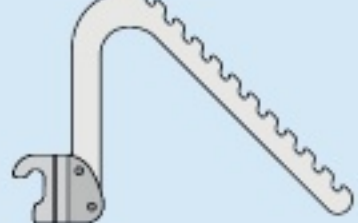
**APA**  
passing  
hangrail  
page 44

 APA.0330	APA.0330	330	100		80 kg
 B36 (36x18) APA.0175	APA.0175	175	70		80 kg
 APA.0110	APA.0110	110	60		80 kg
 APA.0068	APA.0068	68	66		100 kg
 APA.DX65 APA.SX65	APA.DX65 APA.SX65	47,5	60		40 kg





**IND**  
page 43

 IND.2009	IND.2009	285	120		50 kg each
 IND.4011	IND.4011	285	260		70 kg each


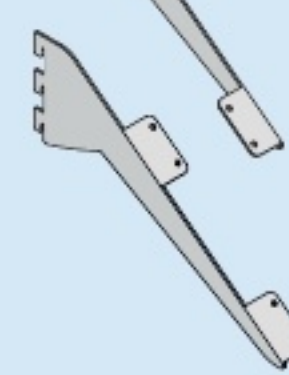
**S36**  
page 44

 S36.AR20	S36.AR20	245	74		30 kg each
 S36.AR30	S36.AR30	345	74		25 kg each
 S36.AR40	S36.AR40	445	74		20 kg each
 S36.TP20	S36.TP20	240	70		30 kg each
 S36.TP30	S36.TP30	340	70		25 kg each
 S36.TP40	S36.TP40	440	70		20 kg each
 S36.PB15	S36.PB15	200	70		12 kg each
 S36.PB20	S36.PB20	250	70		9 kg each
 S36.PB30	S36.PB30	330	70		6 kg each
 S36.AN15	S36.AN15	250	70		5 kg each
 S36.BIND	S36.BIND	330	240		70 kg each


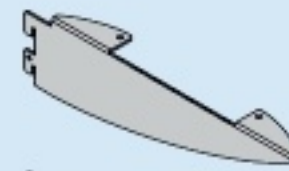
**DMN**  
fixed  
page 39

Fixed and inclined wing-shaped supports	Model	Length [mm]	Height [mm]	Load Aluminium	Load Steel
 DMN.SX29	DMN.SX29	290	75	60 kg	90 kg
 DMN.CS29	DMN.CS29	290	75	60 kg	90 kg
 DMN.CD29	DMN.CD29	290	75	60 kg	90 kg
 DMN.DX29	DMN.DX29	290	75	60 kg	90 kg




**RCL**  
inclined  
fixed  
page 39

 RCL.DX35	RCL.DX35				
 RCL.SX35	RCL.SX35	270	190	40 kg	60 kg

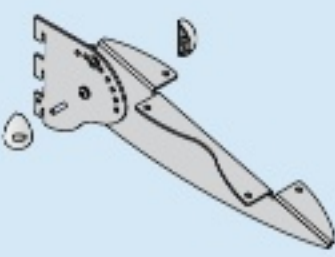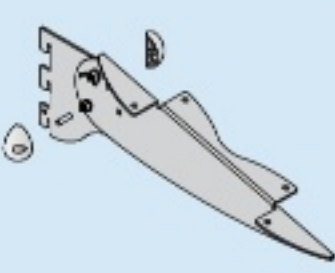


**DJA**  
adjustable  
inclined  
page 39

 DJA.CS27	DJA.CS27	318	100/315	70 kg	110 kg
 DJA.CD27	DJA.CD27	318	100/315	70 kg	110 kg








**PFM**  
adjustable  
inclined  
page 39

 PFM.CN55	PFM.CN55	103	111		70 kg
 PFM.SX55	PFM.SX55	103	111		70 kg
 PFM.DX55	PFM.DX55	103	111		70 kg

**PFT**  
adjustable  
inclined  
page 39

 PFT.CN55	PFT.CN55	103	111		70 kg
 PFT.SX55	PFT.SX55	103	111		70 kg
 PFT.DX55	PFT.DX55	103	111		70 kg

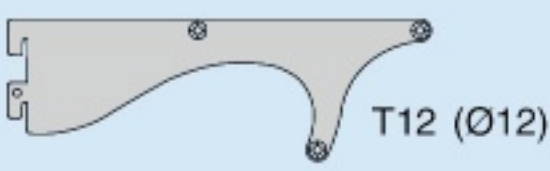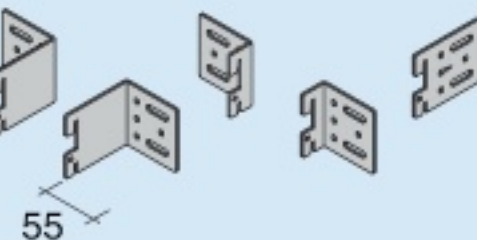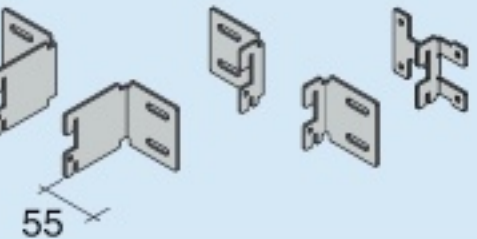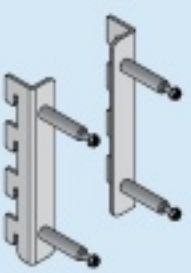


	Specific accessories	Model	Length [mm]	Height [mm]	Load Aluminium	Load Steel
SKA Shoe rack page 56	 T12 (Ø12)	SKA.DX03 SKA.SX03 SKA.CN03	236	83	5 kg	
PAK page 58	 55	PAK.DX PAK.SX	10 / 50	55		100 kg
PAT page 58	 55	PAT.DX PAT.SX	10 / 50	55		100 kg
MFX page 59		MFX.DX96 MFX.SX96	11	140		100 kg
GNC page 63		GNC.D302	45	56	10 kg each	20 kg each
TAC page 63		TAC.L700	20	37	10 kg	20 kg each
		TAC.T700	24	15	10 kg	

Loading capacity evaluation for single element, on 4 resting points.

## LOADING CAPACITY EVALUATION METHOD

The capacities indicated here refer to a couple of supports with saddles that undergo the following loading test:

- Assembly of 2 slotted profiles, perfectly parallel, suitably fixed at 60 cm distance from each other and fixed to the wall according to the instruction;
- fixing of 2 Fit Art supports to the slotted profiles at the equal height;
- assembly of 4 saddles, two for each support;
- positioning of a 70 cm length shelf on supports, equipped with saddles, with 5 cm overhang on each side (for saddles see pag. 35);
- positioning of the load centered on the shelf (the load is evenly distributed to simulate real application).

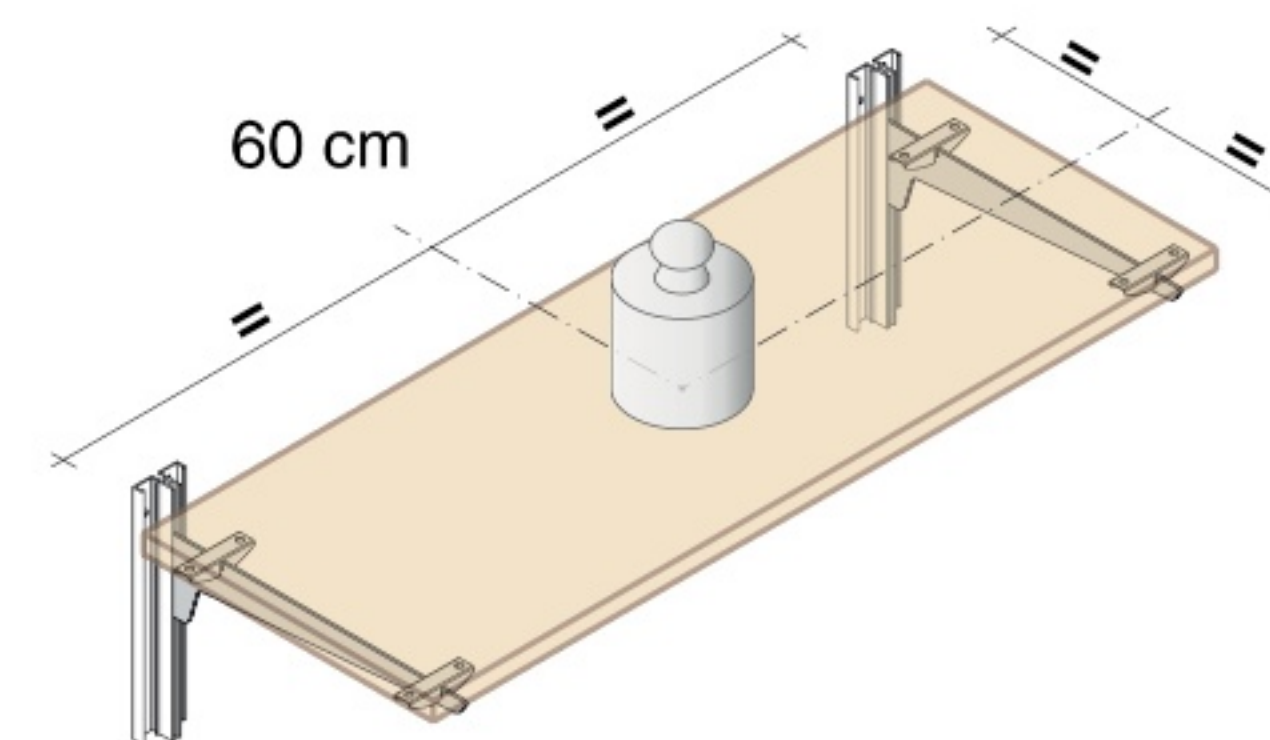

All other Fit Art supports without saddles need to be assembled according to the instruction procedure.

The capacities indicated in the load chart are the **half** of the breaking load.



For the couple of supports that exceed the limit of 200 kg, imposed during loading test, the value 100 kg is indicated.

The loading capacities of all Fit Art products result from the synergy between the manufacturing processes and the items shapes. The slavish reproduction of our products does not determine the same standards of hardness.