


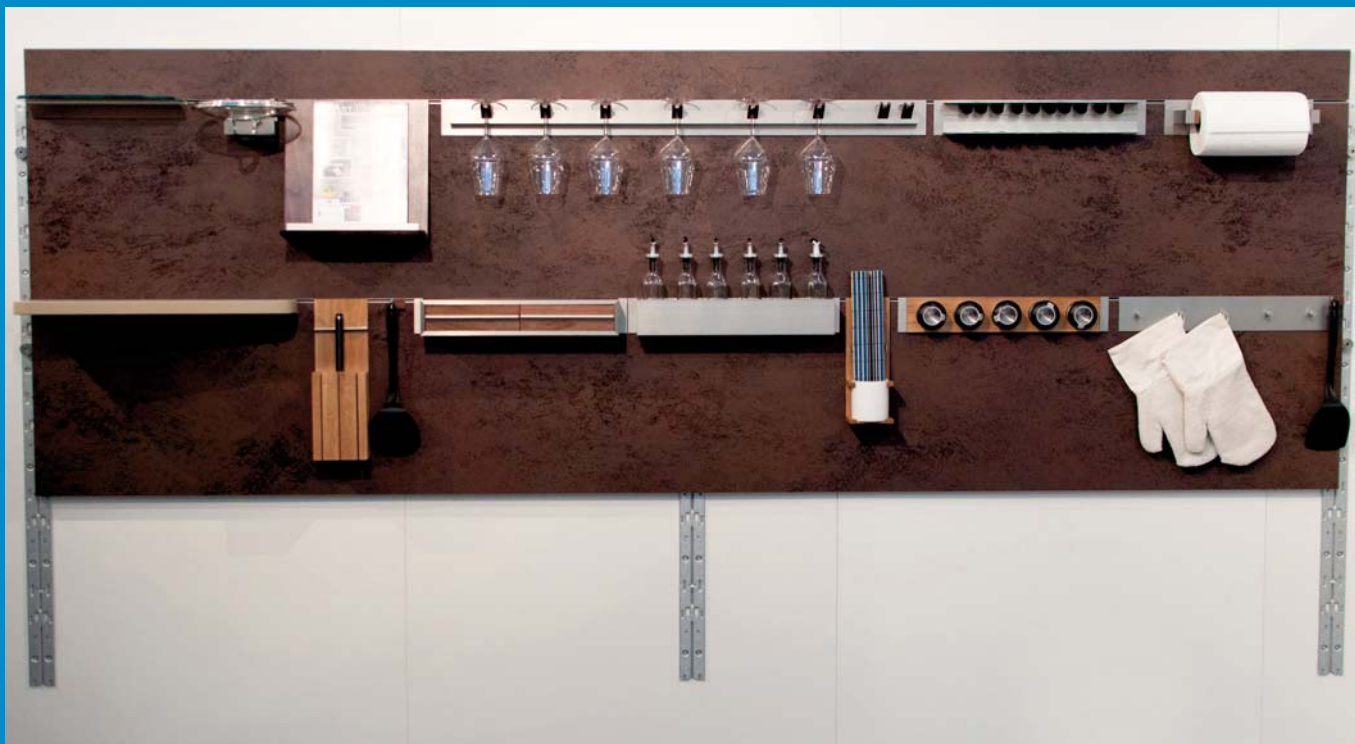

n
e
w
s

20
15

**Stone or composite wall cladding.
Thickness from 10 mm.**

M4 SCREW

**+
ADHESIVE
SHOCK ABSORBING
WASHER**









**+
STEEL
PIN**



**PRESS IN
SELF-ANCHORING
THREADED INSERT M6**



**2
CROWNS**



Average
pull-out
strength
up to

170
kg

250
kg


290
kg

350
kg

M4 SCREW


**+
PRESS IN
SELF-ANCHORING
THREADED
INSERT M4**

**4
CROWNS**



Average
pull-out
strength
up to

350
kg



solid surfaces



marble

granite



agglomerates / ceramics

**Sandwich panelling.
Thickness from 10 mm.**

M4 SCREW


**+
ADHESIVE
SHOCK ABSORBING
WASHER**

**+
STEEL
PIN**



**THREADED
FERRULES M6**

**+
DEFORMATION
THREADED
INSERT**



sandwich panels



light stones