Supports with shaped rectangular section 25 x 15 - for horizontal and single point support

22H series - aluminium supports for 22 mm thick wood shelves

Al NAT
* LUX



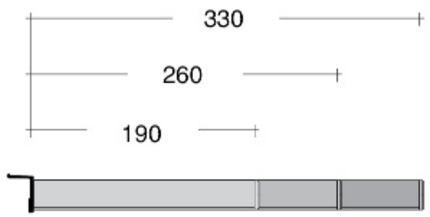

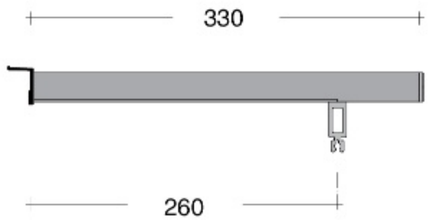

left	central	right
		

Lengths from 190 to 330 mm, other sizes on request

22H.S190.	22H.C190.	22H.D190.
22H.S260.	22H.C260.	22H.D260.
22H.S330.	22H.C330.	22H.D330.

22H.S33A.	22H.C33A.	22H.D33A.

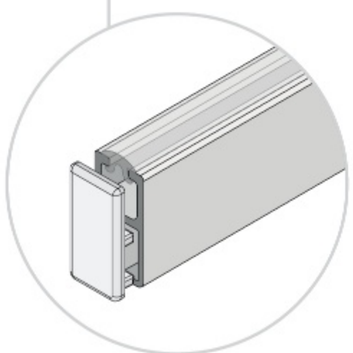

Finishing end cap

R30.TMFI.CHL
R30.TMFI.NER*
R30.TMFI.NKS



Hangrail 30 x 15 mm

R30.3000.ANE*
R30.3000.SLX
R30.3000.NAT



Gasket

G30.12MT.TRA



LOADING CAPACITIES on PAGE 80

LOADING capacities

ALUMINIUM supports	Model	Length [mm]	Height [mm]	Load [kg]	Distance L [cm]
25H page 79	25H.0150	150	30	-- kg	60 cm
	25H.0190	190	30	-- kg	60 cm
	25H.0260	260	30	-- kg	60 cm
	25H.0330	330	30	-- kg	60 cm
	25H.033A	330	30	-- kg	60 cm
22H page 78	22H.D190				
	22H.C190	190	30	-- kg	60 cm
	22H.S190				
	22H.D260				
	22H.C260	260	30	-- kg	60 cm
	22H.S260				
	22H.D330				
	22H.C330	330	30	-- kg	60 cm
	22H.S330				
	22H.D33A				
	22H.C33A	330	30	-- kg	60 cm
	22H.S33A				

ALUMINIUM supports	Model	Length [mm]	Height [mm]	Load [kg]	Distance L [cm]
SHT page 77	SHT.1205	50	30	14 kg	30 cm
	SHT.1210	100	30	12 kg	30 cm
	SHT.1215	150	30	10 kg	30 cm
	SHT.1220	200	30	8 kg	30 cm
H30 page 76	H30.FS06	600	30		
	H30.FS03	300	30		
HV8 page 76	HV8.G060	600	44		
	HV8.G030	300	44		
	HV8.G004	45	44		

LOADING capacities

	STEEL supports	Model	Length [mm]	Height [mm]	Load [kg]	Distance L [cm]
TOH page 77	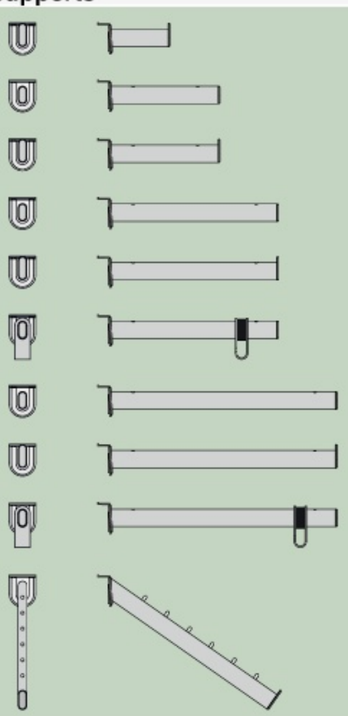	TOH.010S	100	55	40 kg	60 cm
		TOH.018P	180	50	40 kg	60 cm
		TOH.018S	180	55	40 kg	60 cm
		TOH.028P	280	50	35 kg	60 cm
		TOH.028S	280	55	35 kg	60 cm
		TOH.A28P	280	70	35 kg	60 cm
		TOH.038P	380	50	30 kg	60 cm
		TOH.038S	380	55	30 kg	60 cm
		TOH.A38P	380	70	30 kg	60 cm
		TOH.IN07	290	230	25 kg	60 cm
SHB page 77		SHB.PB10	120	50	7 kg	10 cm
		SHB.PB15	170	50	6 kg	10 cm
		SHB.PB20	220	50	5 kg	10 cm
		SHB.PB25	270	50	4 kg	10 cm
SHF page 77		SHF.PB10	100	5	6 kg	10 cm
		SHF.PB15	150	5	5 kg	10 cm
		SHF.PB20	200	5	4 kg	10 cm
SHQ page 77		SHQ.PB10	100	40	7 kg	10 cm
		SHQ.PB15	150	40	6 kg	10 cm
		SHQ.PB20	200	40	5 kg	10 cm
		SHQ.PB25	250	40	4 kg	10 cm

LOADING CAPACITY EVALUATION METHOD
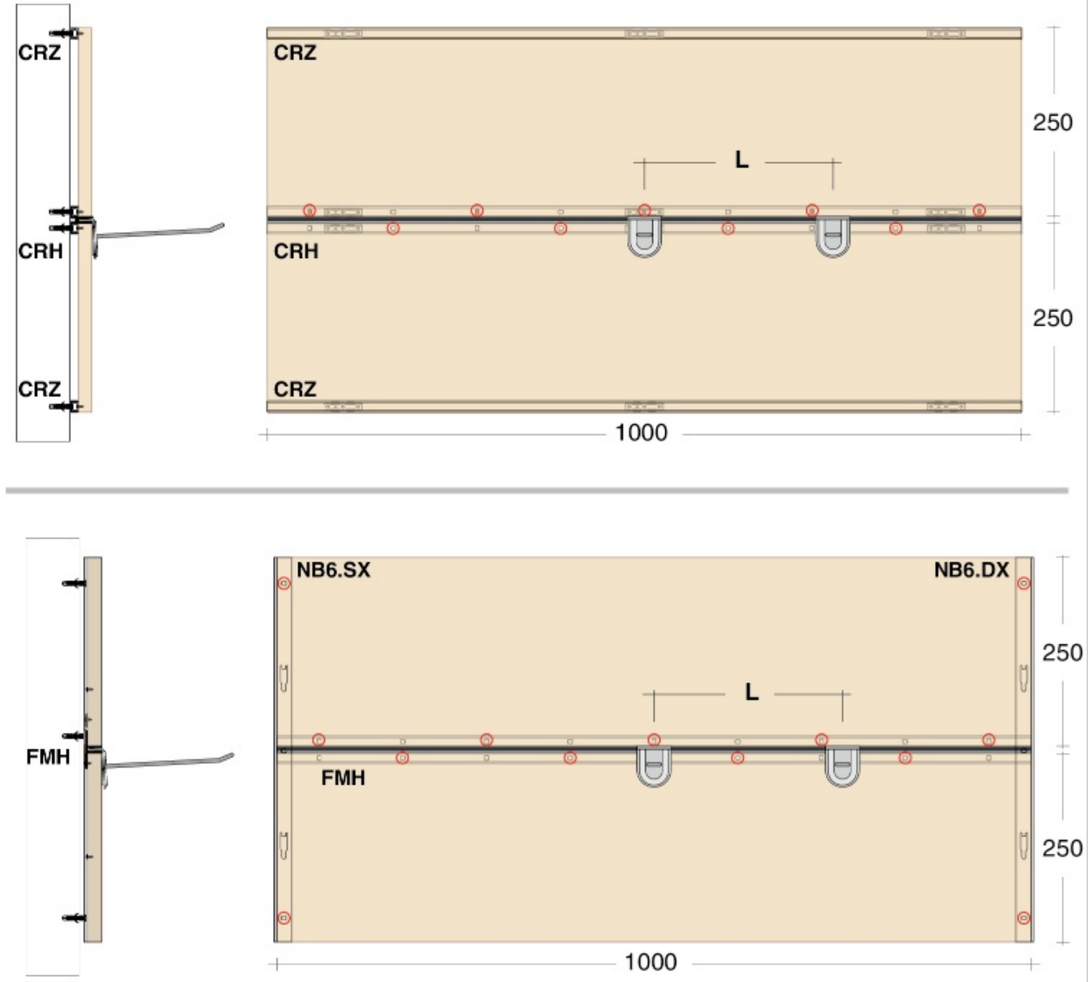
- All profiles fixing points that are involved in the load maintain are highlited in red color.
- Tested supports are placed in the middle of the profile with an evenly distributed load.
- '**L**' indicates the minimal distance between two equal supports necessary to guarantee the indicated load capacity.