



Removable horizontal supports on horizontal series

AI
NAT

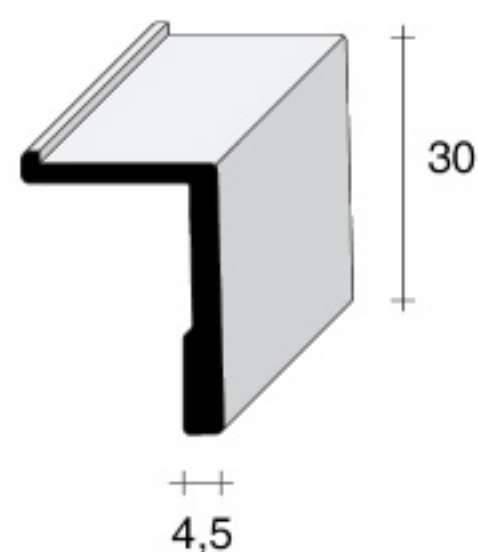


H30

- H30.1000. - 1000 mm
- H30.2000. - 2000 mm
- H30.3000. - 3000 mm
- H30.FS03. - 300 mm
- H30.FS06. - 600 mm

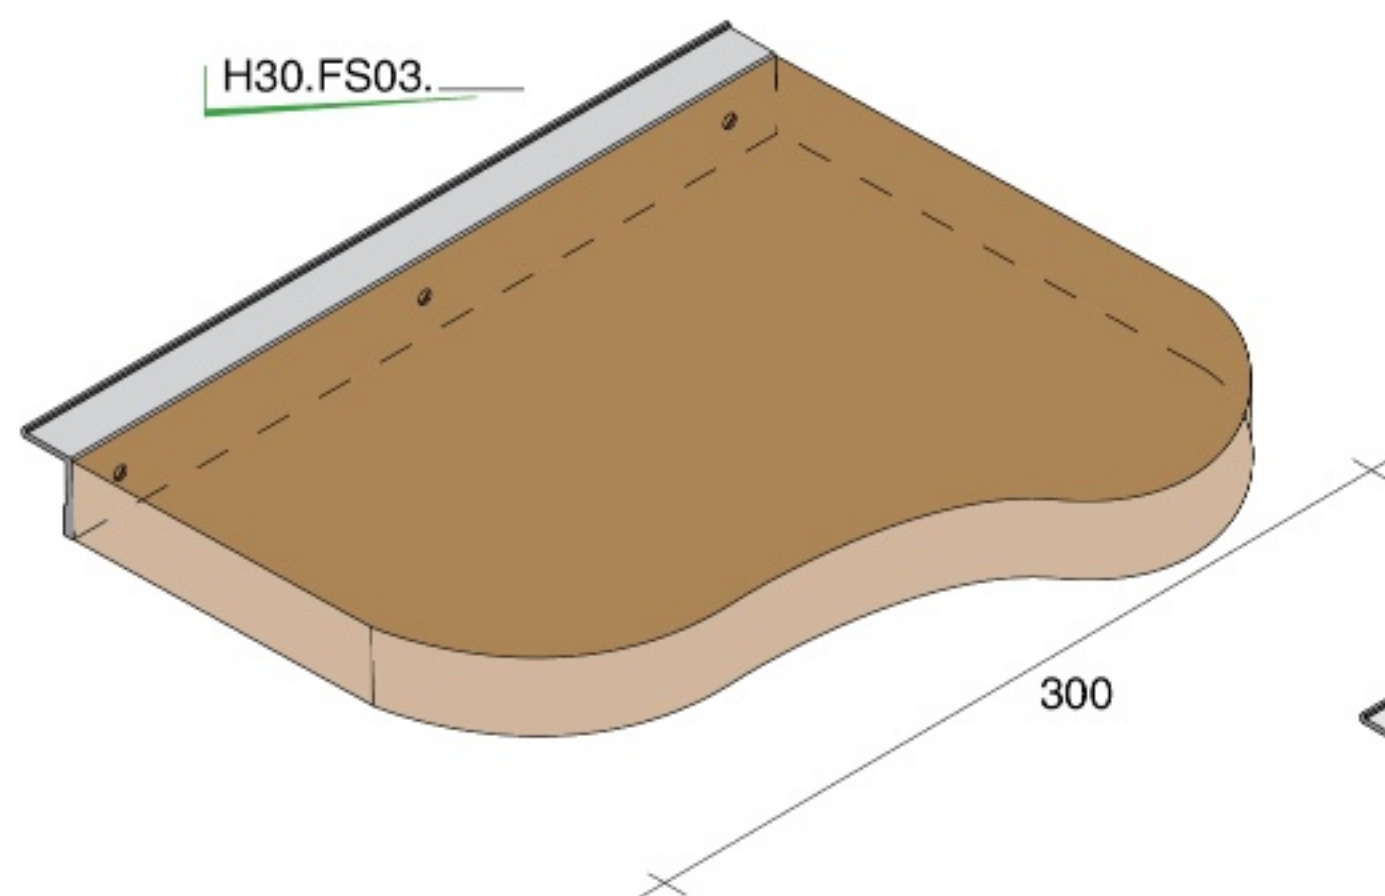

countersunk
holes
Ø 5,2

H30.FS06.

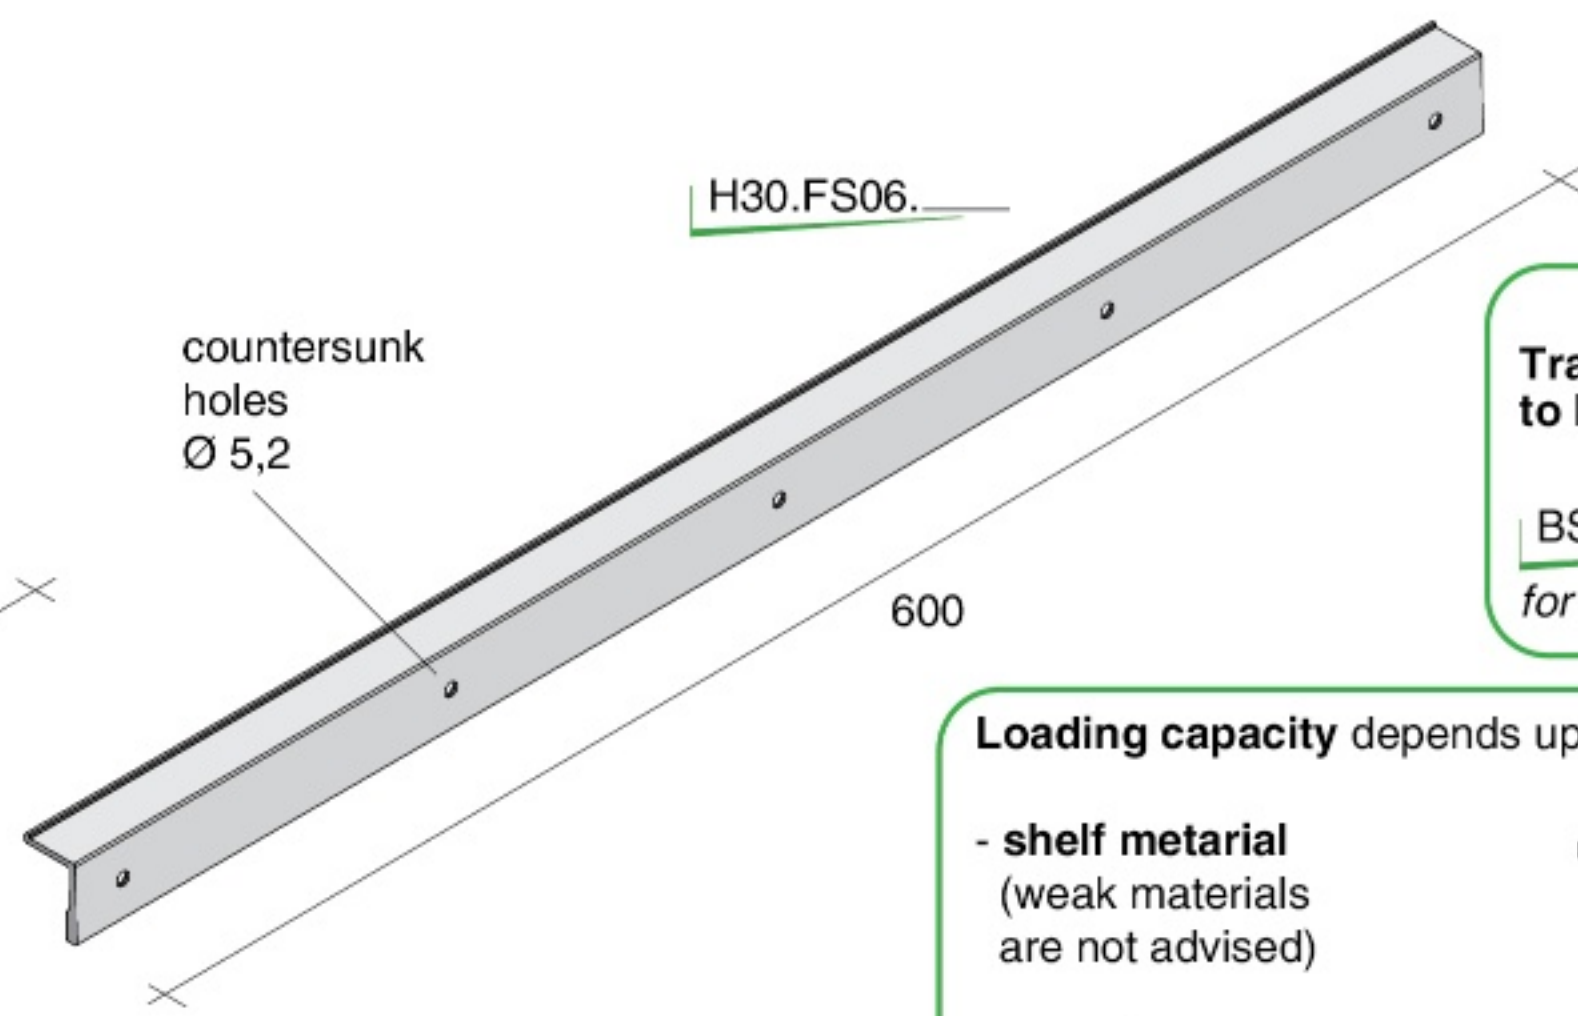


Transparent gasket
to block support

BSH.3000.TRA
for H30 5,5


Loading capacity depends upon:

- shelf material
(weak materials
are not advised)
- type of assembly:
screw diameter and length

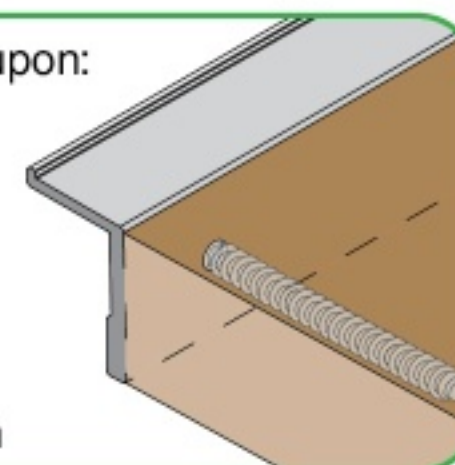



H30 and HV8 load behaviour is optimal if supports are
used for the whole length of the shelf or glass

AI
NAT
LUX

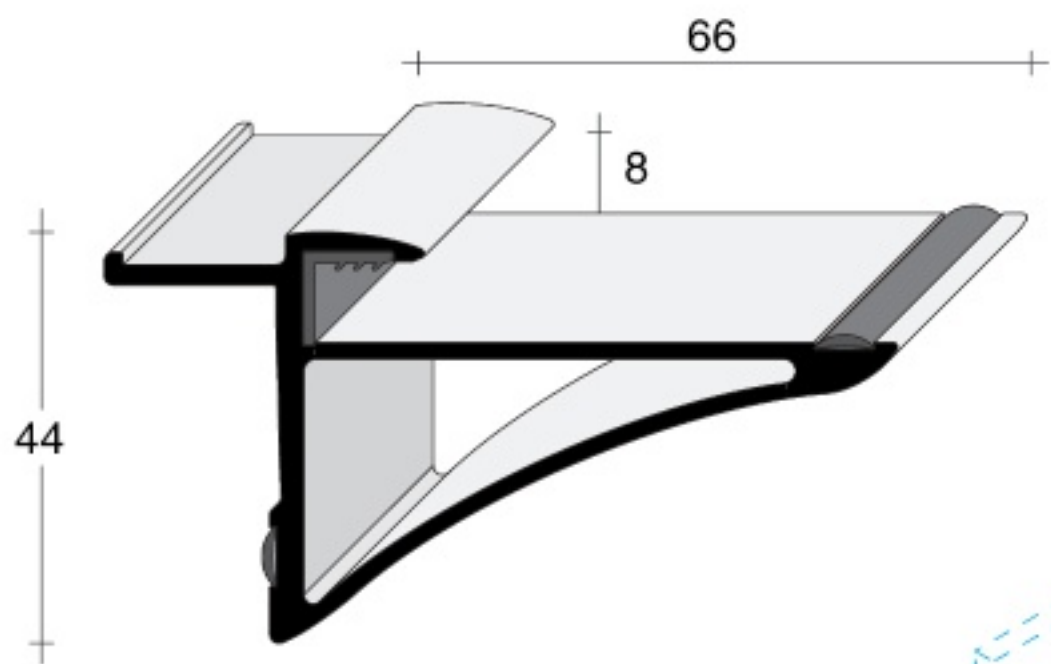


HV8 - for 8 mm thick glass shelves

- HV8.G030. - 300 mm
- HV8.G060. - 600 mm
- HV8.G300. - 3000 mm
- HV8.G004. - 45 mm

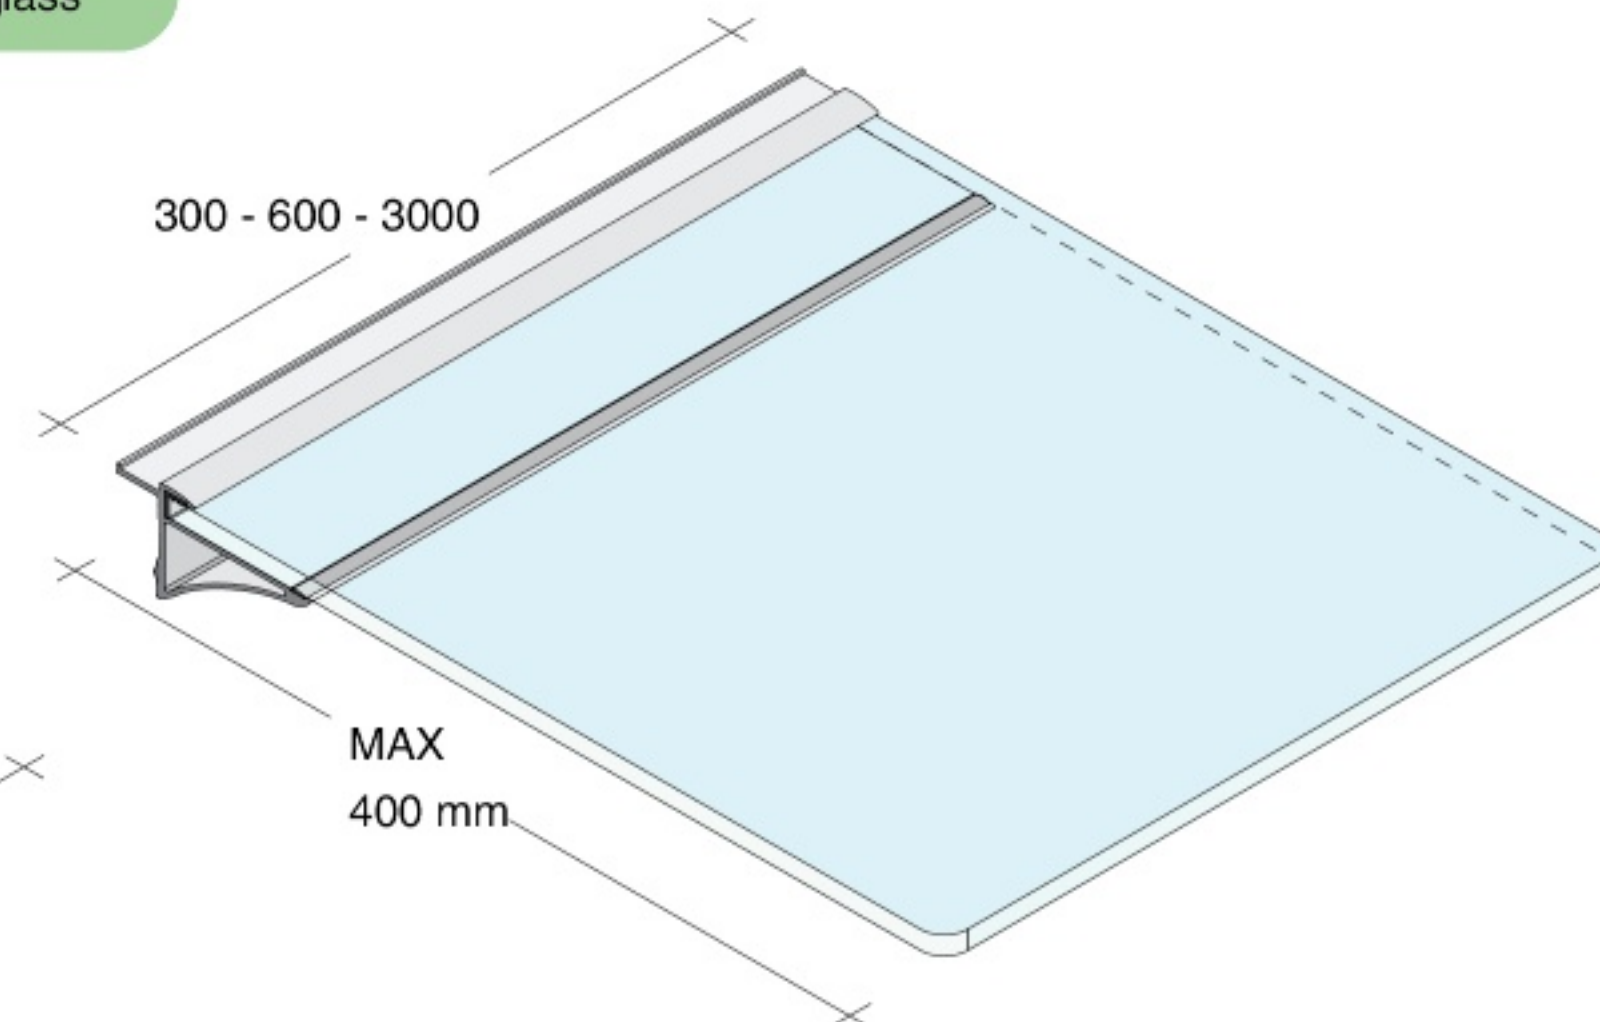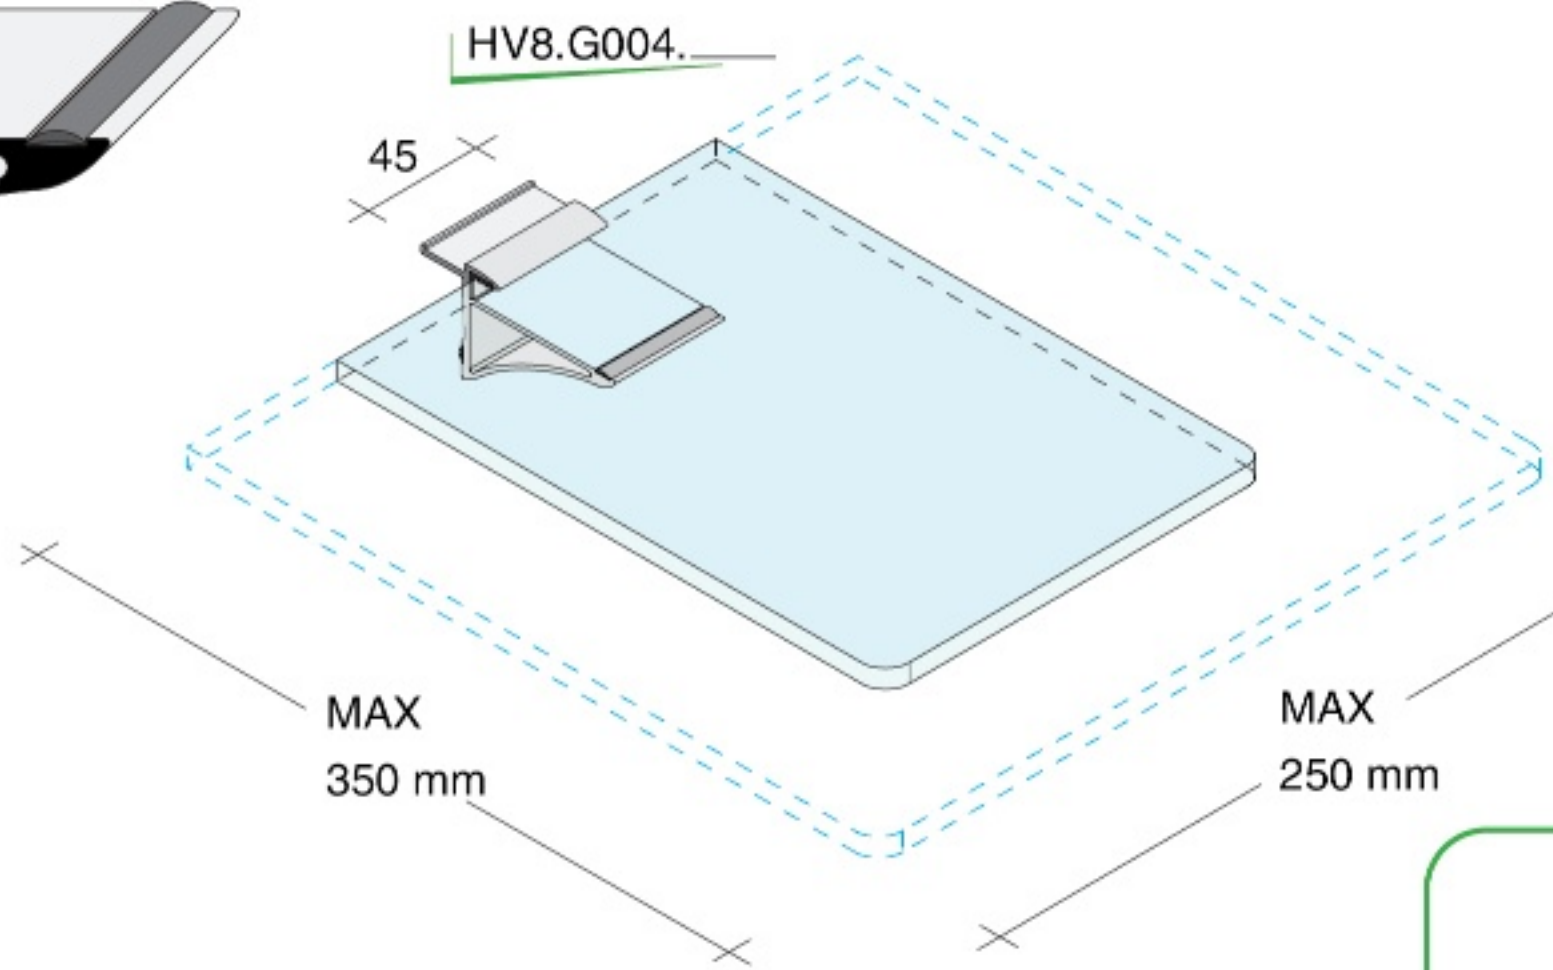

Insert the **gasket on
the back** to balance
the support in case of
panels thick < 19 mm

To insert the **frontal gasket** press by
finger tip on the whole length

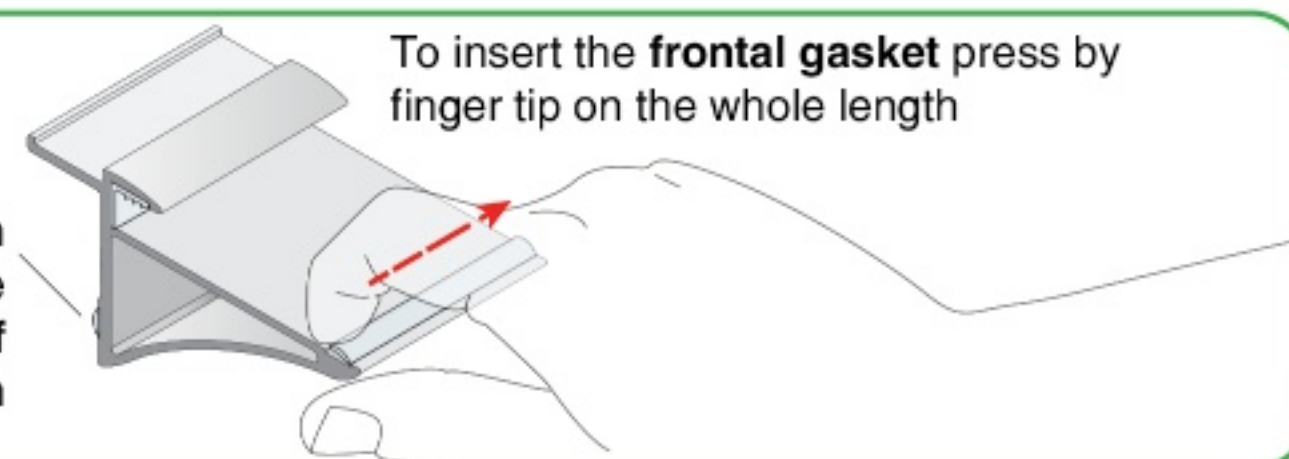

LOADING CAPACITIES on PAGE 80



25H

page 79

ALUMINIUM supports	Model	Length [mm]	Height [mm]	Load [kg]	Distance L [cm]
	25H.0150	150	30	-- kg	60 cm
	25H.0190	190	30	-- kg	60 cm
	25H.0260	260	30	-- kg	60 cm
	25H.0330	330	30	-- kg	60 cm
	25H.033A	330	30	-- kg	60 cm

22H

page 78

	22H.D190	190	30	-- kg	60 cm
	22H.C190				
	22H.S190				
	22H.D260	260	30	-- kg	60 cm
	22H.C260				
	22H.S260				
	22H.D330	330	30	-- kg	60 cm
	22H.C330				
	22H.S330				
	22H.D33A	330	30	-- kg	60 cm
	22H.C33A				
	22H.S33A				

SHT

page 77

ALUMINIUM supports	Model	Length [mm]	Height [mm]	Load [kg]	Distance L [cm]
	SHT.1205	50	30	14 kg	30 cm
	SHT.1210	100	30	12 kg	30 cm
	SHT.1215	150	30	10 kg	30 cm
	SHT.1220	200	30	8 kg	30 cm

H30

page 76

	H30.FS06	600	30		
	H30.FS03	300	30		

HV8






page 76

	HV8.G060	600	44		
	HV8.G030	300	44		
	HV8.G004	45	44		



LOADING capacities

TOH
page 77

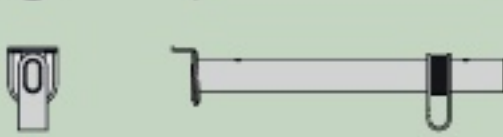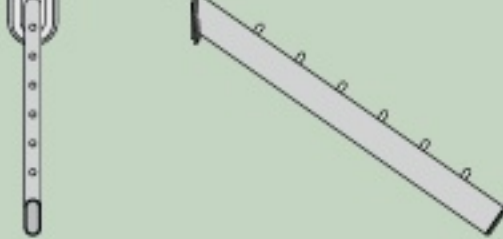STEEL supports	Model	Length [mm]	Height [mm]	Load [kg]	Distance L [cm]
	TOH.010S	100	55	40 kg	60 cm
	TOH.018P	180	50	40 kg	60 cm
	TOH.018S	180	55	40 kg	60 cm
	TOH.028P	280	50	35 kg	60 cm
	TOH.028S	280	55	35 kg	60 cm
	TOH.A28P	280	70	35 kg	60 cm
	TOH.038P	380	50	30 kg	60 cm
	TOH.038S	380	55	30 kg	60 cm
	TOH.A38P	380	70	30 kg	60 cm
	TOH.IN07	290	230	25 kg	60 cm


SHB
page 77

	SHB.PB10	120	50	7 kg	10 cm
	SHB.PB15	170	50	6 kg	10 cm
	SHB.PB20	220	50	5 kg	10 cm
	SHB.PB25	270	50	4 kg	10 cm

SHF
page 77

	SHF.PB10	100	5	6 kg	10 cm
	SHF.PB15	150	5	5 kg	10 cm
	SHF.PB20	200	5	4 kg	10 cm

SHQ
page 77

	SHQ.PB10	100	40	7 kg	10 cm
	SHQ.PB15	150	40	6 kg	10 cm
	SHQ.PB20	200	40	5 kg	10 cm
	SHQ.PB25	250	40	4 kg	10 cm

LOADING CAPACITY EVALUATION METHOD

- All profiles fixing points that are involved in the load maintain are highlighted in red color.
- Tested supports are placed in the middle of the profile with an evenly distributed load.
- 'L' indicates the minimal distance between two equal supports necessary to guarantee the indicated load capacity.

