

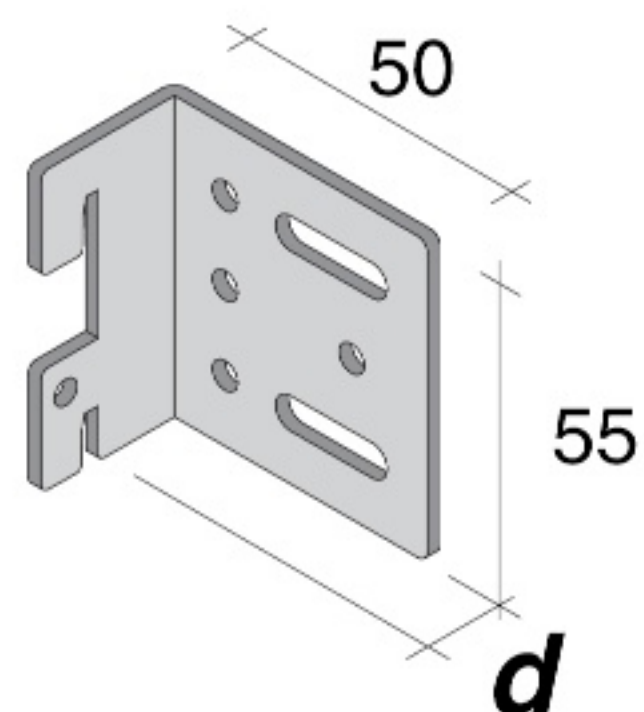
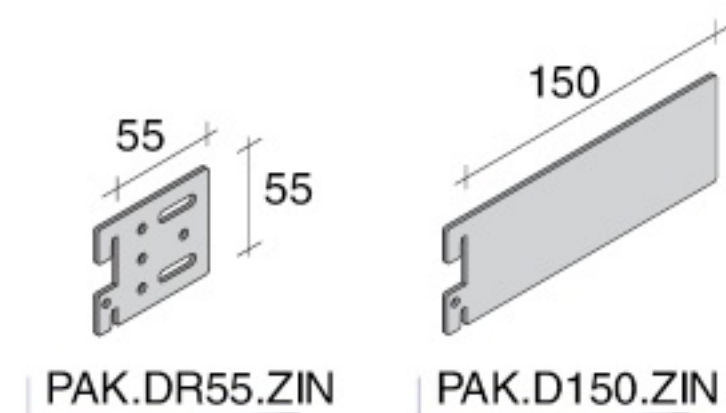
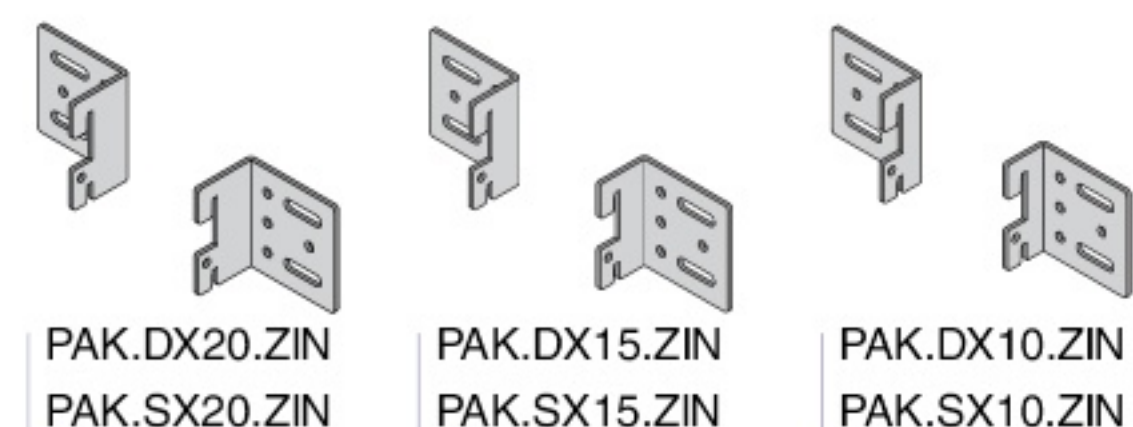


PLATES/BRACKETS






PAK series - holding plates/brackets

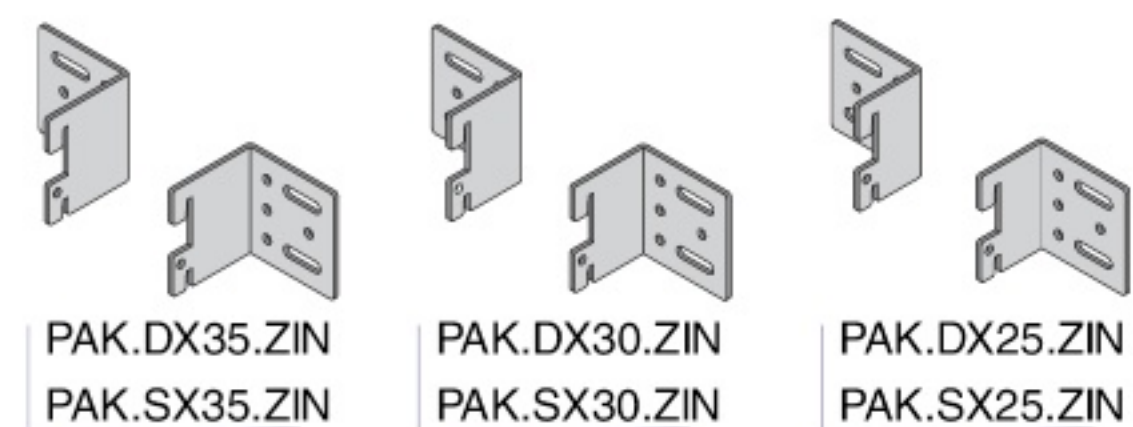

d = 10/15/20/25/30
35/40/45/50 mm

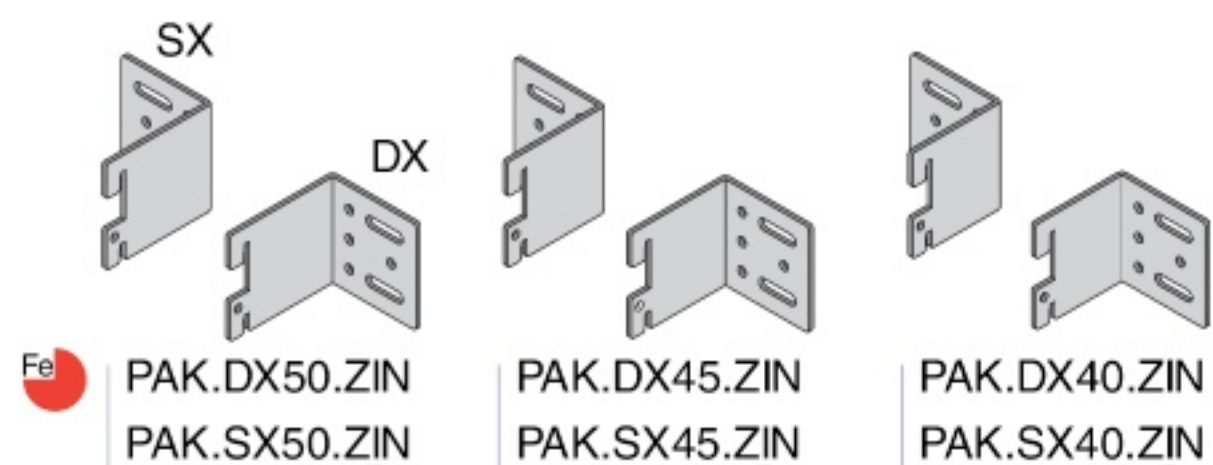

PAT series - plates which allow sliding movement of OSW and OSA horizontal profiles

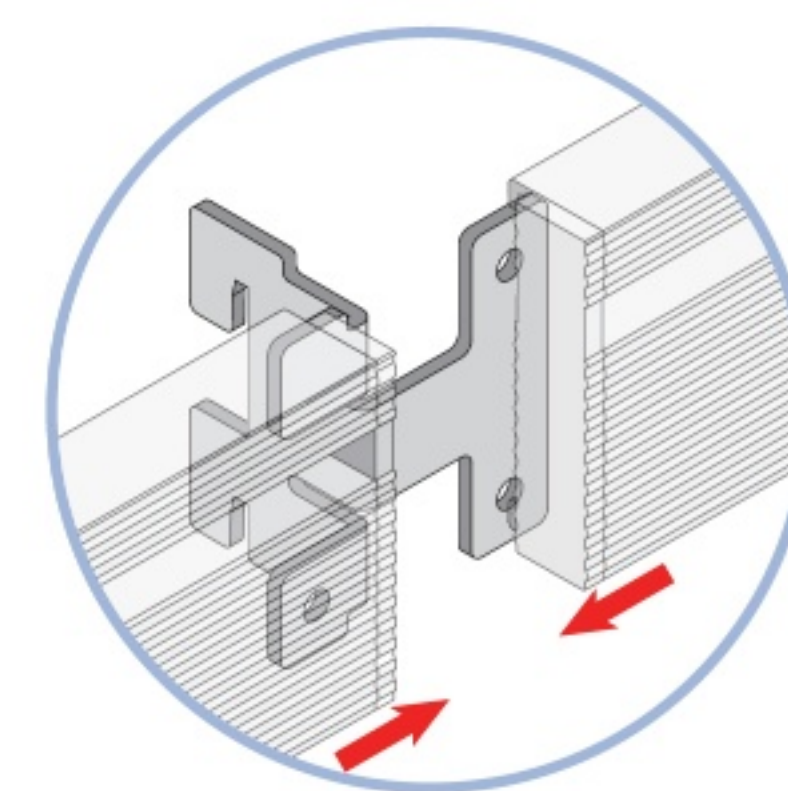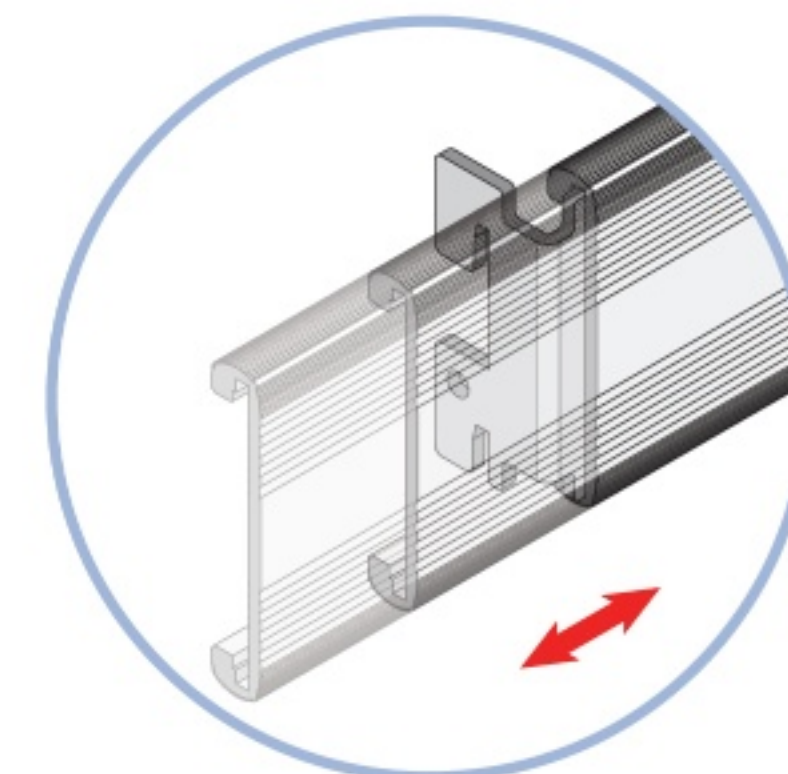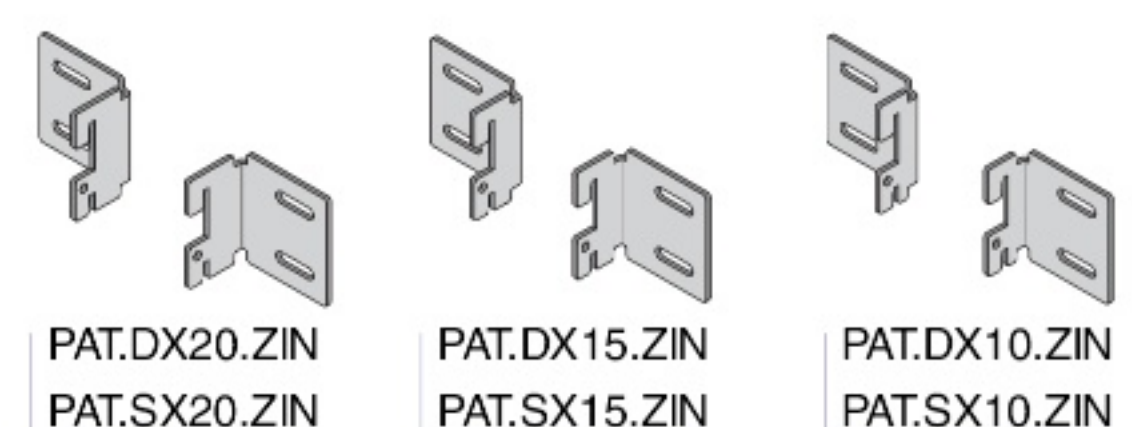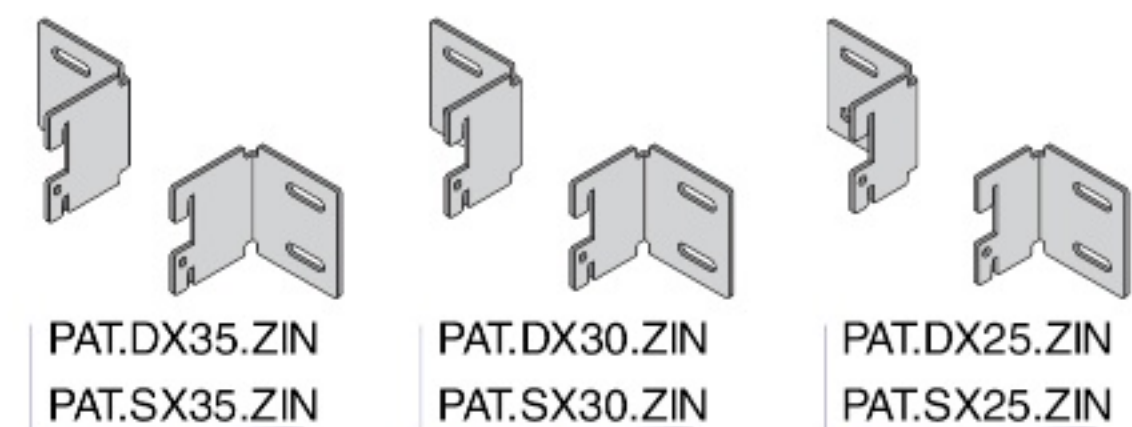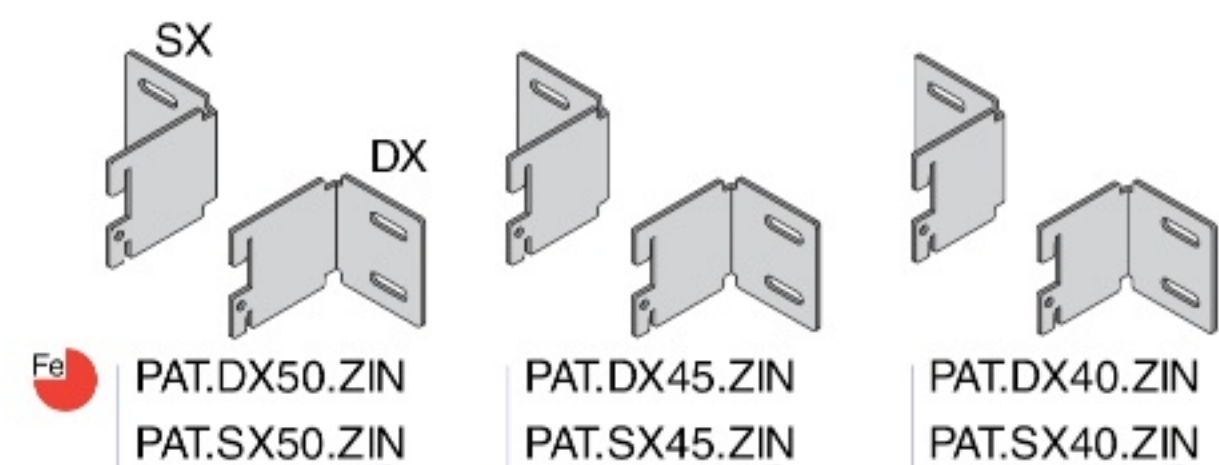


LOADING CAPACITIES on PAGE 69




LOADING capacities

SKA
Shoe rack
page 56

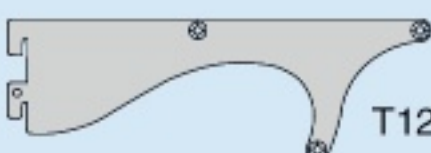Specific accessories	Model	Length [mm]	Height [mm]	Load Aluminium	Load Steel
 T12 (Ø12)	SKA.DX03 SKA.SX03 SKA.CN03	236	83	5 kg	


PAK
page 58

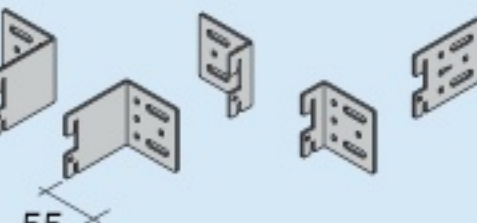Specific accessories	Model	Length [mm]	Height [mm]	Load Aluminium	Load Steel
 55	PAK.DX PAK.SX	10 / 50	55		100 kg


PAT
page 58

Specific accessories	Model	Length [mm]	Height [mm]	Load Aluminium	Load Steel
 55	PAT.DX PAT.SX	10 / 50	55		100 kg



MFX
page 59

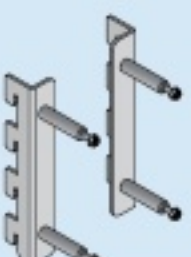Specific accessories	Model	Length [mm]	Height [mm]	Load Aluminium	Load Steel
	MFX.DX96 MFX.SX96	11	140		100 kg

GNC
page 63

Specific accessories	Model	Length [mm]	Height [mm]	Load Aluminium	Load Steel
	GNC.D302	45	56	10 kg each	20 kg each

TAC
page 63


Specific accessories	Model	Length [mm]	Height [mm]	Load Aluminium	Load Steel
	TAC.L700	20	37	10 kg	20 kg each
	TAC.T700	24	15	10 kg	

Loading capacity evaluation for single element, on 4 resting points.

LOADING CAPACITY EVALUATION METHOD

The capacities indicated here refer to a couple of supports with saddles that undergo the following loading test:

- Assembly of 2 slotted profiles, perfectly parallel, suitably fixed at 60 cm distance from each other and fixed to the wall according to the instruction;
- fixing of 2 Fit Art supports to the slotted profiles at the equal height;
- assembly of 4 saddles, two for each support;
- positioning of a 70 cm length shelf on supports, equipped with saddles, with 5 cm overhang on each side (for saddles see pag. 35);
- positioning of the load centered on the shelf (the load is evenly distributed to simulate real application).

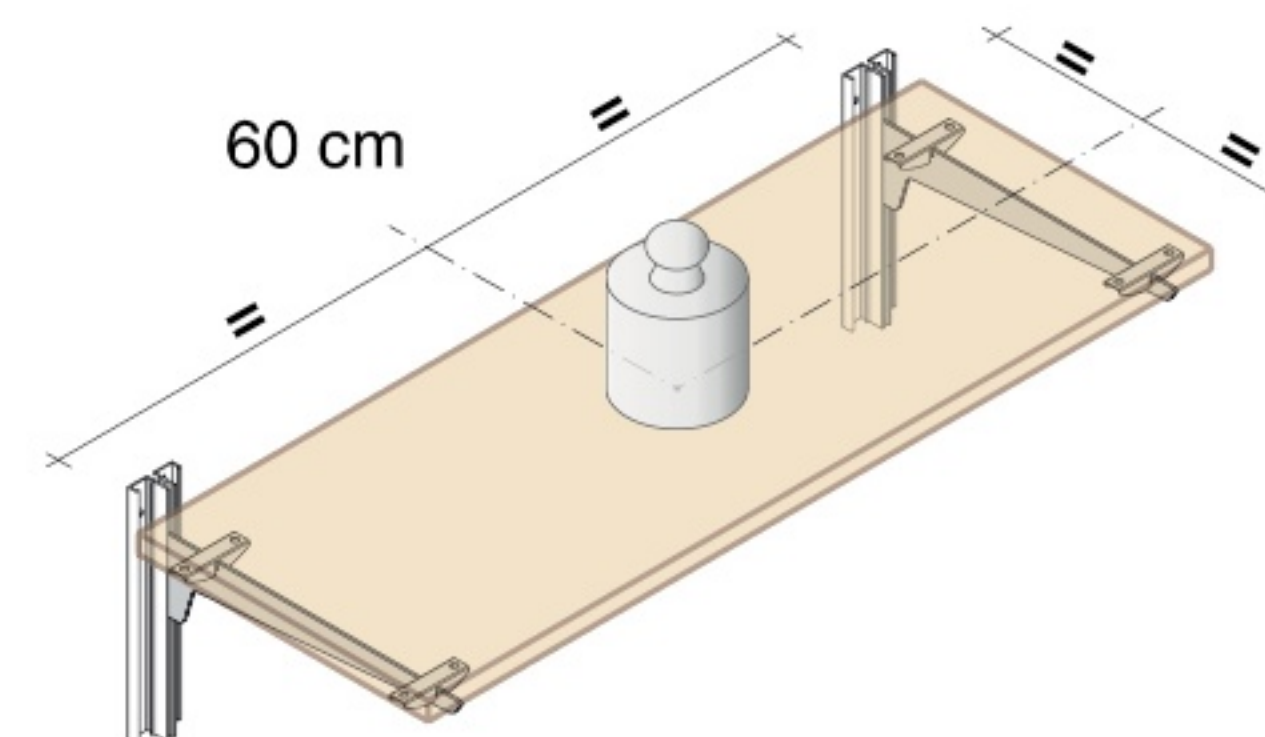

All other Fit Art supports without saddles need to be assembled according to the instruction procedure.

The capacities indicated in the load chart are the **half** of the breaking load.



For the couple of supports that exceed the limit of 200 kg, imposed during loading test, the value 100 kg is indicated.

The loading capacities of all Fit Art products result from the synergy between the manufacturing processes and the items shapes. The slavish reproduction of our products does not determine the same standards of hardness.