


SUPPORTS FOR GLASSES


free

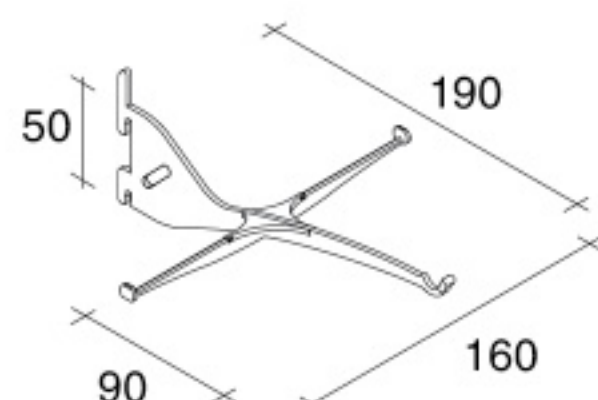

POC

POC.00NP.ARG
POC.00NP.TRA

with blocking
device **PRS**

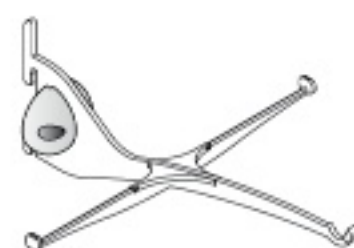

POC

POC.1000.ARG - grey
POC.1000.TRA - grey
POC.2000.TRA - chromium-plated
POC.3000.TRA - gold
POC.4000.TRA - brass-plated
POC.5000.TRA - satinized

PRS
blocking device



POC.2000.TRA - with chromium-plated PRS






POC.1000.ARG - with grey PRS

BLOCKING DEVICE

PRS


- PRS.1000.ARG grey
- PRS.2000.CHL chromium-plated
- PRS.3000.ORO gold
- PRS.4000.OTT brass-plated
- PRS.5000.NKS satinized

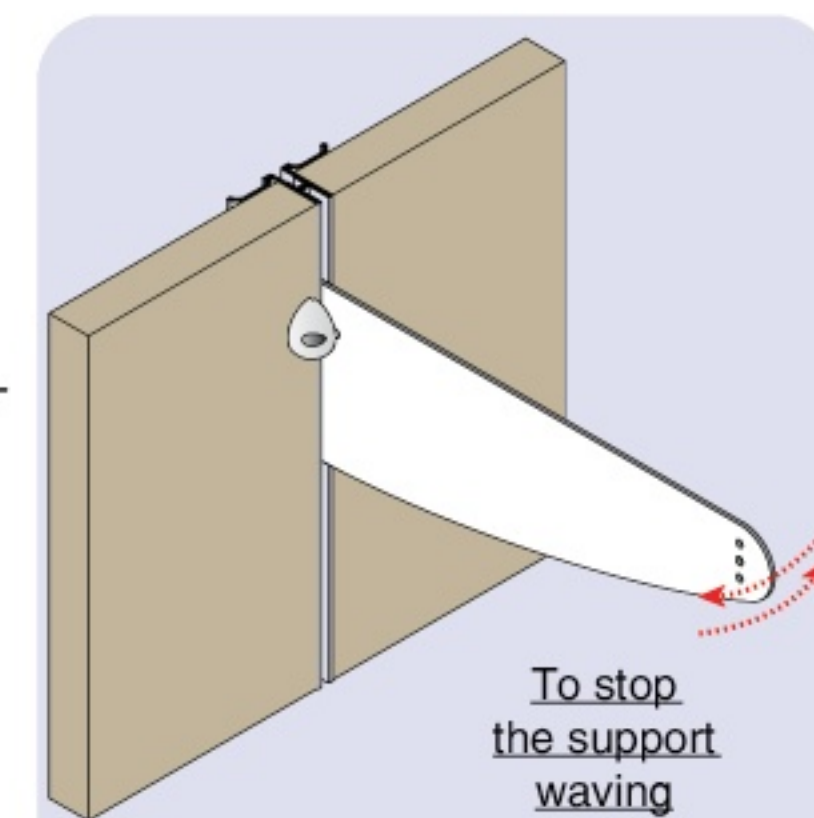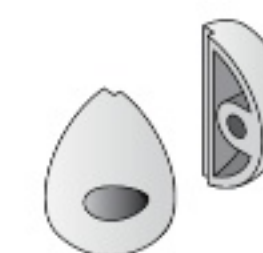

Optional on: **WMP series - APA series**
ABL.0315 - DJA

MINI-SUPPORTS

GNC

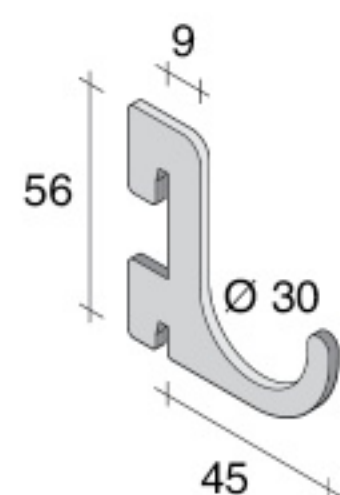

GNC.D302.NAT
GNC.D302.ORO

GNC.D302.ZIN

EDM series





EDM.080P.




EDM.080F.

**Materials and
finishings**
page 33


TAC series

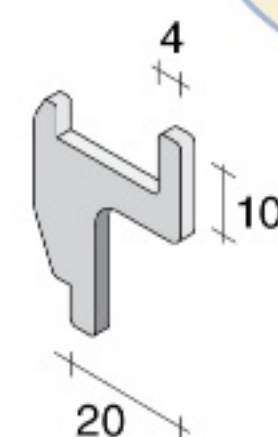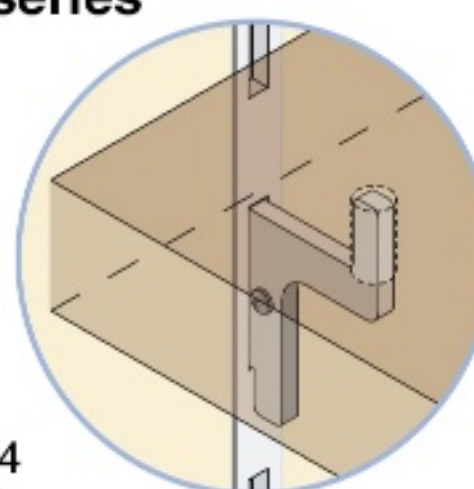


TAC.L700.NAT
TAC.L700.LUX*
TAC.L700.ORO

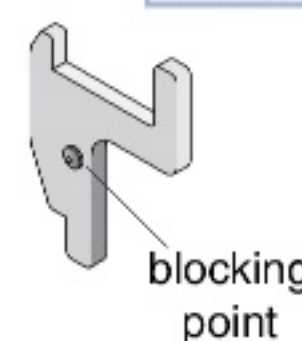

TAC.L700.ZIN

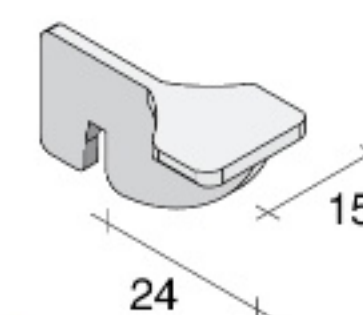

TAC.T700.NAT
TAC.T700.LUX*
TAC.T700.ORO
TAC.T700.ANE

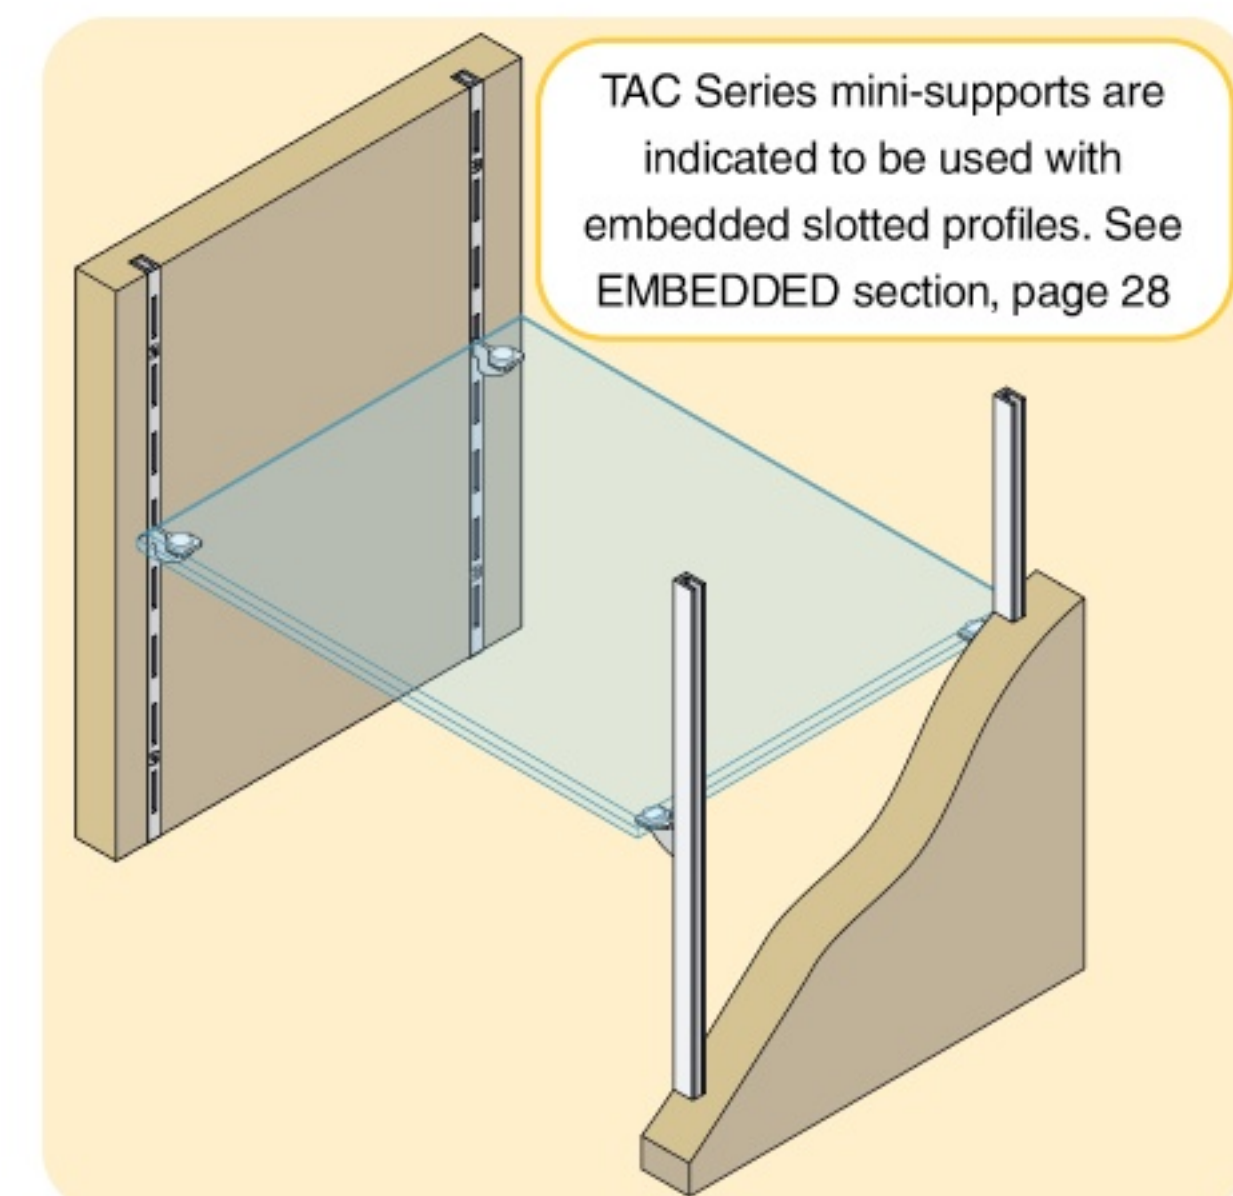

LOADING CAPACITIES on PAGE 69





Supports with saddles for wood/glass shelves


Saddles - instructions for use on page 35

FIT
ART


EDM series - from 80 to 380 mm

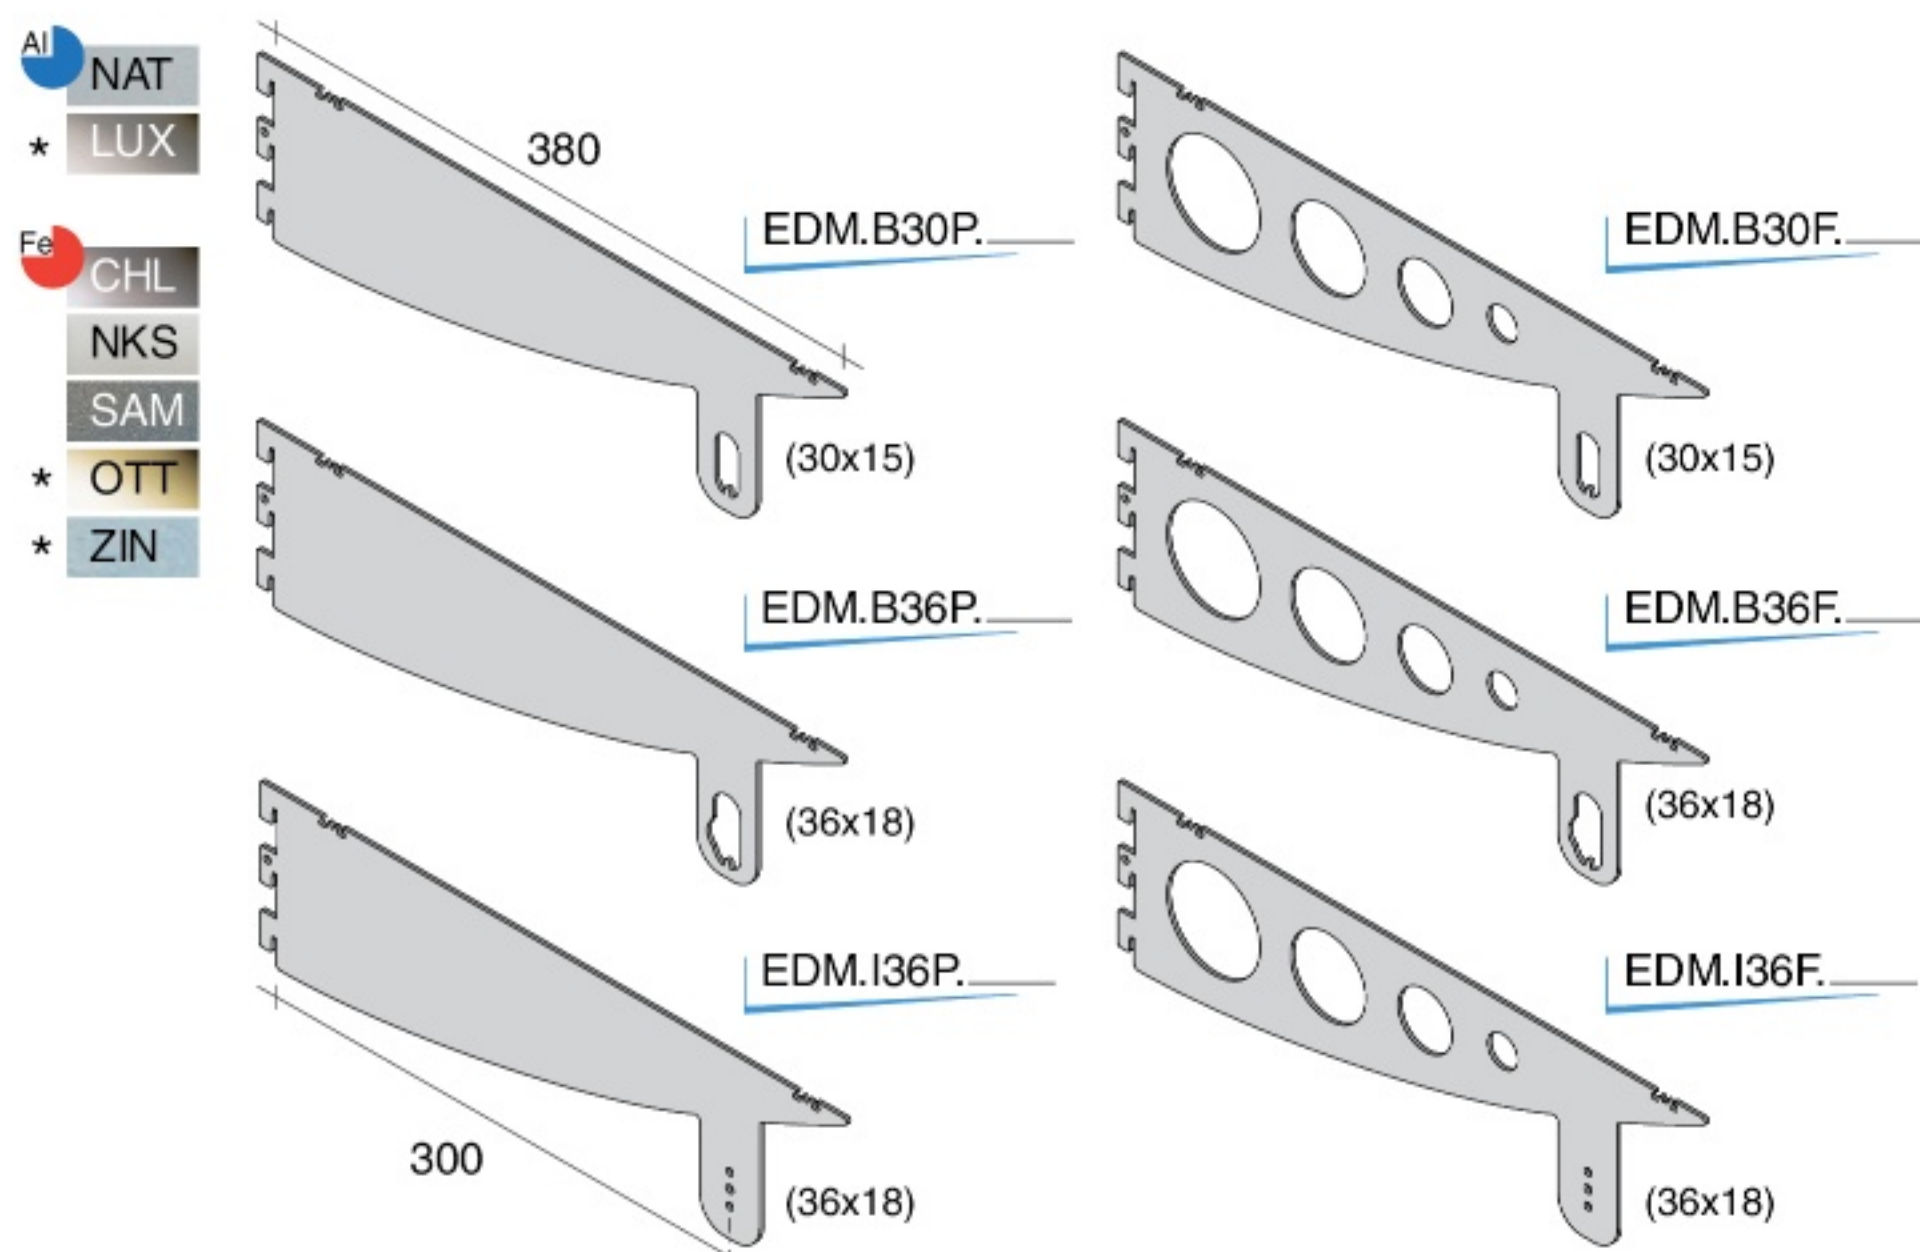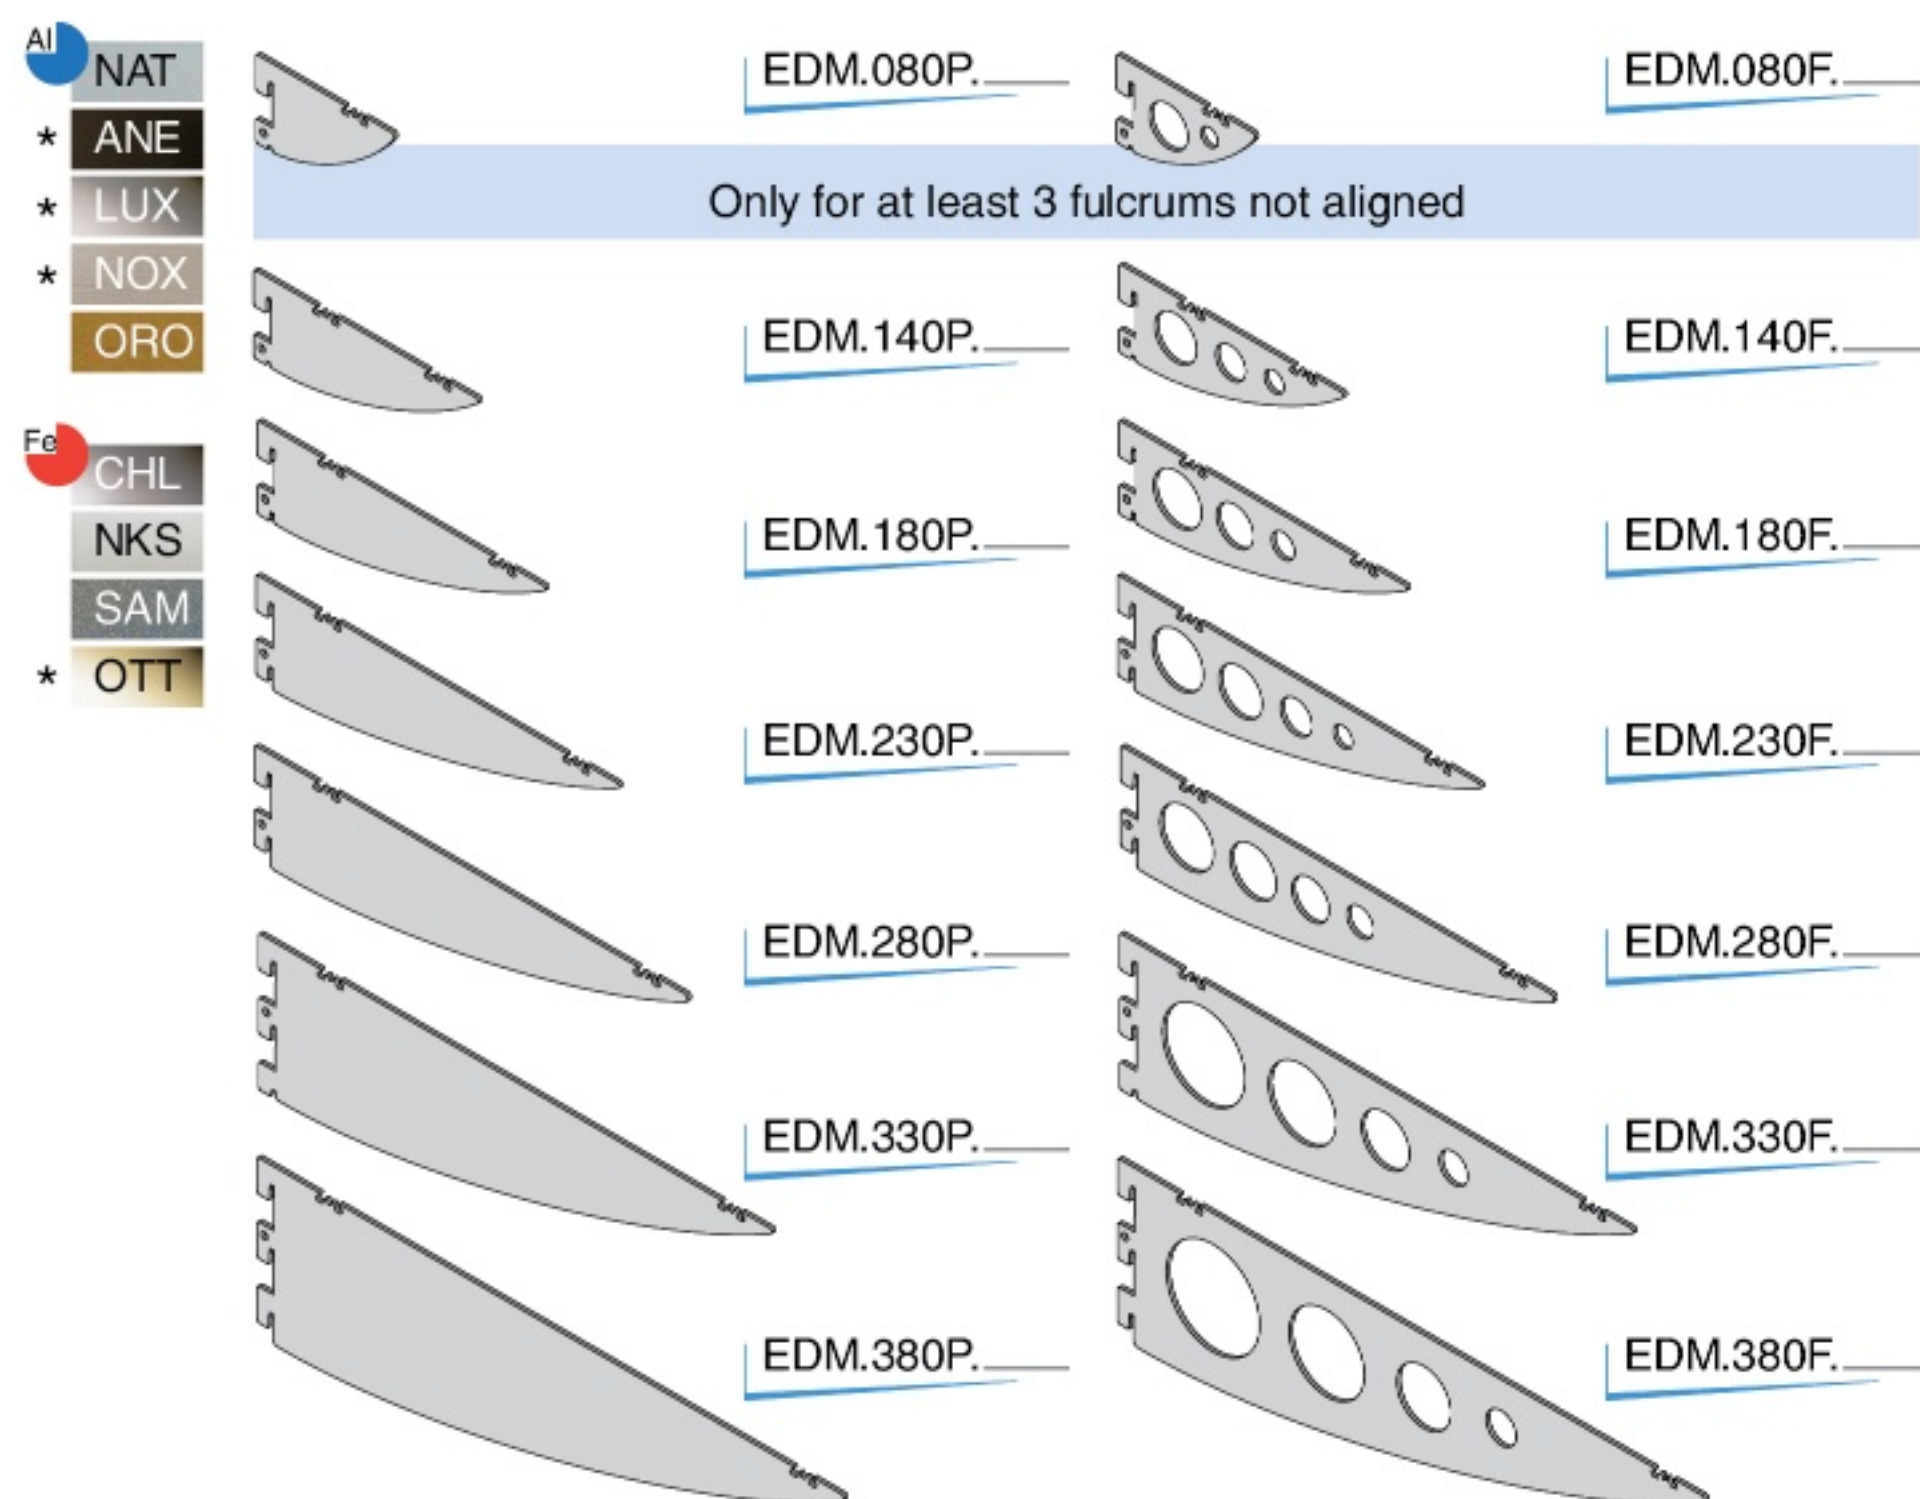


CTA series - from 150 to 400 mm

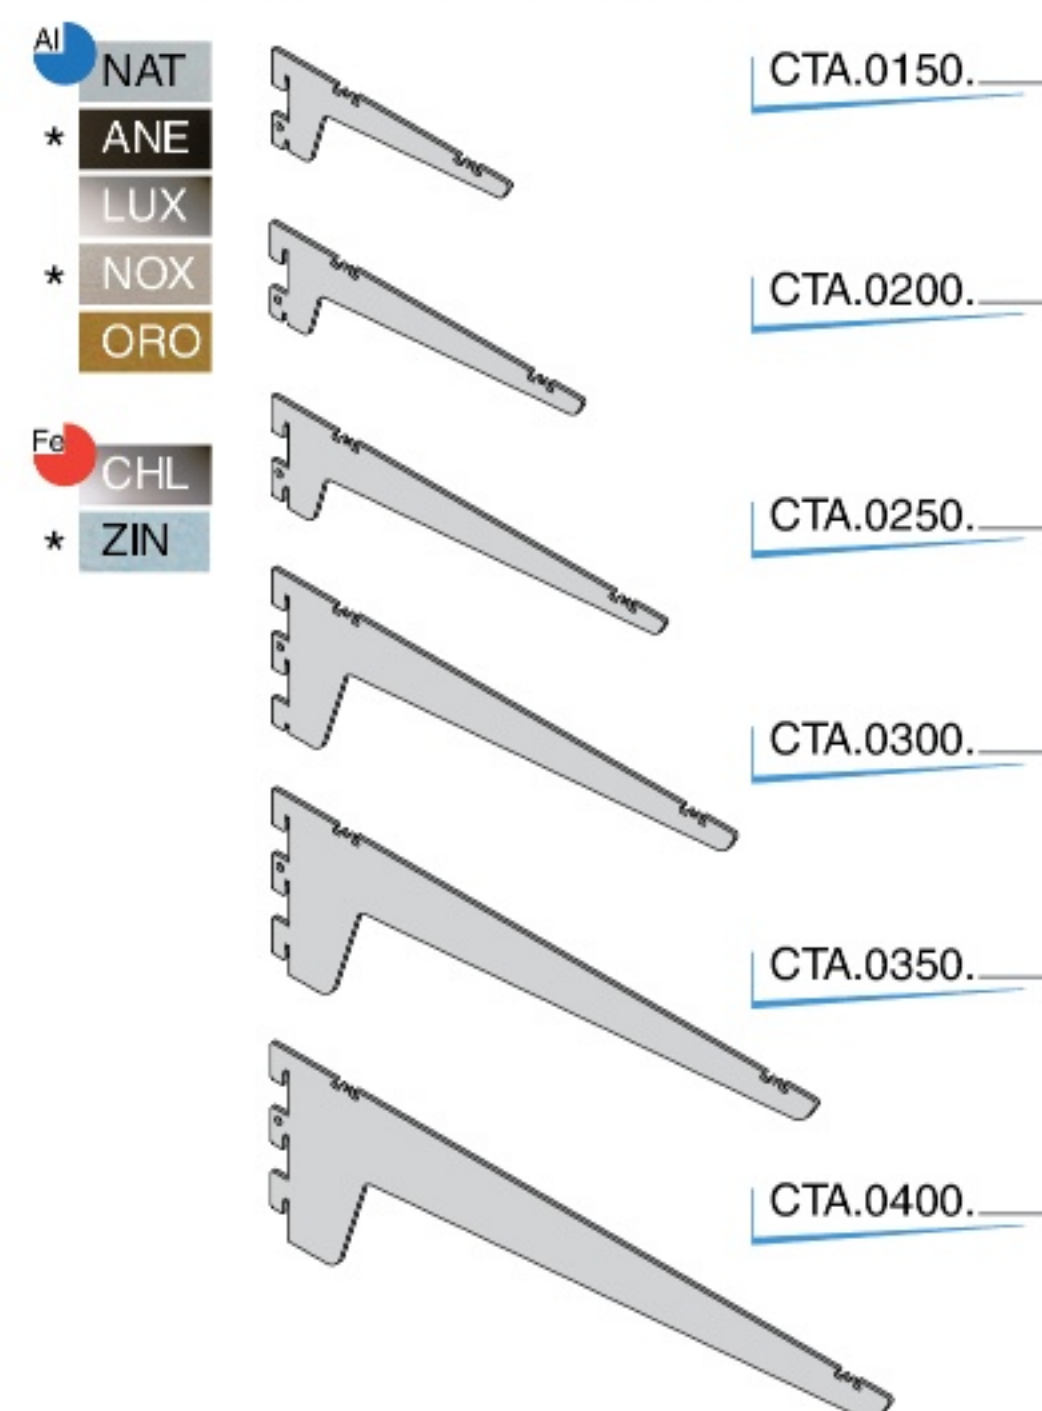

WMP series - 380 mm

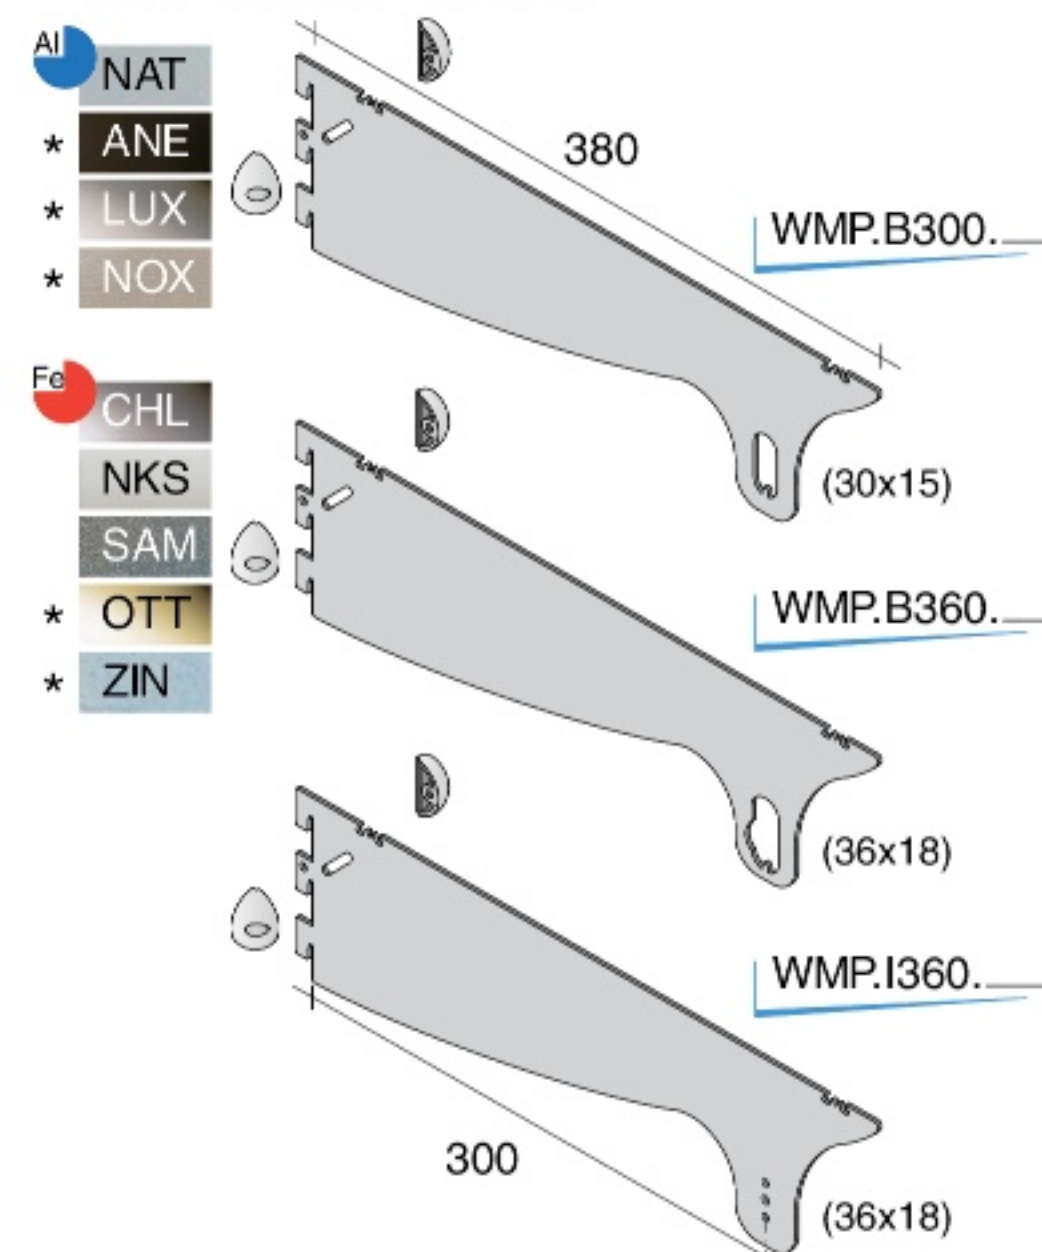

CMO series - from 170 to 550 mm

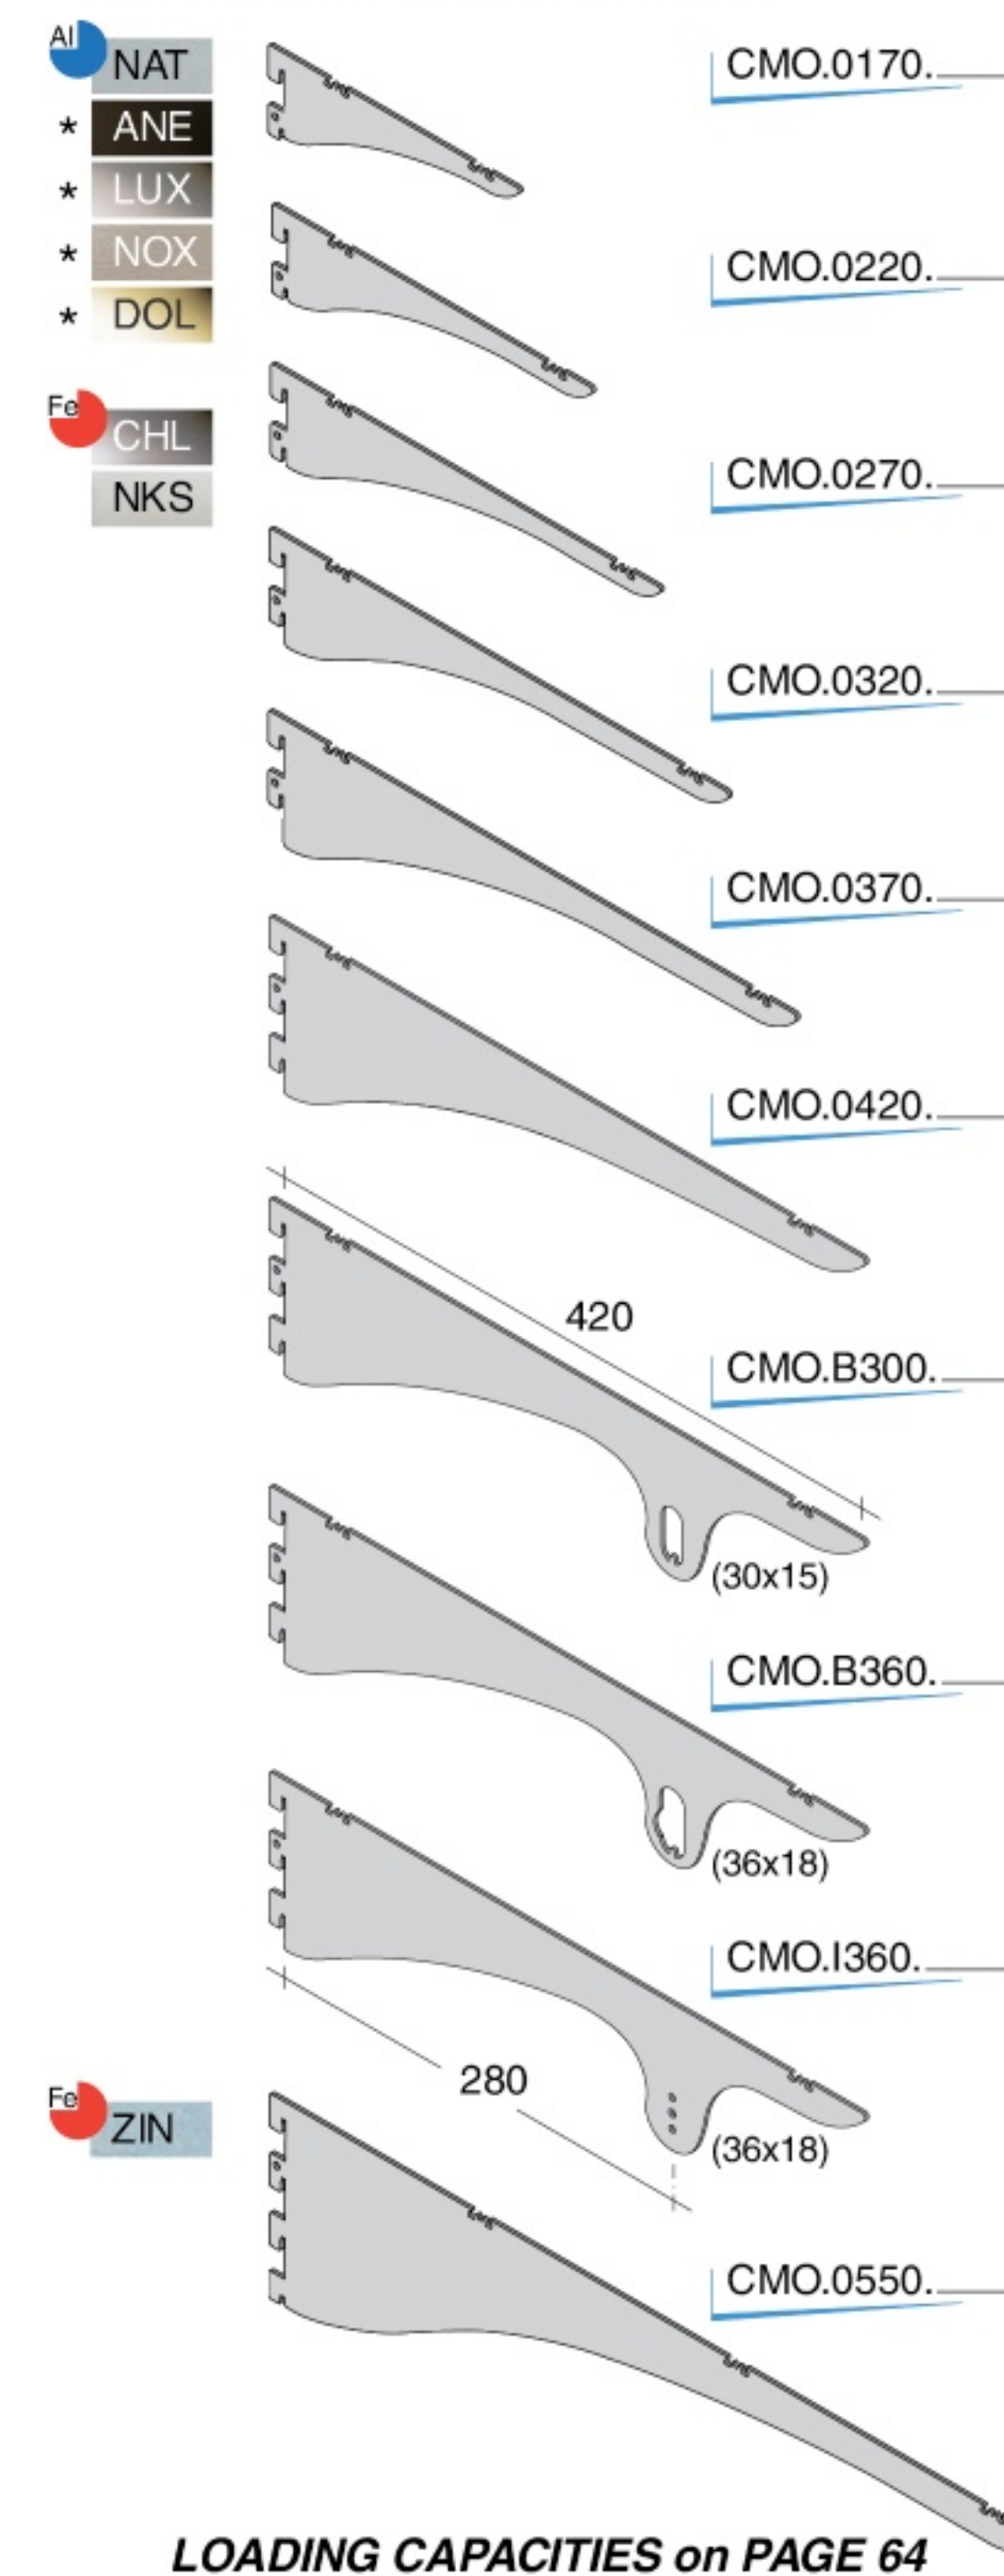

LOADING CAPACITIES on PAGE 64




Fixed and inclined wing-shaped supports

FIXED

DMN - 290 mm



- Al NAT
- * LUX
- * ORO
- Fe CHL
- NKS
- SAM
- * OTT

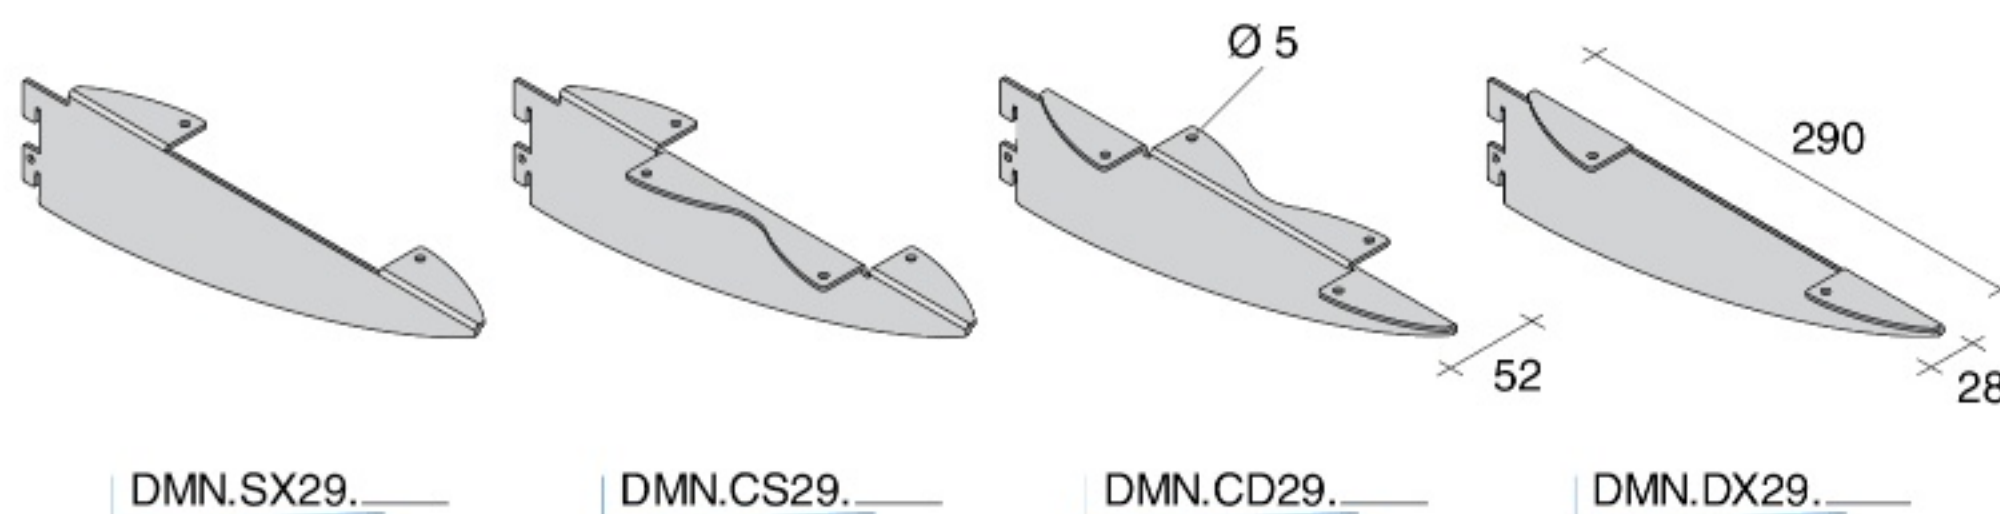

INCLINED FIXED

RCL


- Al NAT
- * ORO
- Fe CHL
- * SAM

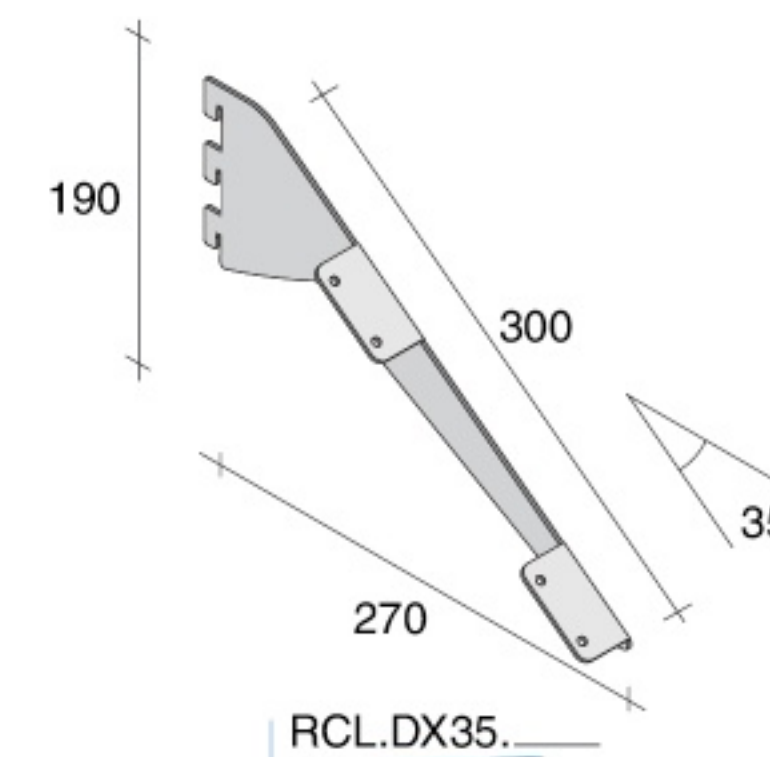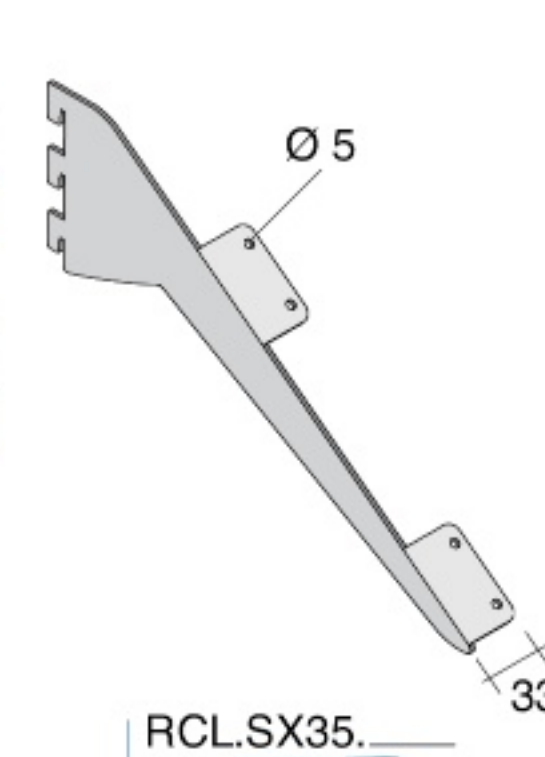



ADJUSTABLE INCLINED

DJA

- Al NAT
- * LUX
- * ORO
- Fe CHL
- NKS
- SAM
- * OTT

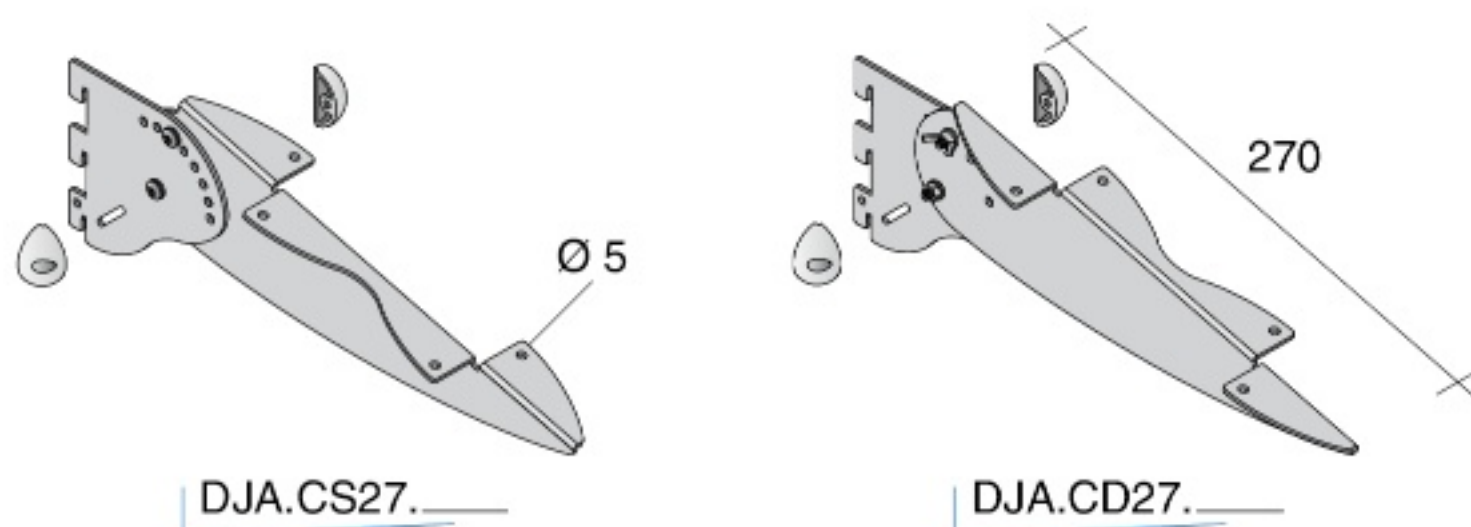

With adjustable
bracket in **18**
positions

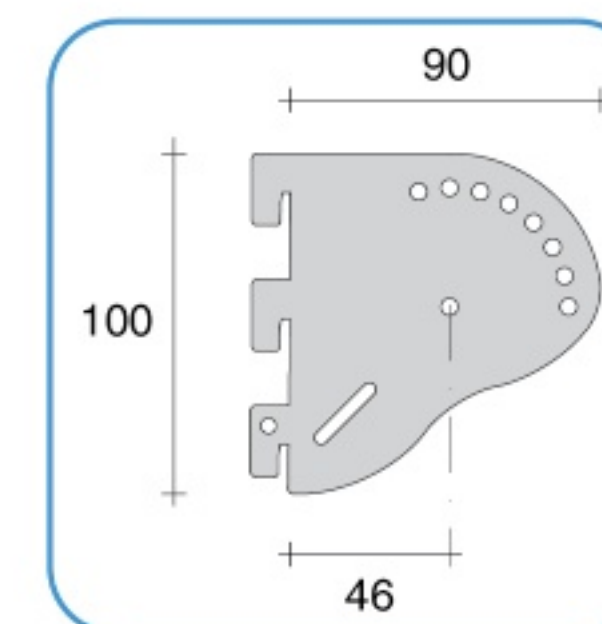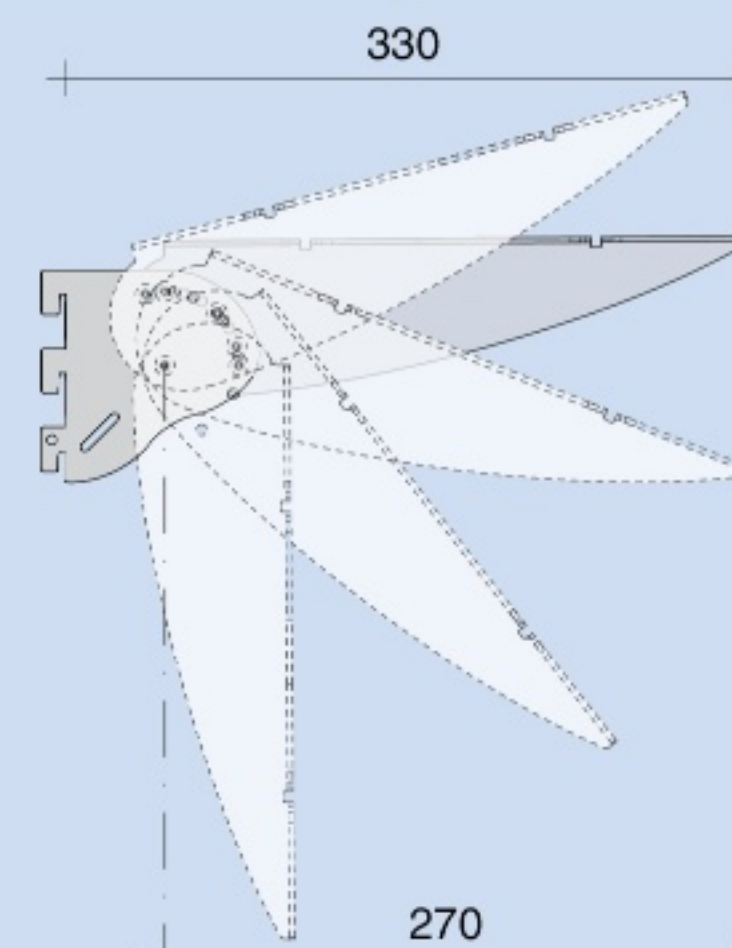

PFM

- Fe ZIN



PFT - specific for combination with OSA and OSW profiles, ref. page 56

- Fe ZIN





LOADING CAPACITIES on PAGE 66




Supports with saddles for shelves and hangrail

TO3 - TO2 series - 280 / 380 mm, rod 30 x 15 mm

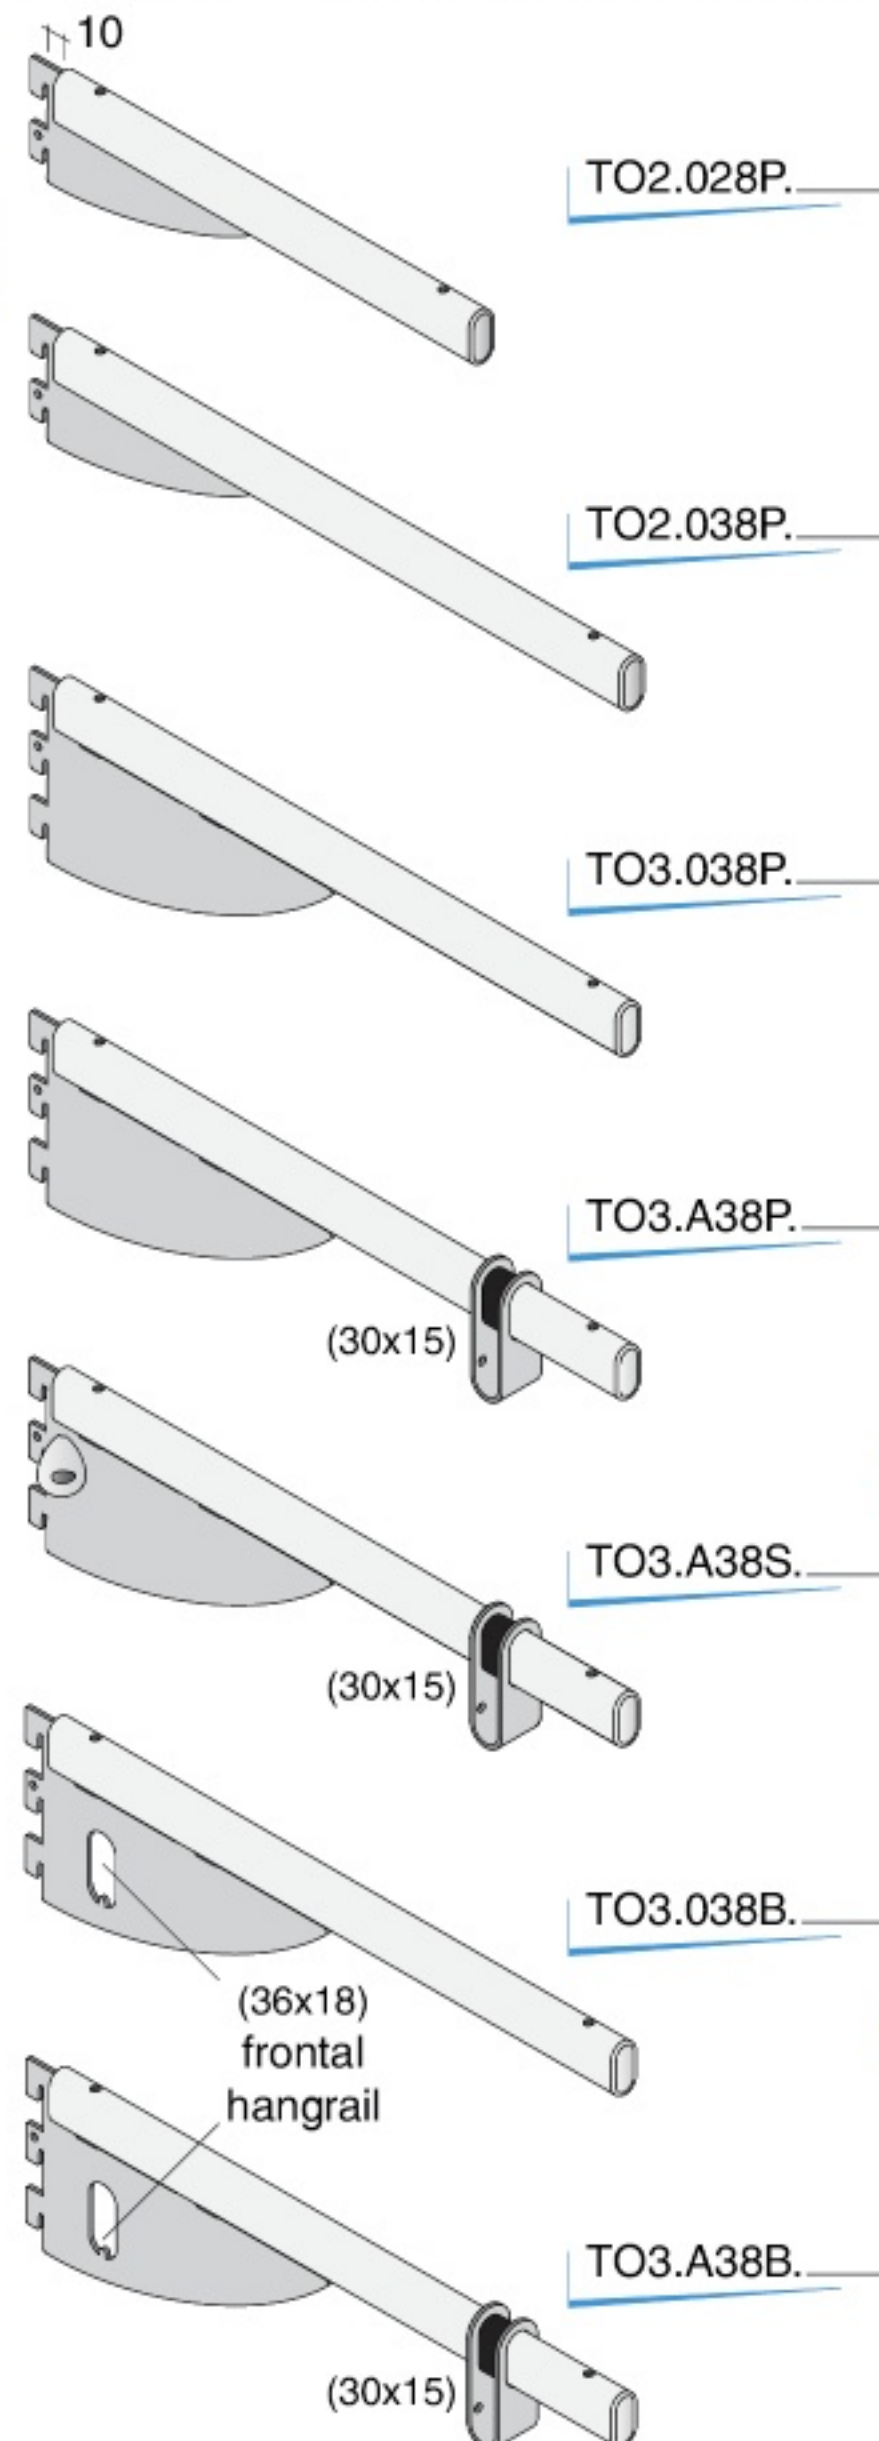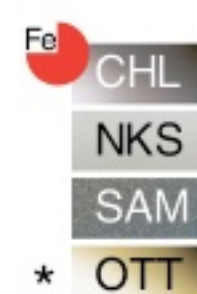



Saddle

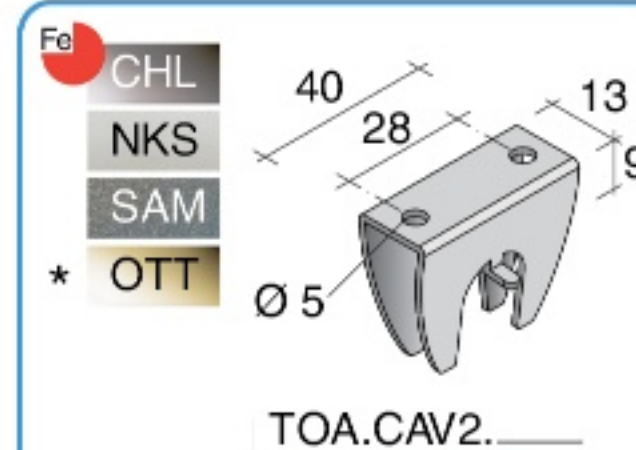

For supports
TO3 - TO2 - SO3 - TOH series.

DOUBLE USE:
top with hangrail
together
or separated,
frontal or lateral

SO3 series - 380 mm, rod 30 x 15 mm

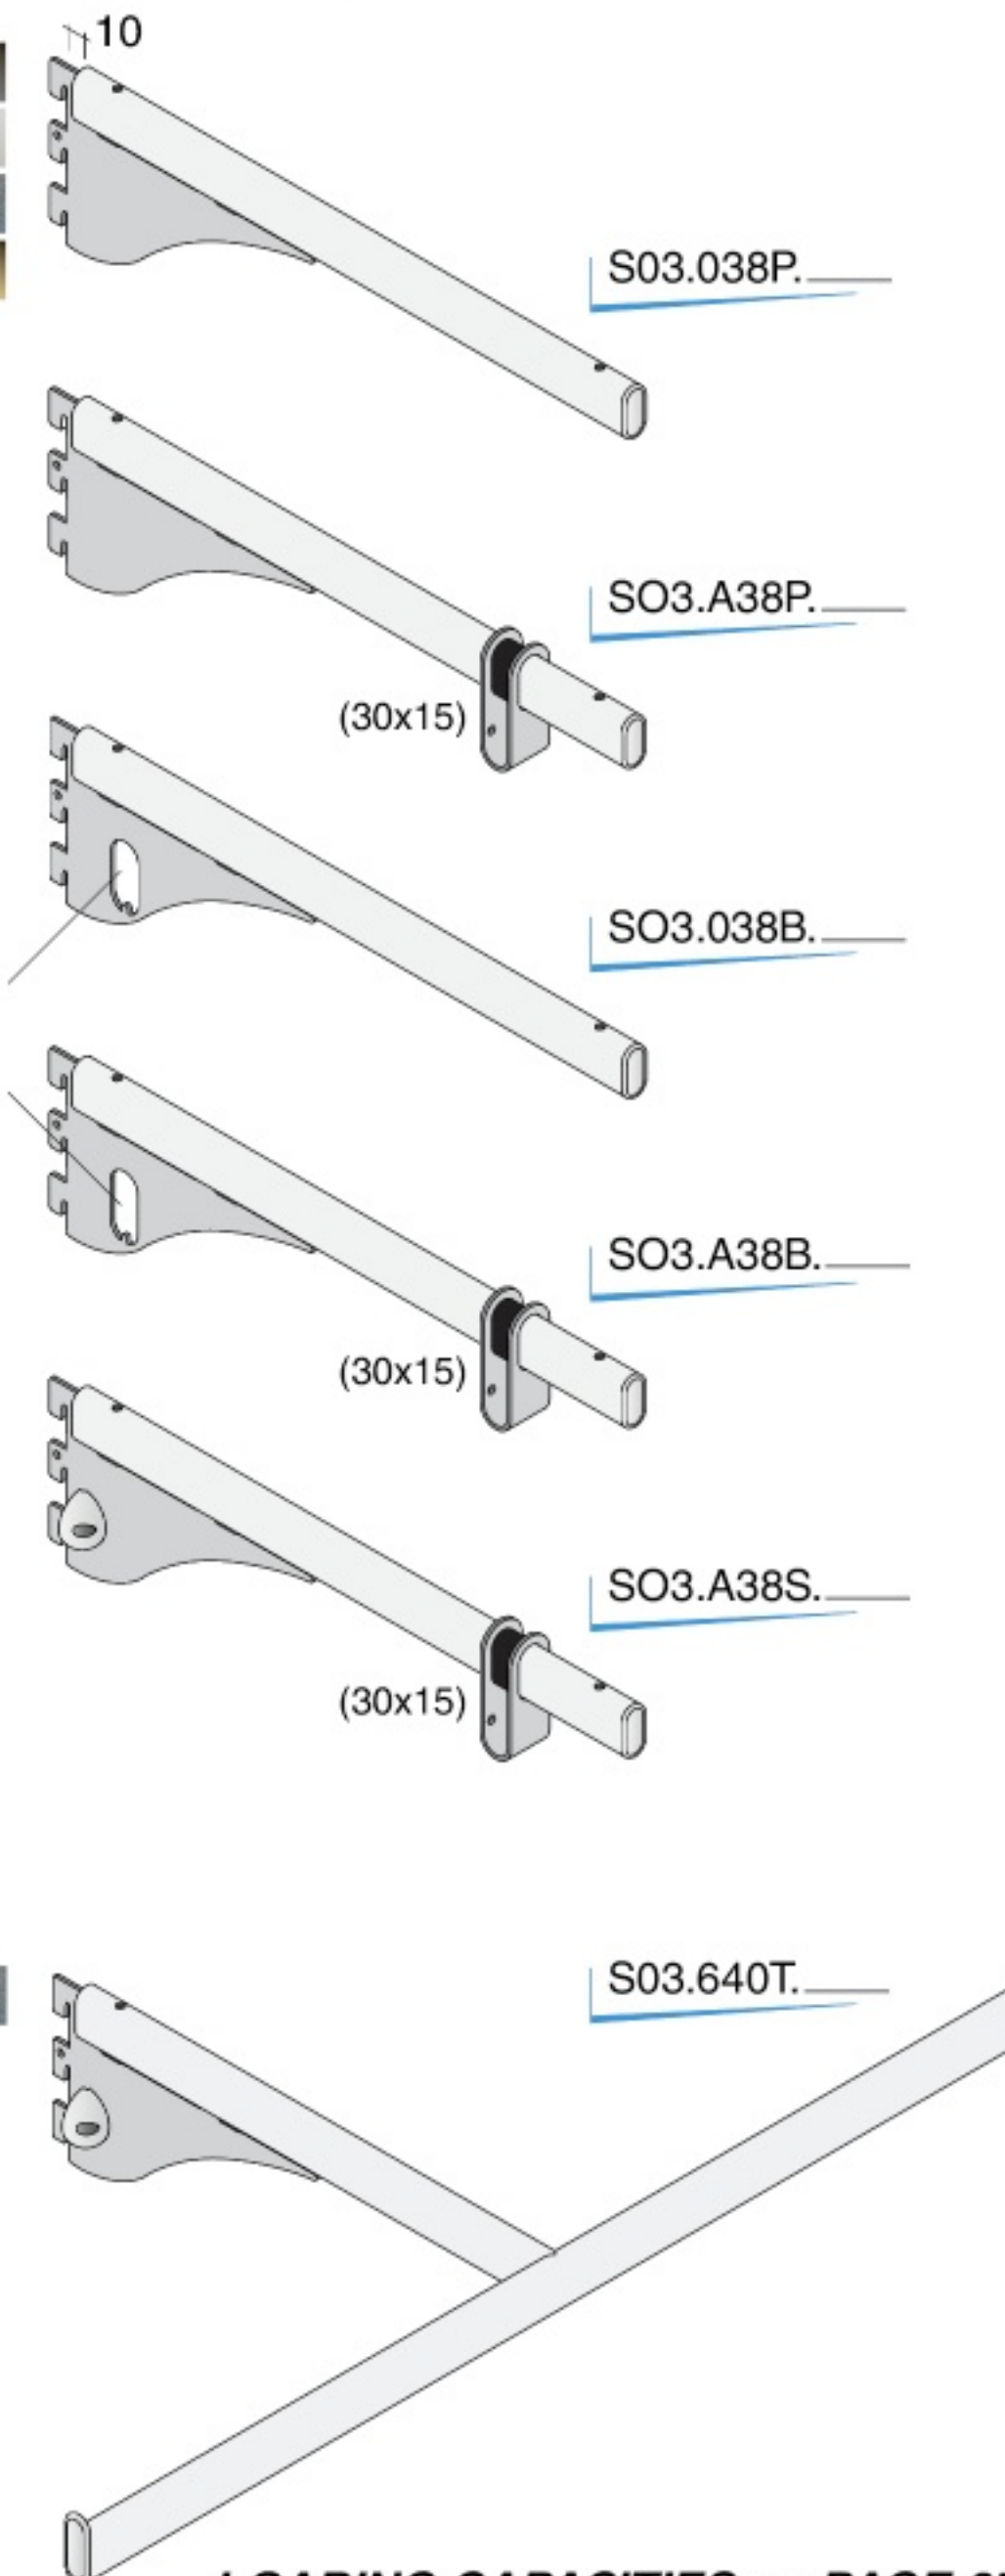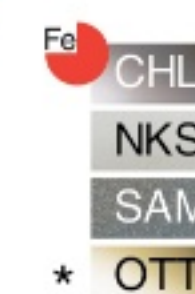


LOADING CAPACITIES on PAGE 65




Multi-function supports for frontal hangrail

TO3 - TO2 series - 280 / 380 mm, rod 30 x 15 mm

Fe
CHL
NKS
SAM

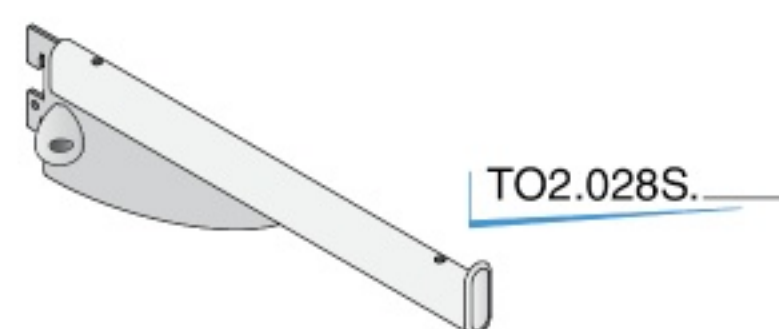

TO2.028S.

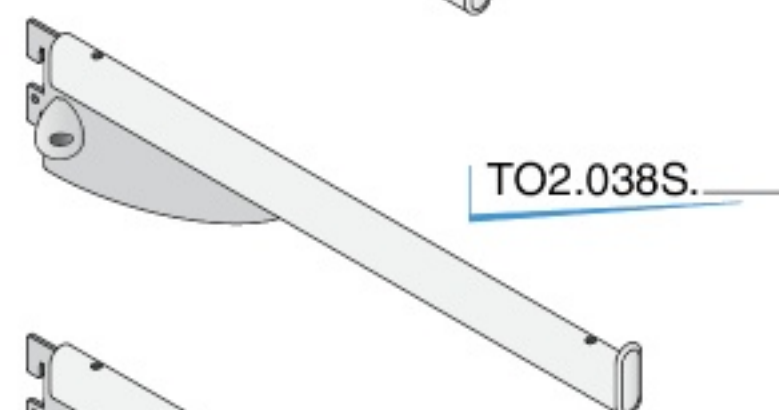


TO2.038S.




TO3.038S.

SO3 series - 380 mm, rod 30 x 15 mm

Fe
CHL
NKS
SAM

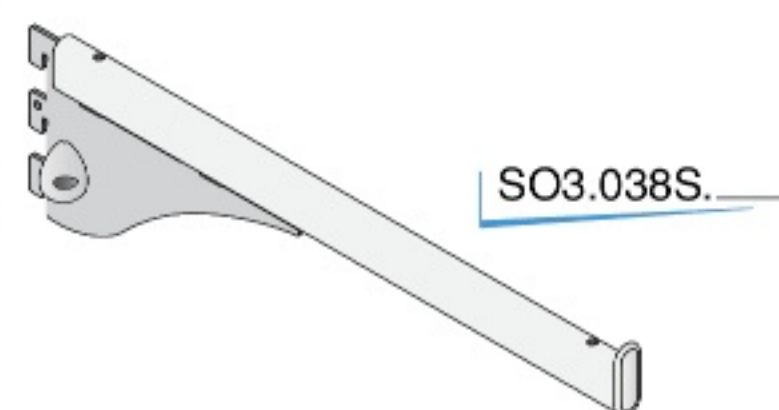


SO3.038S.

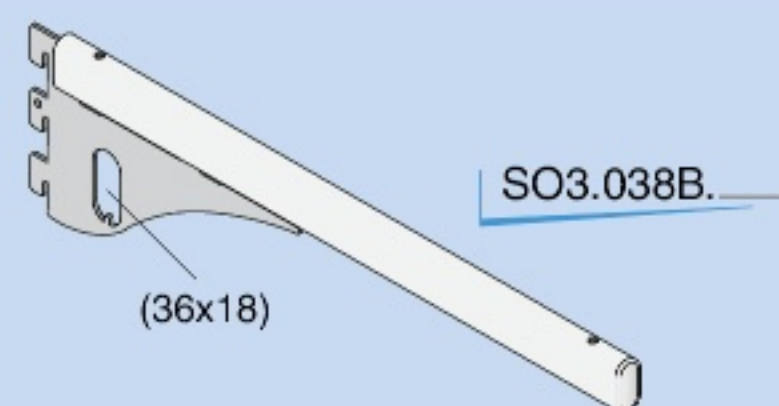


SO3.038B.

(36x18)

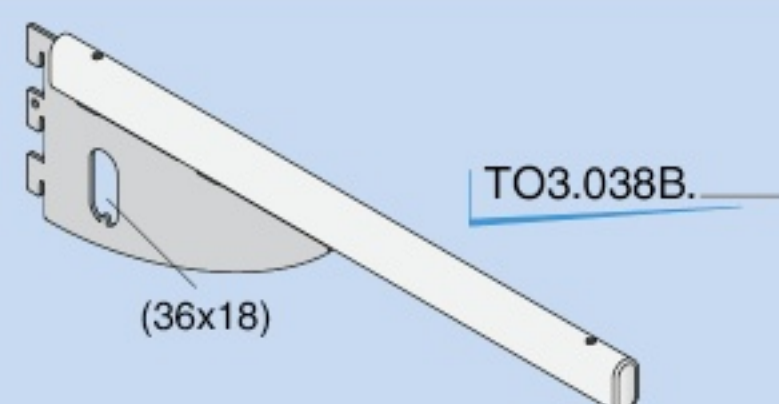

TO3.038B.

(36x18)

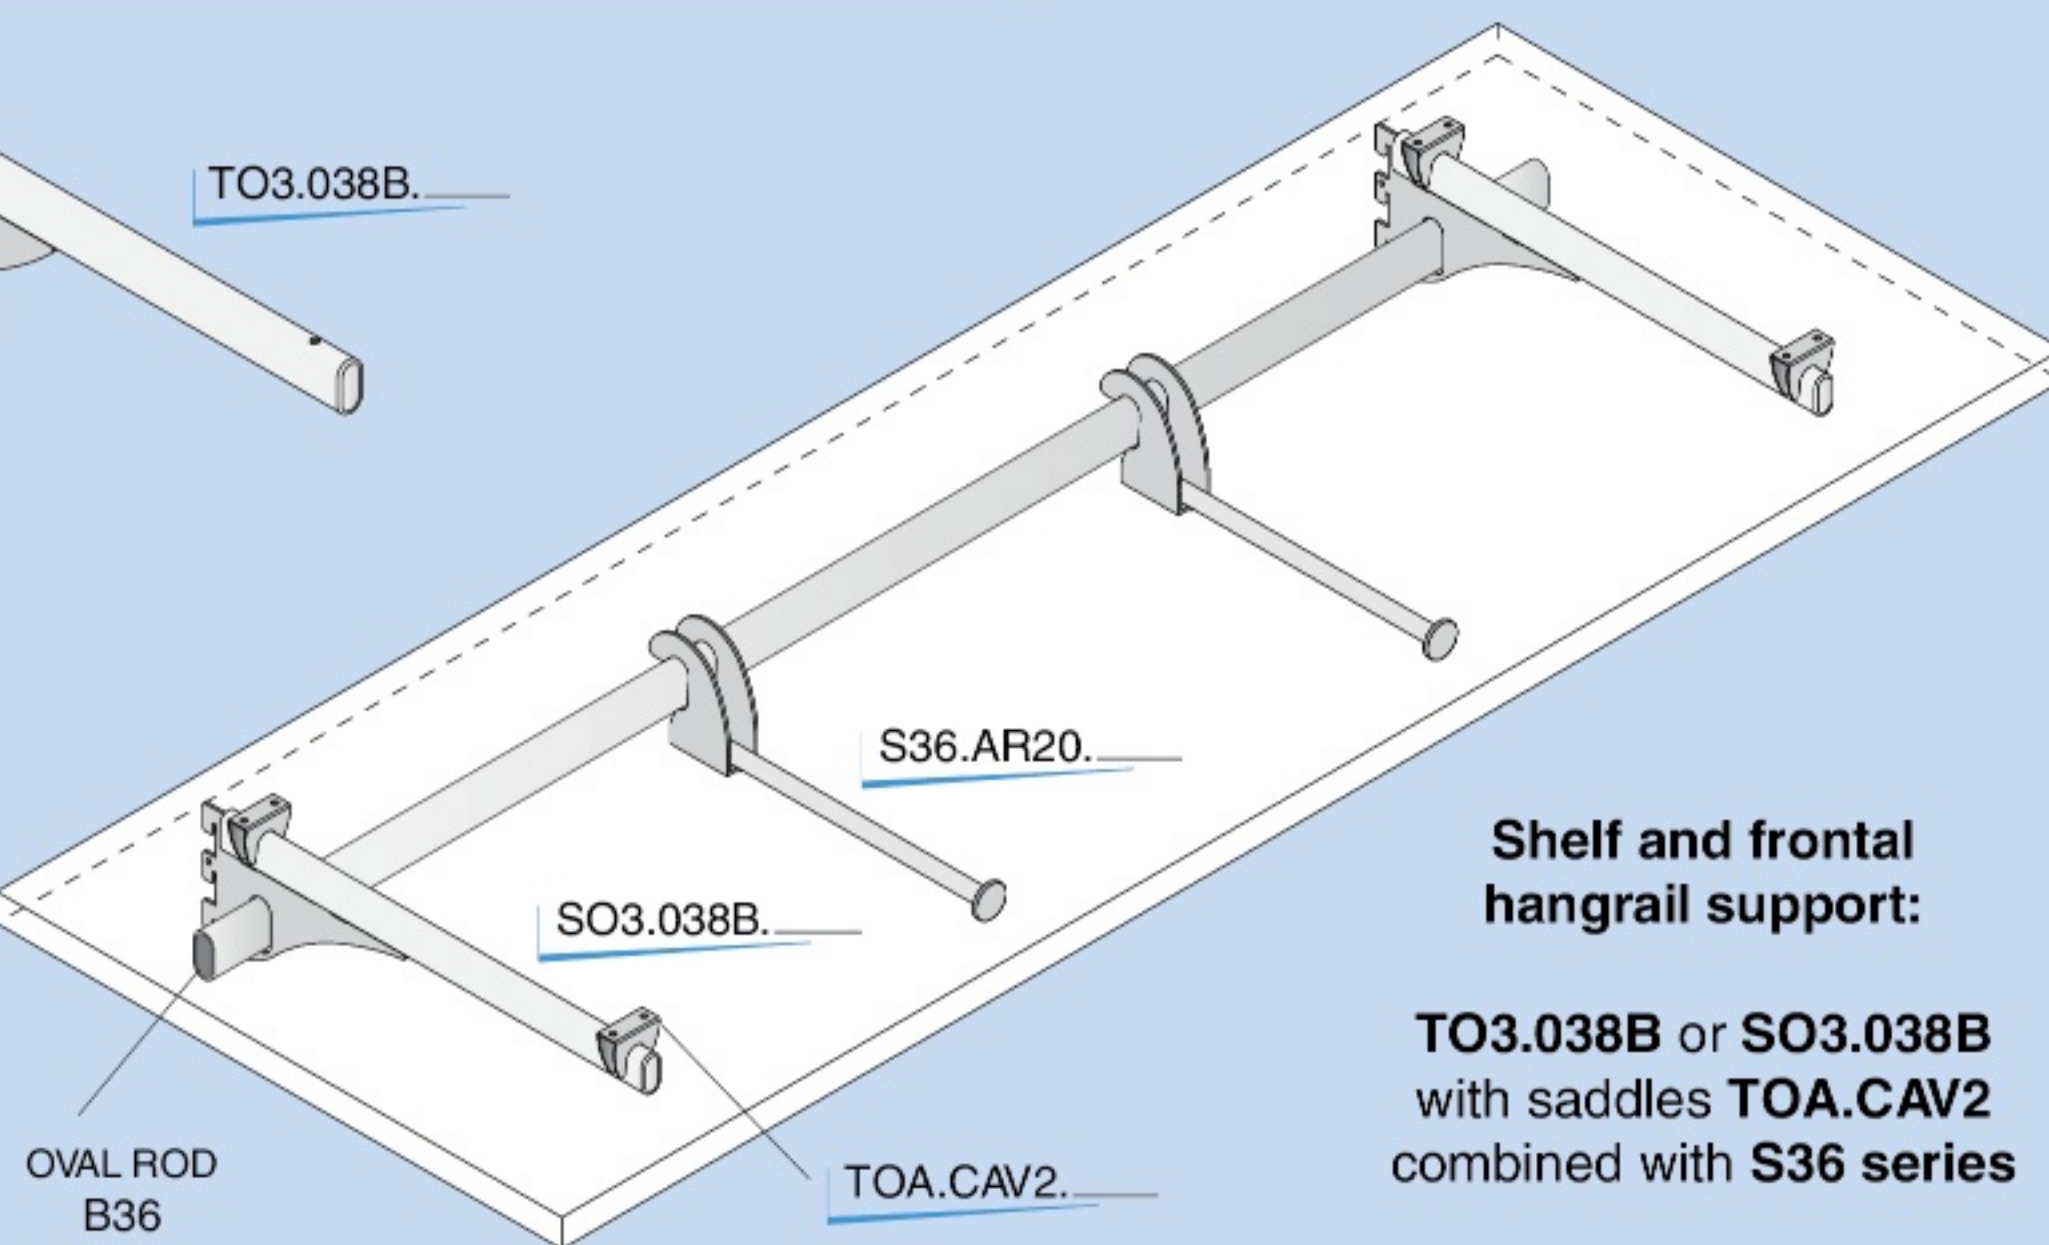

**Shelf and frontal
hangrail support:**

**TO3.038B or SO3.038B
with saddles TOA.CAV2
combined with S36 series**

OVAL ROD
B36
36 x 18


S36.AR20.

SO3.038B.

TOA.CAV2.

SO2 - inclined clothes hanger rail - rod 30 x 15 mm

Fe
CHL
NKS
SAM

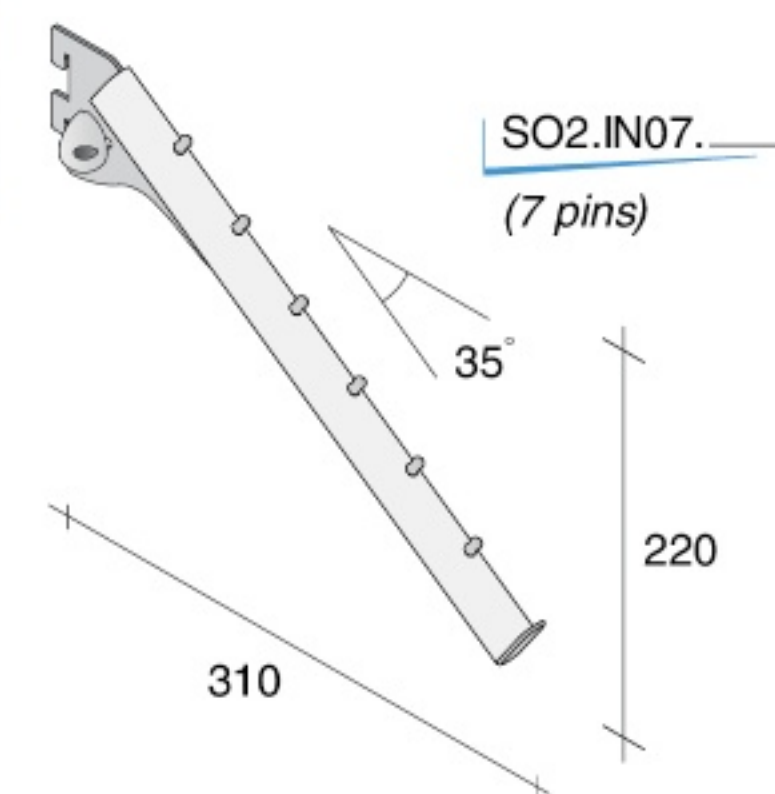

SO2.IN07.

(7 pins)


35°

220

310

IND series - notch sloping supports for clothes hanger

Fe
CHL
NKS
SAM
* OTT
* ZIN

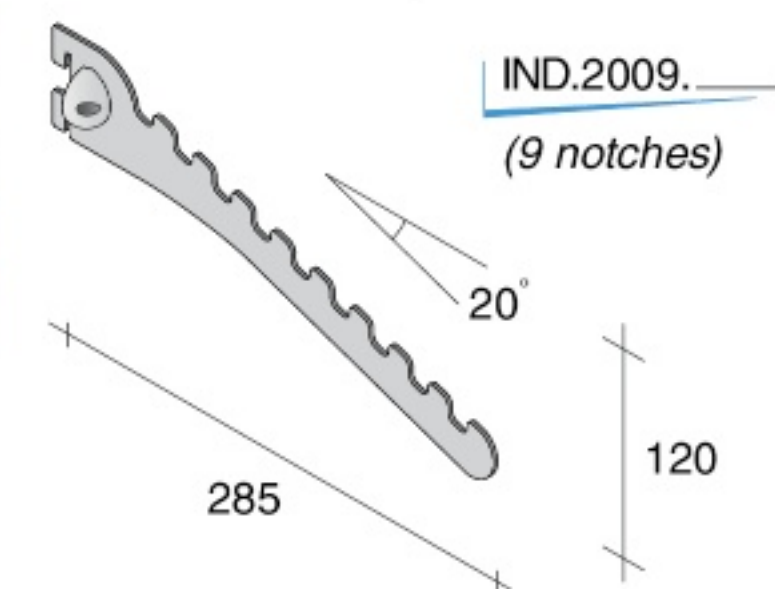


IND.2009.

(9 notches)

20°

120

285

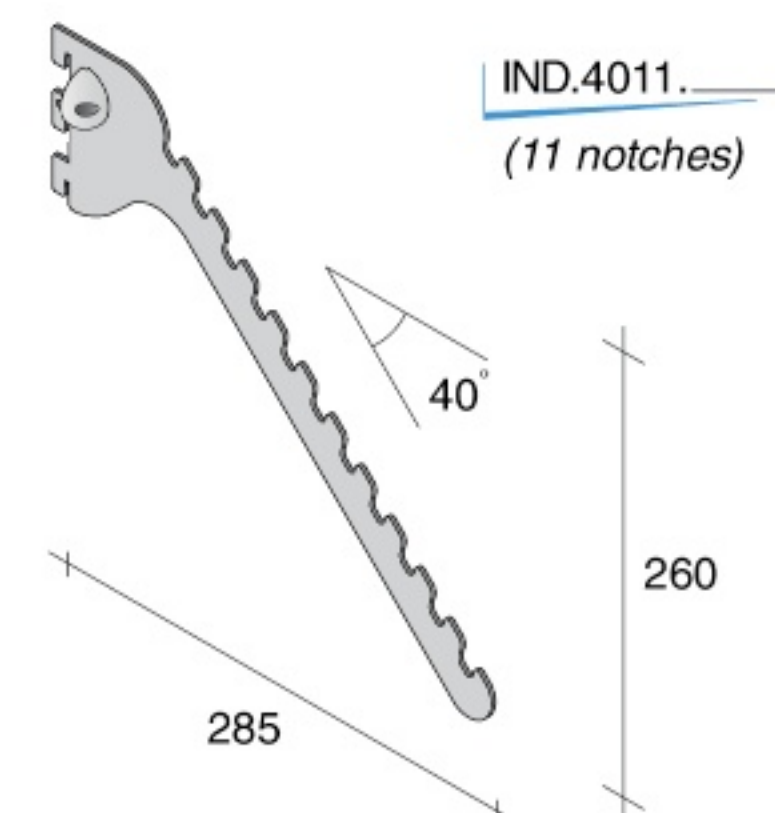

IND.4011.

(11 notches)

40°



260

285


LOADING CAPACITIES on PAGES 65-66




S36 series - removable display rails for hanging onto B36 steel rod (oval, 36 x 18 mm)

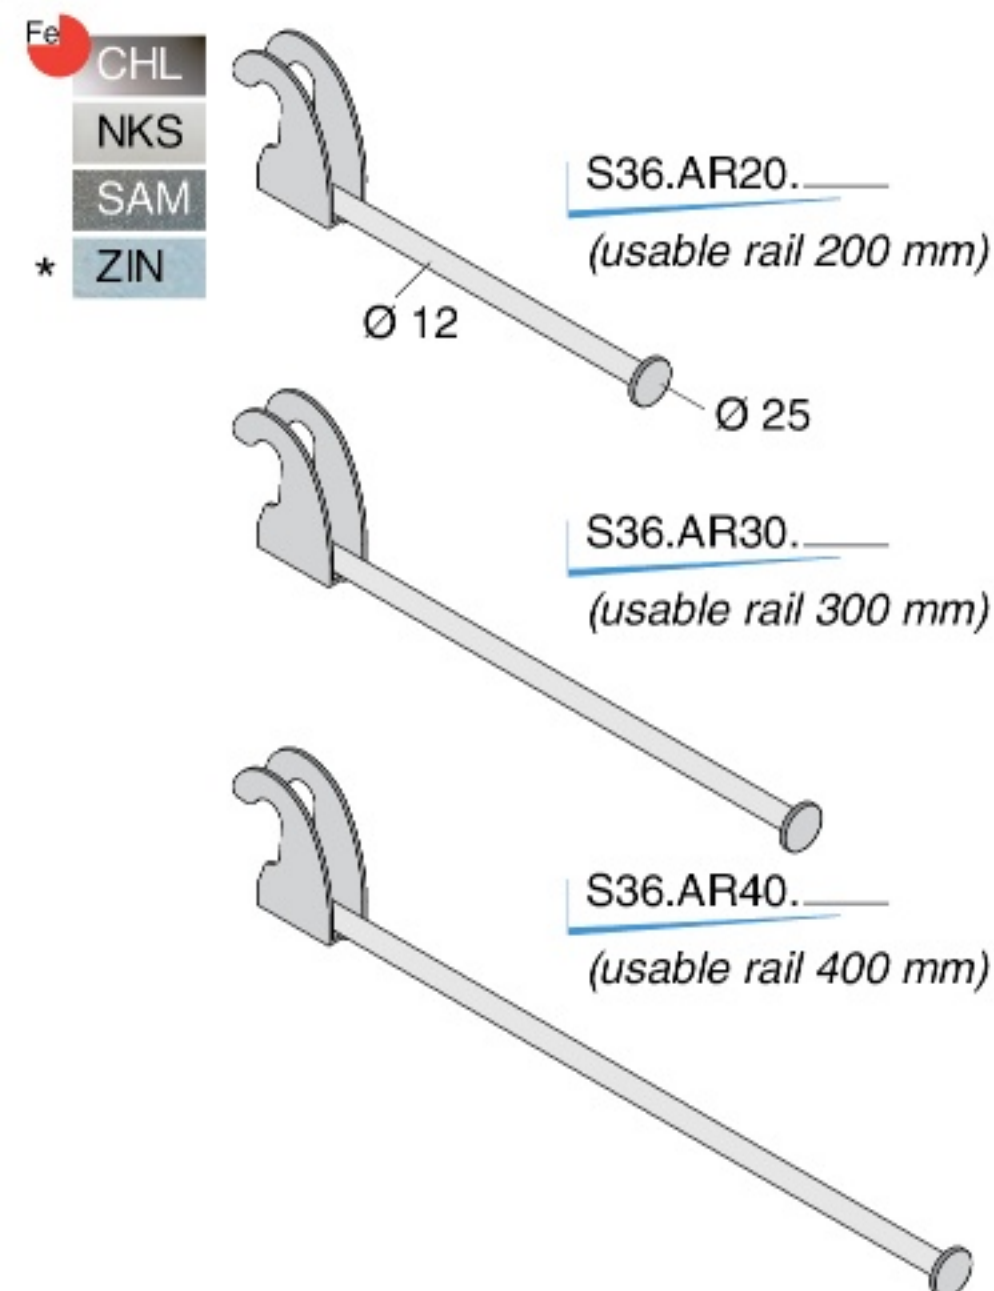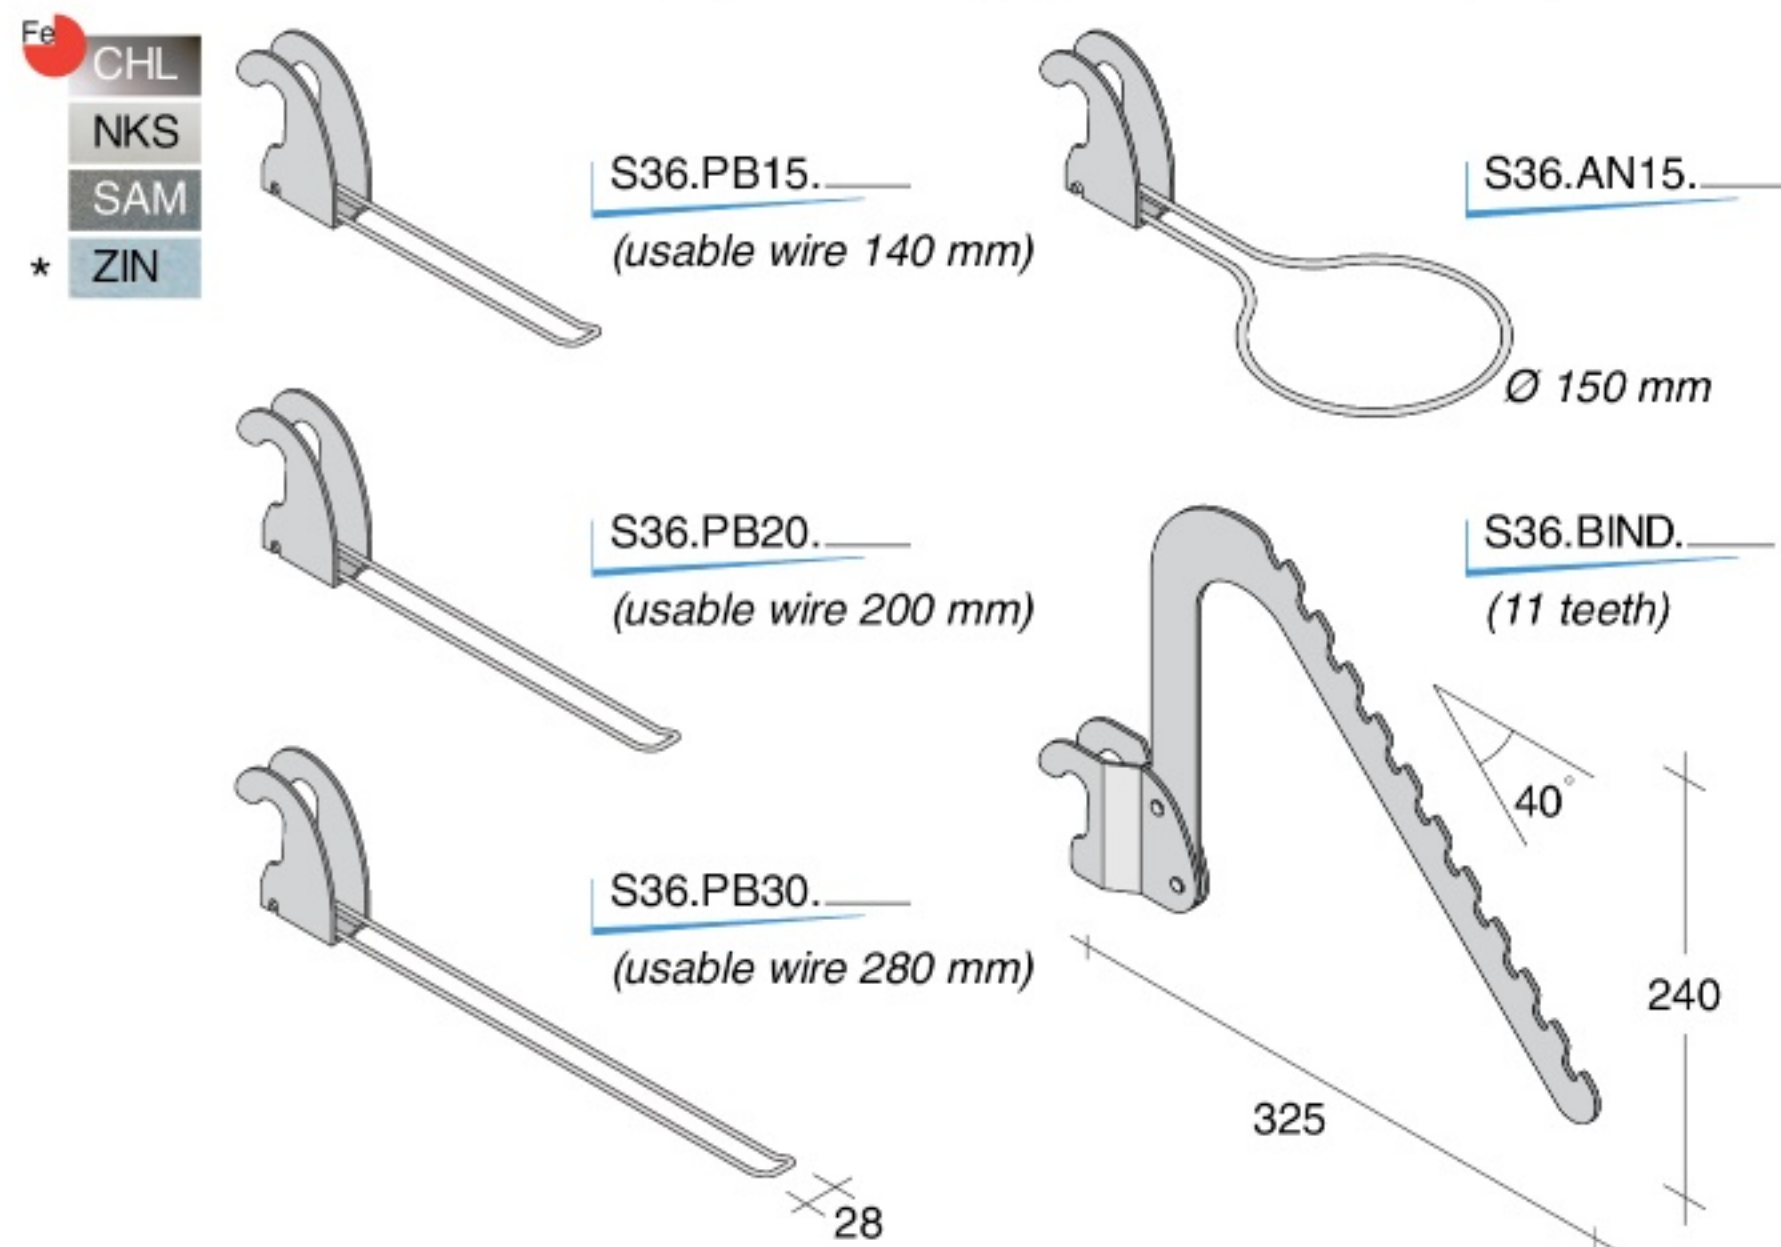

APA series - for B36 passing hangrail rod

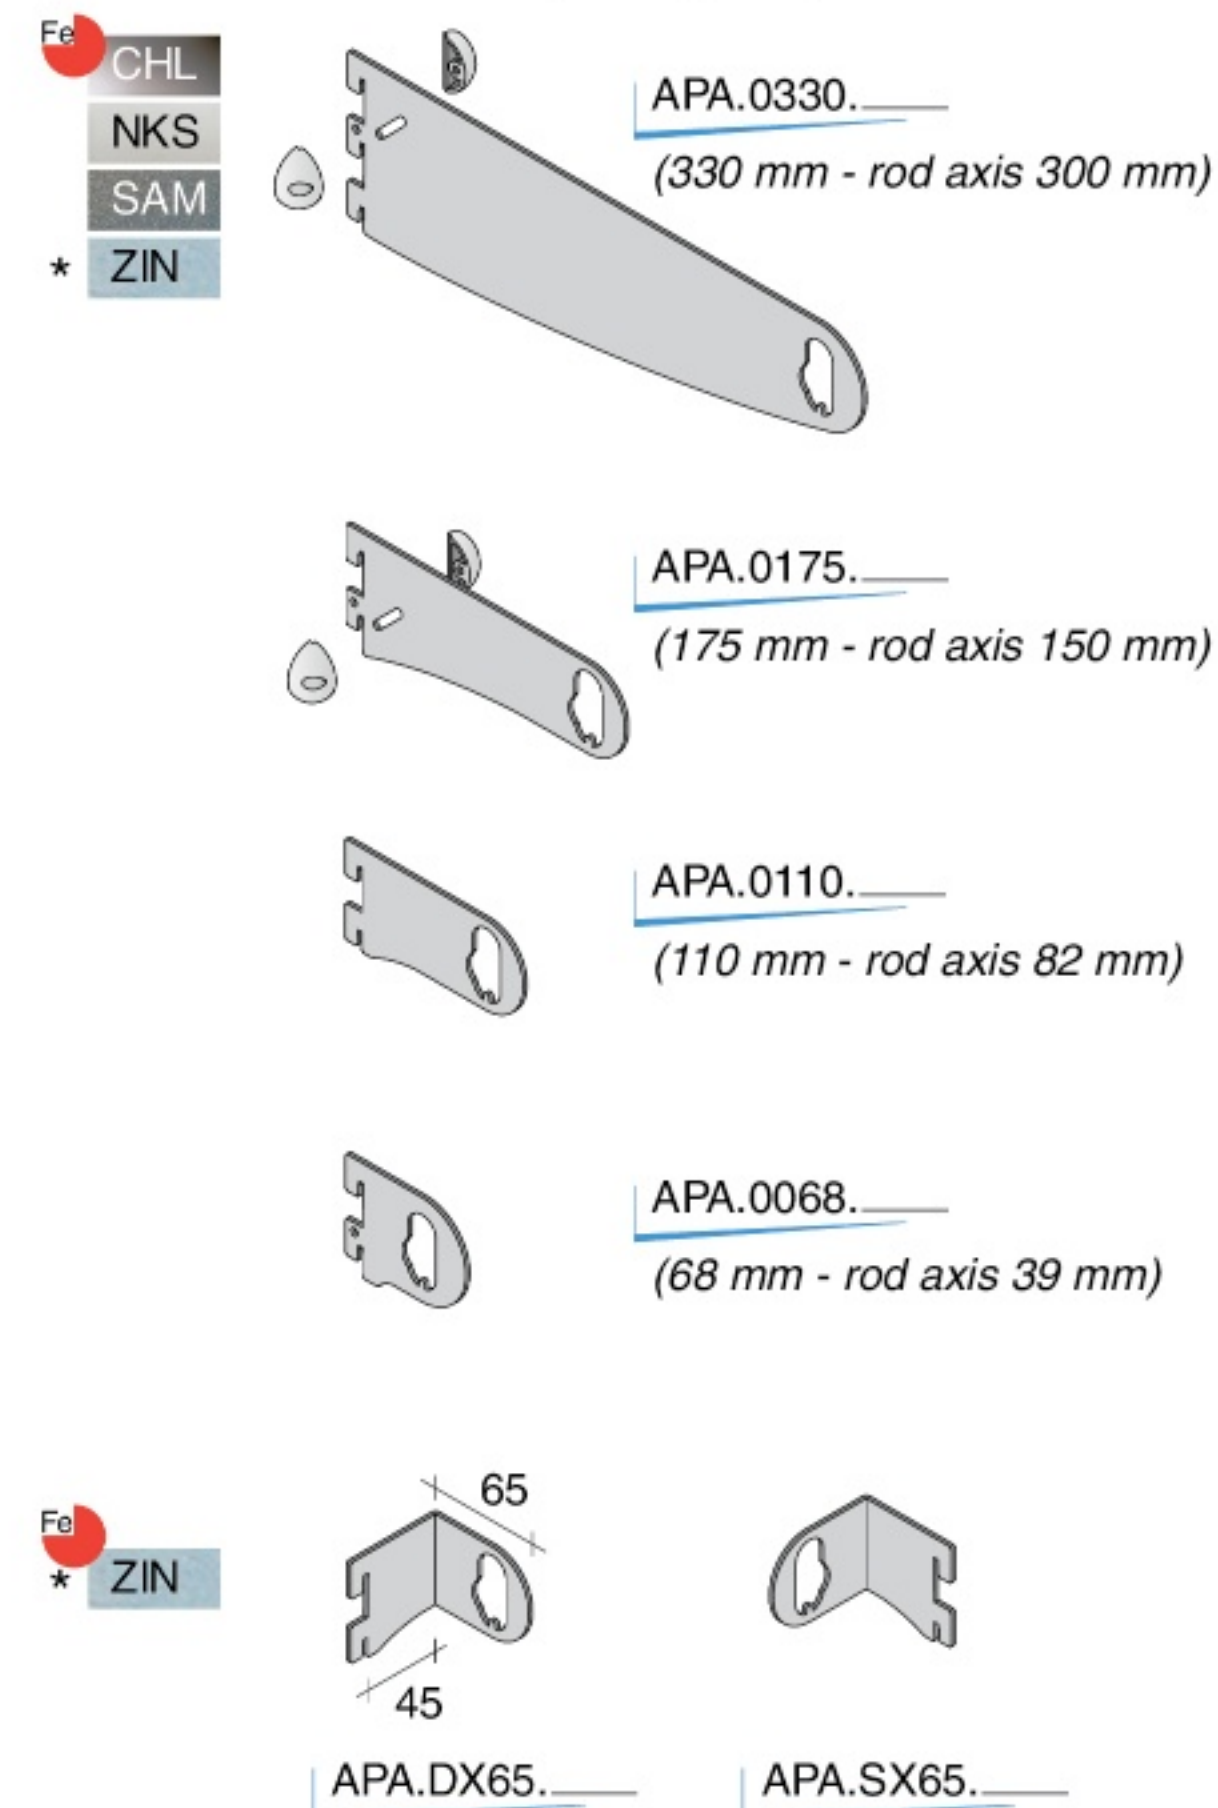

NOT for this application

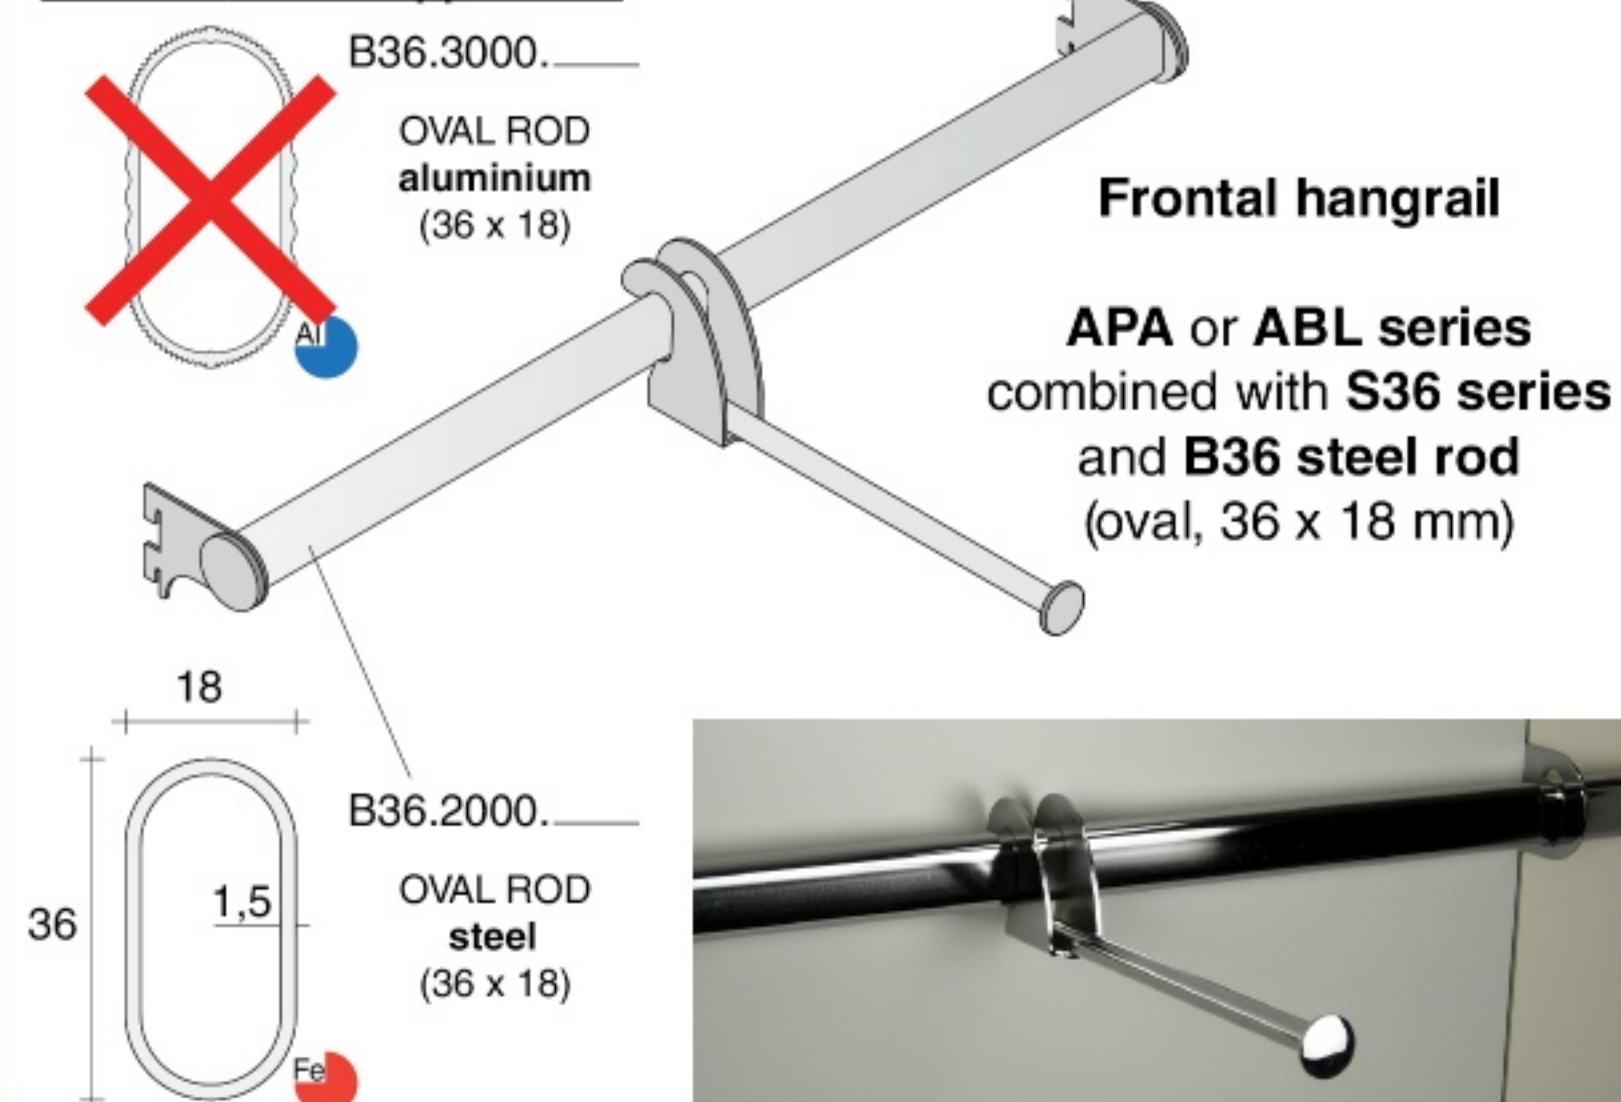

LOADING CAPACITIES on PAGE 66



Supports for hangrail (without shelves)

NB7 DX

ABL series - for B36 blocked hangrail rod

Al NAT

* ORO

Fe CHL

NKS

SAM

* ZIN

ABL.0315.____
(315 mm - rod axis 295 mm)

ABL.0076.____
(76 mm - rod axis 55 mm)

Version on request
DX (right) and SX (left)
for flush countersunk-head screw

ABL.D315.____

ABL.S315.____

ABL.DX76.____

ABL.SX76.____

Finishing disk

Fe CHL

NKS

* OTT

SAM

* ZIN

ABL.DISC.____

Concealed blocking

ABL.INCA.ZIN

Screw for lateral elements

Fe CHL

OTT

ZIN

ABL.VITE.____
(button-head screw)

ABL.VITS.ZIN
(countersunk-head screw)

Threaded connection for central elements

MZF.5X50.ZIN

NB1

NB2

NB7 SX

MZF.5X50.ZIN

threaded connection

ABL.DISC.____

ABL.INCA.ZIN

ABL.INCA.ZIN

ABL.INCA.ZIN

ABL.VITE.____

ABL.INCA.ZIN

ABL.INCA.ZIN

ABL.VITS.ZIN
countersunk-head screw

See also B36
oval rod mounting,
in the RODS AND
ACCESSORIES
section, page 87

LOADING CAPACITIES on PAGE 66



Specific supports for glass shelves

SUPPORTS WITH RST BLOCKING ACCESSORY





Z series

for 5 - 10 mm glass shelves



Al NAT
* LUX
ORO

Fe CHL
NKS
SAM
* OTT

COMPRISING: RST + EDM support
+ 2x CAV.APCN.TRA + 4x VEN.GLA5.TRA

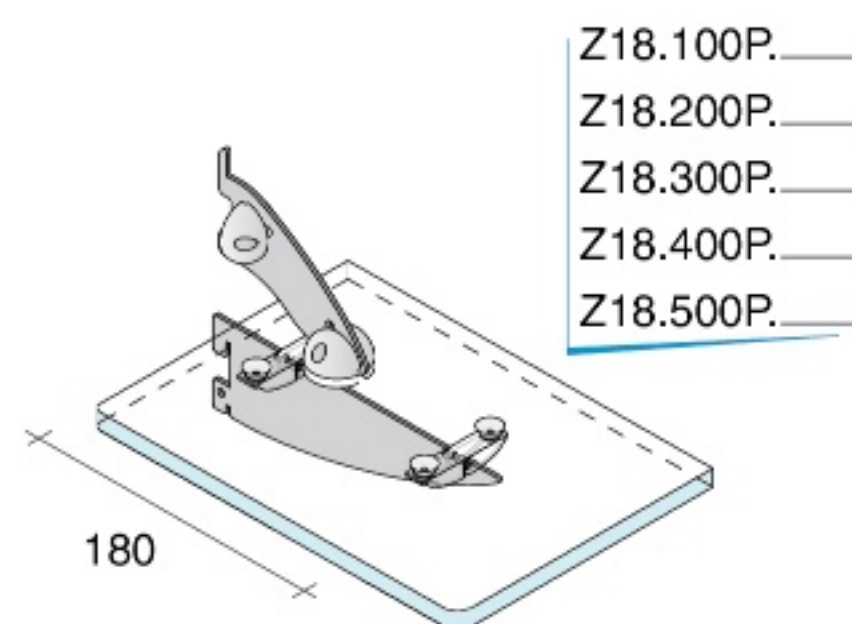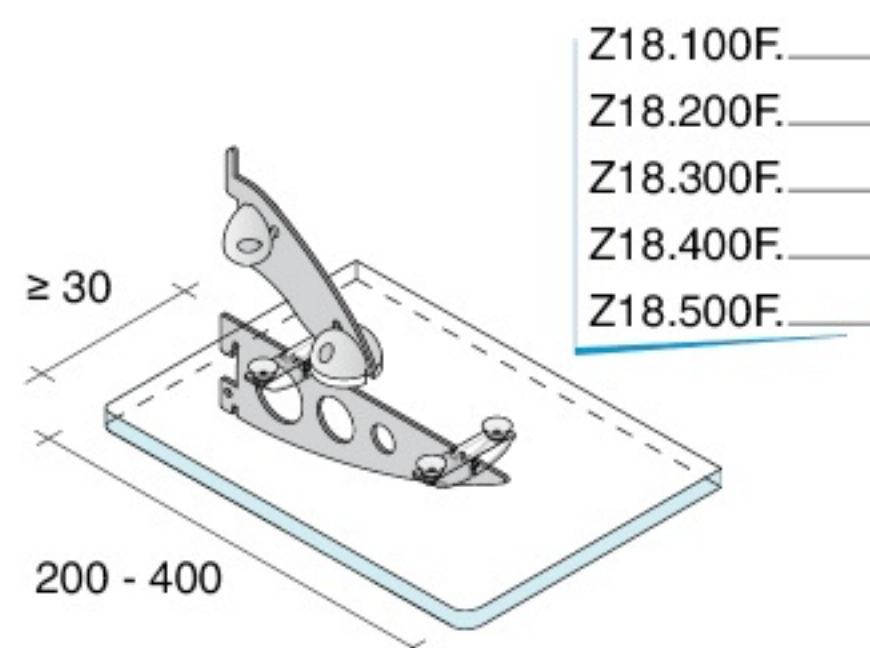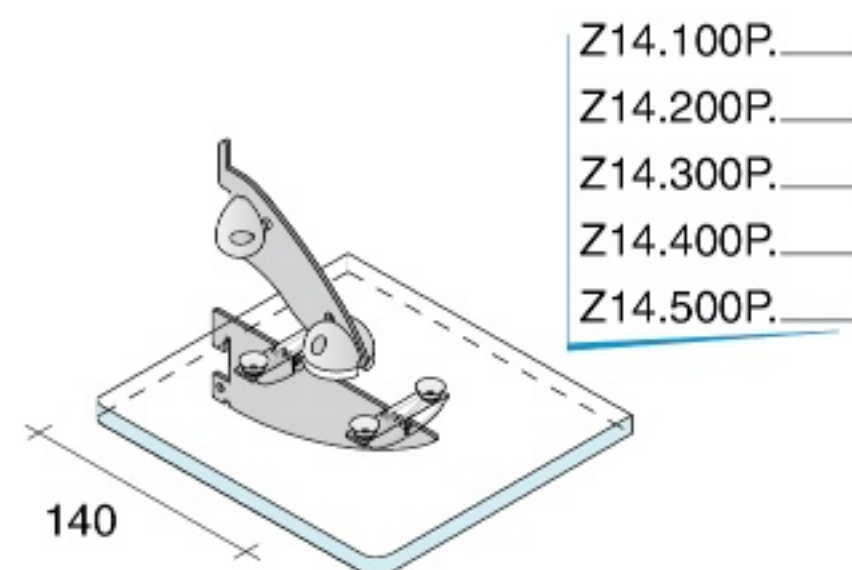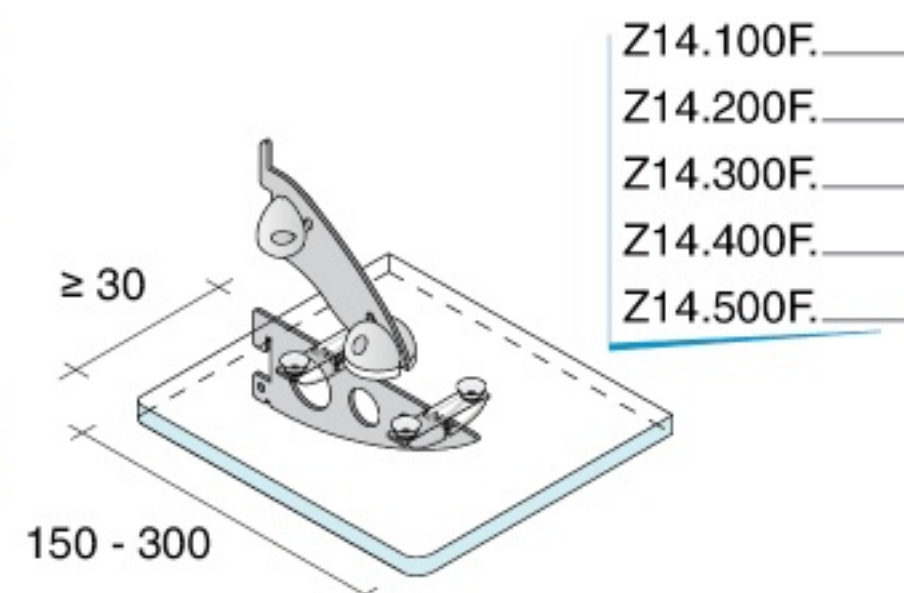

Side overhang
assembly at
least 30 mm

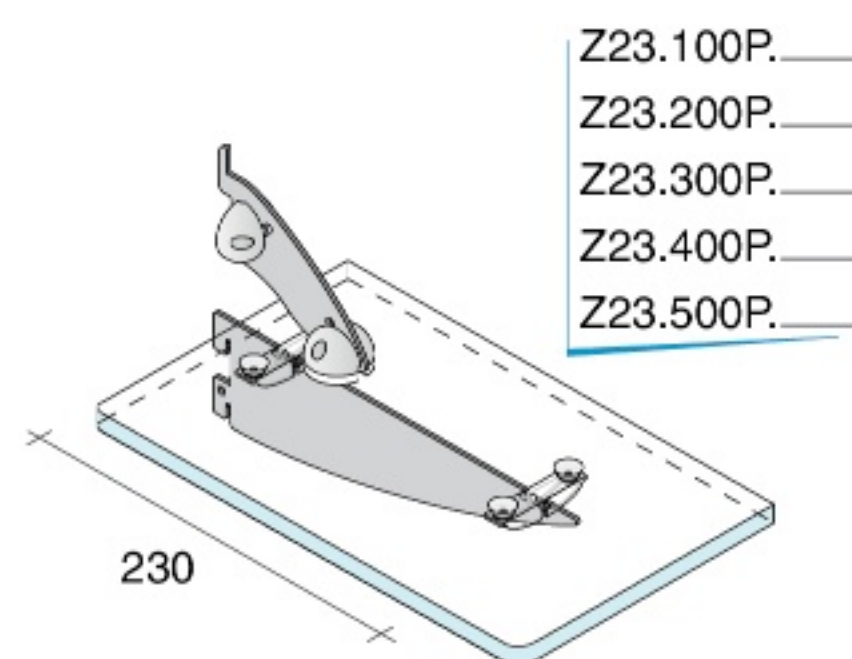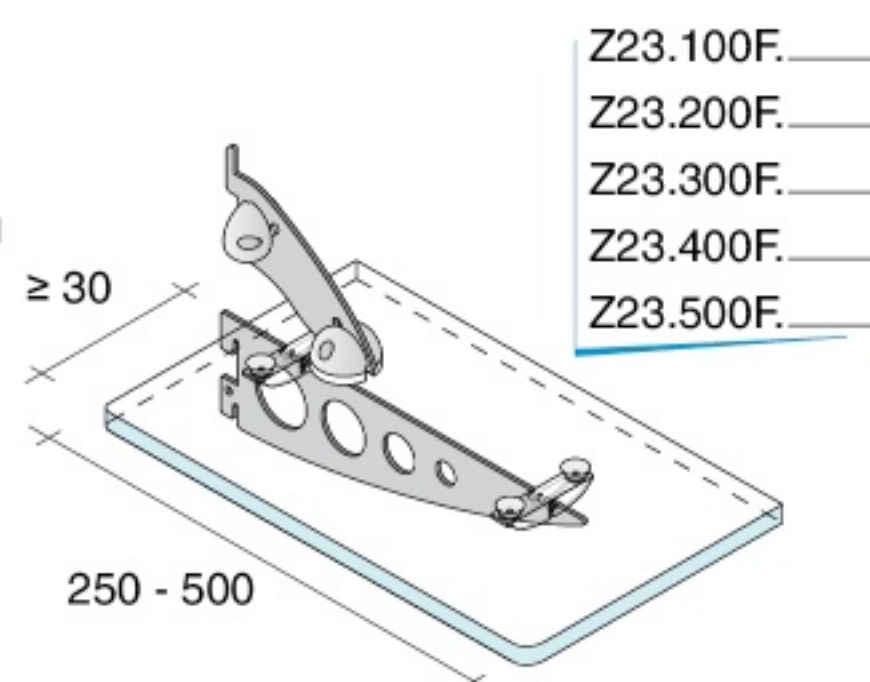

The **coding** depends upon the **PRS blocking device**, to be chosen according to support finishing (solid "P" or openwork "F"). See SPECIFIC ACCESSORIES section, page 63.


PRS.1000.ARG

grey



PRS.2000.CHL

chromium-plated



PRS.3000.ORO

gold




PRS.4000.OTT

brass-plated



PRS.5000.NKS

satinized

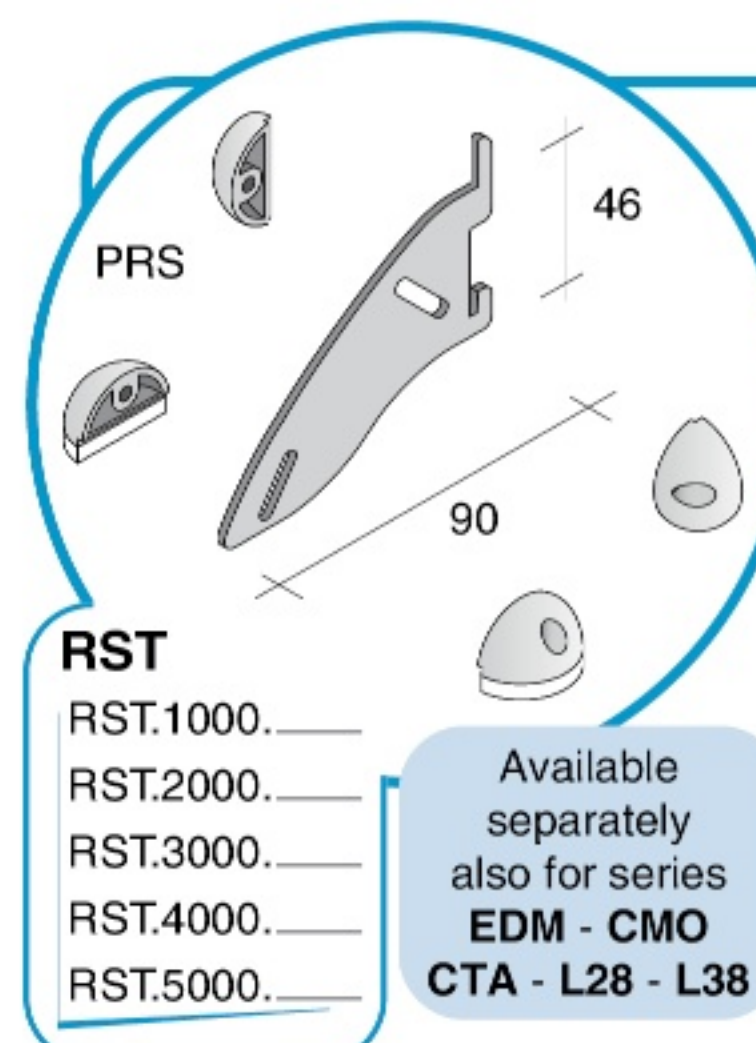

HOW TO INSTALL THE RST BLOCKING ACCESSORY

Place suction pads and saddles on support

VEN.GLA5.TRA

CAV.APCN.TRA

Saddle notch goes towards the wall

Place PRS blocking device into the RST appropriate slots to the very end of their internal stroke



Push RST accessory against the upper solid part of the profile

YES

NO

Pull inferior PRS toward the shelf and screw up

At the last screw up the superior PRS

LOADING CAPACITIES on PAGE 67