


## SHOE RACKS

### SKA

- Al NAT SKA.DX03. - right
- \* ANE SKA.SX03. - left
- \* LUX SKA.CN03. - central


T12.3000. - rod length 3000 mm

Including rod  
fixing systems

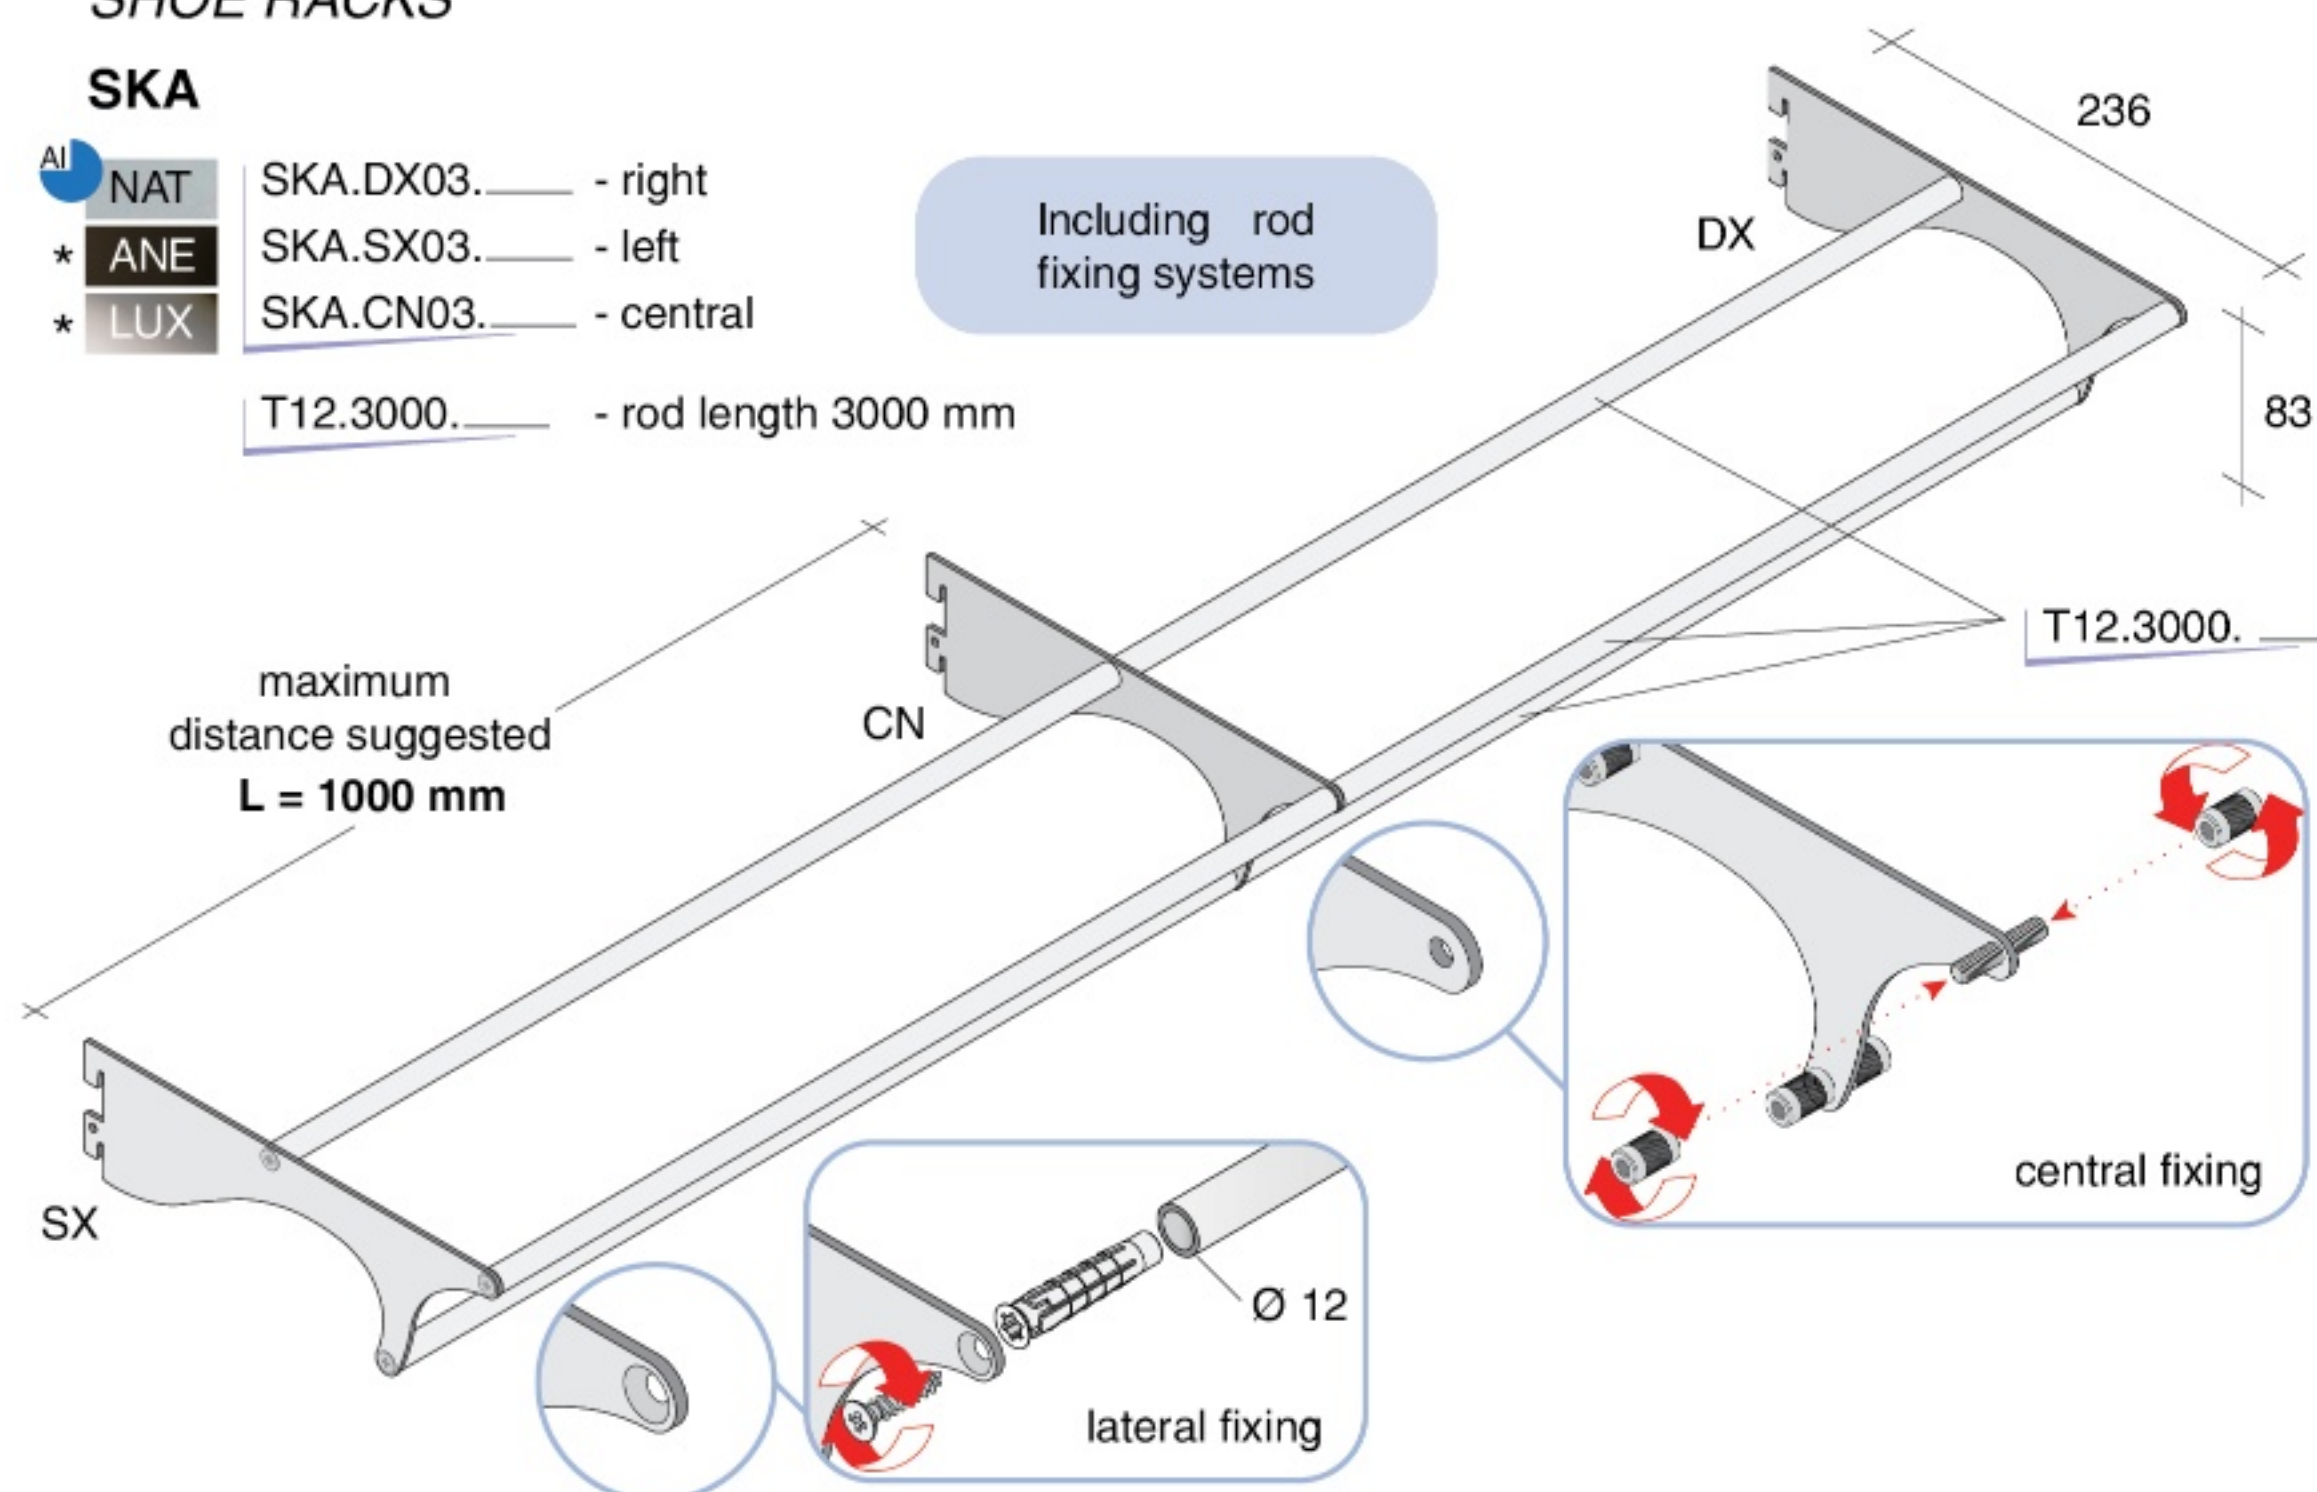


## CD AND DVD RACKS


Inferior lengths on request,  
according to module 250 mm

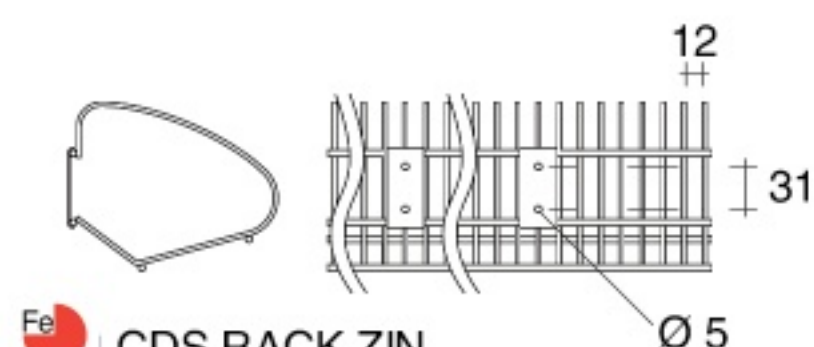

CDS.RACK.ZIN  
- length 1000 mm  
- capacity 66 CDs

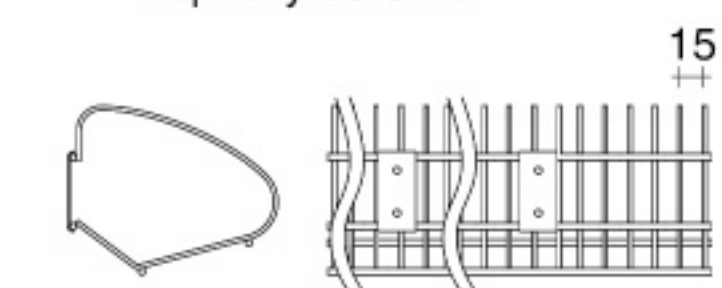

DVD.RACK.ZIN  
- length 1000 mm  
- capacity 55 DVD

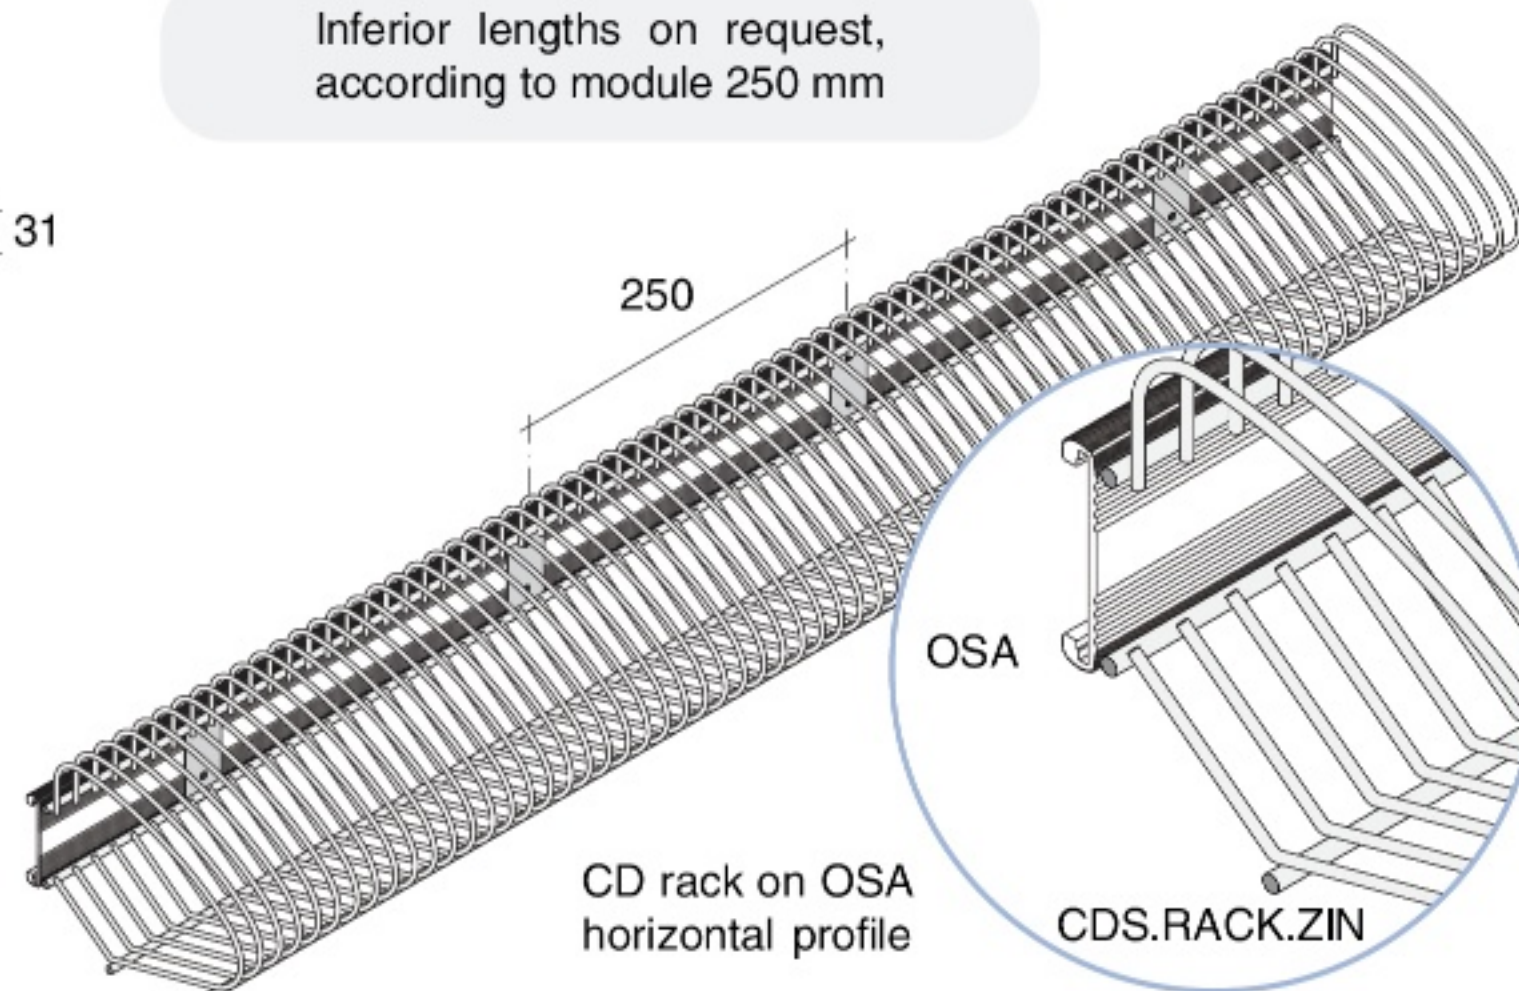


## HORIZONTAL SLAT-PROFILES

Vertically and horizontally adjustable on slotted profile  
with **PAK** and **PAT** series holding plates/brackets

### OSW standard slat-profile with CAP.OSWT caps


- Al OSW.1000.NAT - length 1000 mm
- OSW.1500.NAT - length 1500 mm
- OSW.2000.NAT - length 2000 mm
- OSW.2500.NAT - length 2500 mm
- OSW.3000.NAT - length 3000 mm
- OSW.3000.LUX\* - length 3000 mm

Fe CAP.OSWT.CHL\*  
CAP.OSWT.NKS

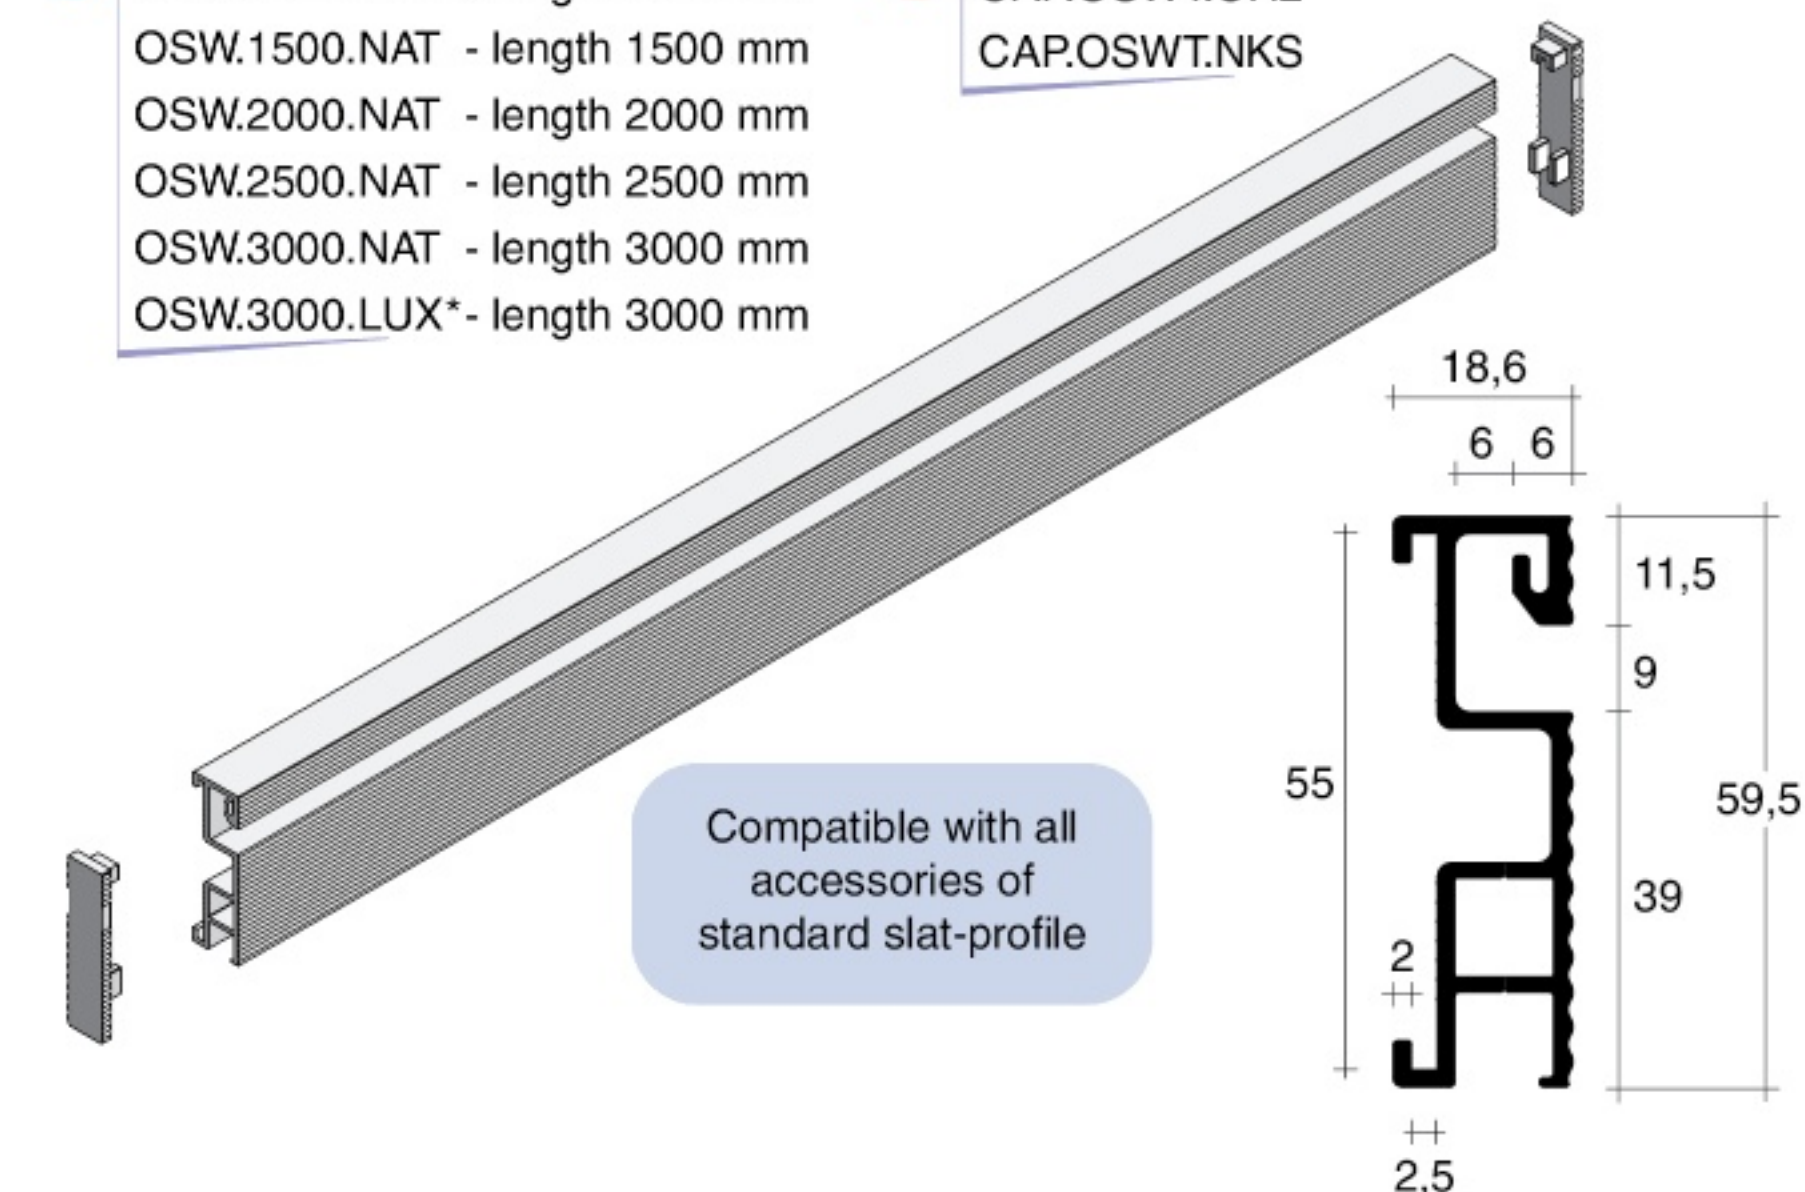

### OSA horizontal profile

- Al OSA.1000.NAT - length 1000 mm
- OSA.1500.NAT - length 1500 mm
- OSA.3000.NAT - length 3000 mm

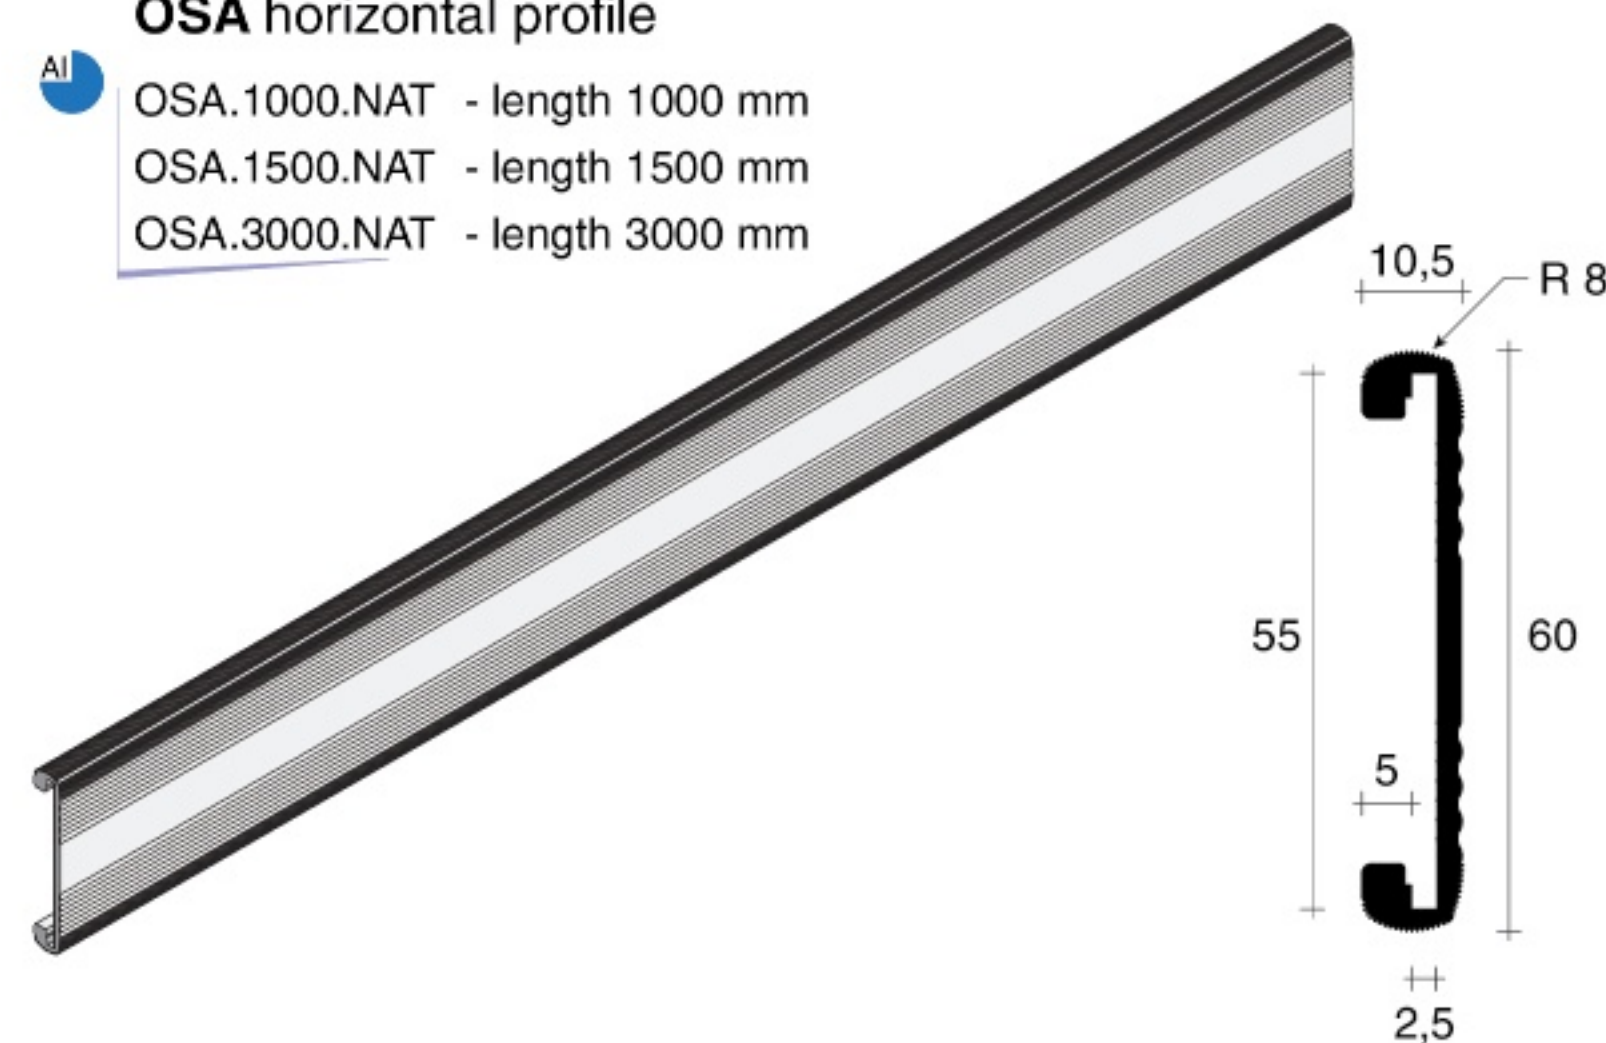







# LOADING capacities

SKA  
Shoe rack  
page 56

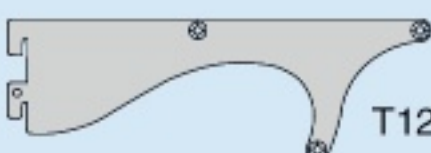Specific accessories	Model	Length [mm]	Height [mm]	Load Aluminium	Load Steel
 T12 (Ø12)	SKA.DX03 SKA.SX03 SKA.CN03	236	83	5 kg	


PAK  
page 58

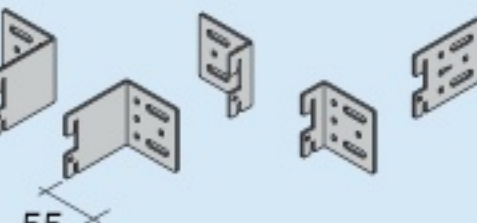Specific accessories	Model	Length [mm]	Height [mm]	Load Aluminium	Load Steel
 55	PAK.DX PAK.SX	10 / 50	55		100 kg


PAT  
page 58

Specific accessories	Model	Length [mm]	Height [mm]	Load Aluminium	Load Steel
 55	PAT.DX PAT.SX	10 / 50	55		100 kg



MFX  
page 59

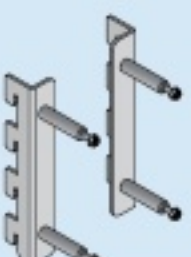Specific accessories	Model	Length [mm]	Height [mm]	Load Aluminium	Load Steel
	MFX.DX96 MFX.SX96	11	140		100 kg

GNC  
page 63

Specific accessories	Model	Length [mm]	Height [mm]	Load Aluminium	Load Steel
	GNC.D302	45	56	10 kg each	20 kg each

TAC  
page 63


Specific accessories	Model	Length [mm]	Height [mm]	Load Aluminium	Load Steel
	TAC.L700	20	37	10 kg	20 kg each
	TAC.T700	24	15	10 kg	

Loading capacity evaluation for single element, on 4 resting points.

## LOADING CAPACITY EVALUATION METHOD

The capacities indicated here refer to a couple of supports with saddles that undergo the following loading test:

- Assembly of 2 slotted profiles, perfectly parallel, suitably fixed at 60 cm distance from each other and fixed to the wall according to the instruction;
- fixing of 2 Fit Art supports to the slotted profiles at the equal height;
- assembly of 4 saddles, two for each support;
- positioning of a 70 cm length shelf on supports, equipped with saddles, with 5 cm overhang on each side (for saddles see pag. 35);
- positioning of the load centered on the shelf (the load is evenly distributed to simulate real application).

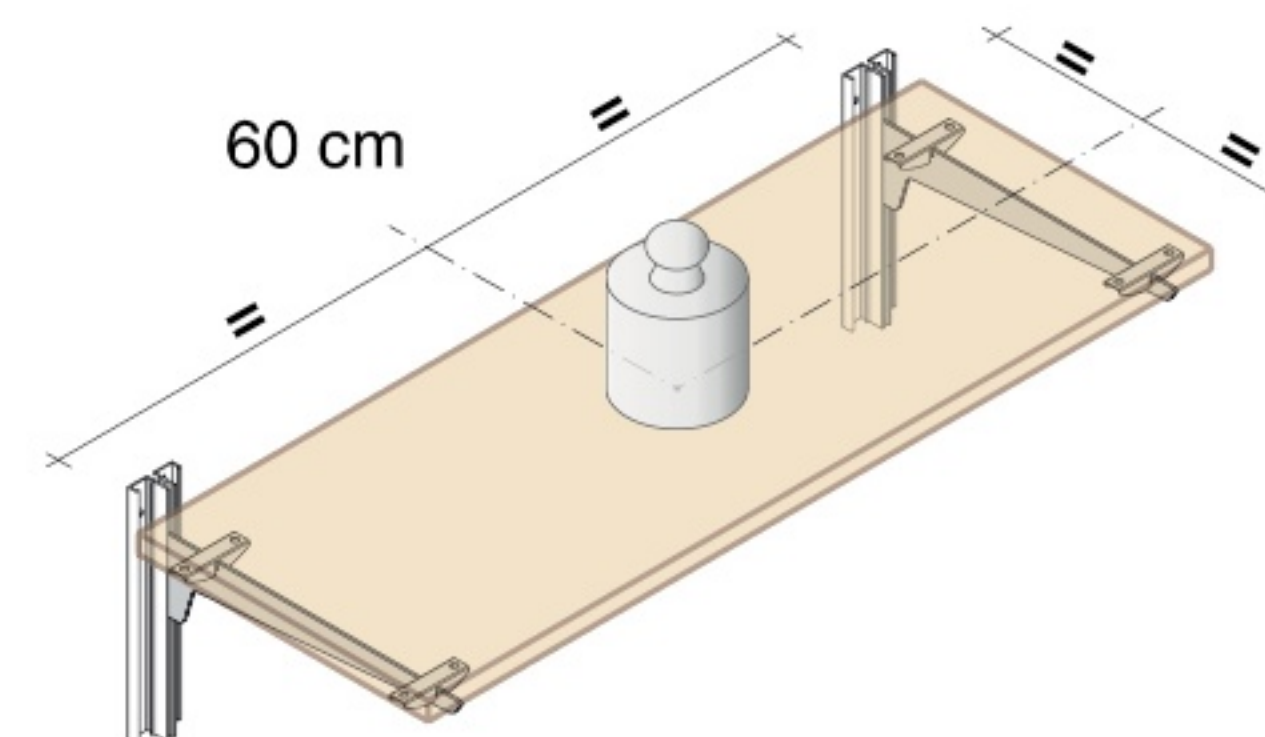

All other Fit Art supports without saddles need to be assembled according to the instruction procedure.

The capacities indicated in the load chart are the **half** of the breaking load.



For the couple of supports that exceed the limit of 200 kg, imposed during loading test, the value 100 kg is indicated.

The loading capacities of all Fit Art products result from the synergy between the manufacturing processes and the items shapes. The slavish reproduction of our products does not determine the same standards of hardness.