




WMP.B360 - INU.LT36 - CAV.A1SX



CMO.0270 - CAV.A2CN

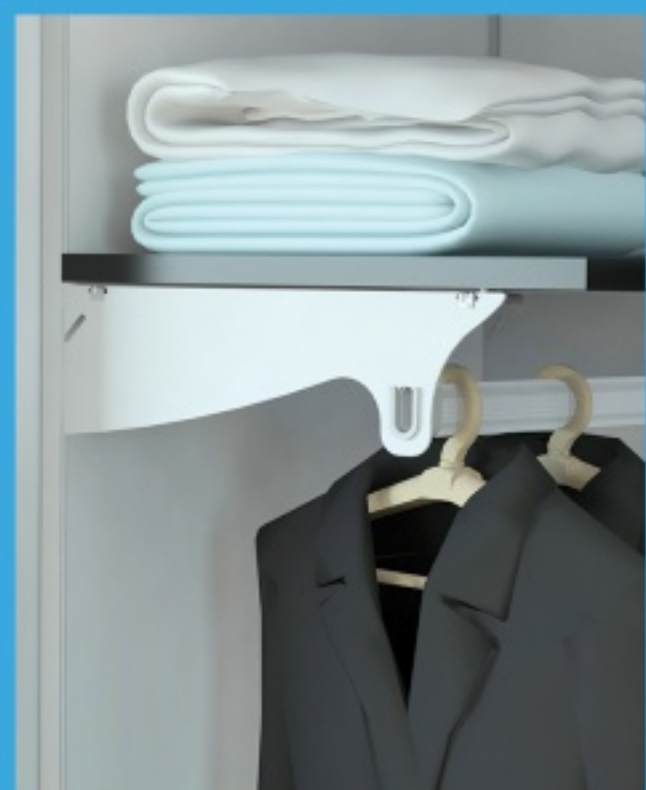

WMP.B360.NAT - CAV.A1SX.ZIN
INU.LT36.ARG - B36.NAT



Wall panelling on NB system profiles (NB1 - NB2 - NB7.DX - NB7.SX - NB6.DX - NB6.SX).
Accessories: WMP.B360 - INU.LT36 - B36 - SKA - CMO.0370 - CMO.0270 - CAV.A2CN
- CAV.A1DX - CAV.A1SX.

Wall composition with PK1 profiles and CPK covers in LUX finishing.

Accessories: EDM.B36P - EDM.380P - CAV.A2CN - CAV.A1DX - CAV.A1SX - B36 - SKA - PAK.




CAV.A2CN.CHL



EDM.B36P - INU.LT36 - B36
CAV.A2CN



EDM.380P.CHL - CAV.A2CN.CHL

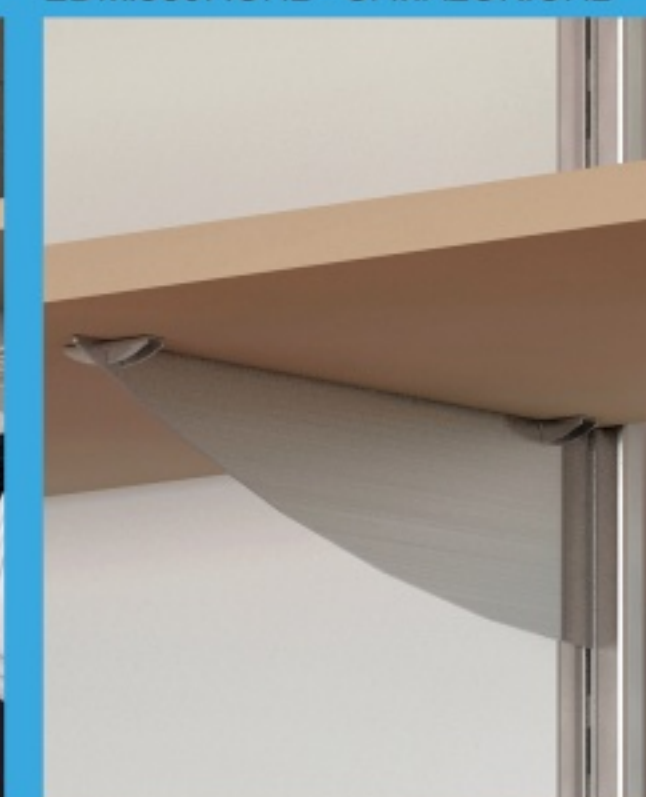





Supports with saddles for wood/glass shelves


Saddles - instructions for use on page 35

FIT
ART


EDM series - from 80 to 380 mm

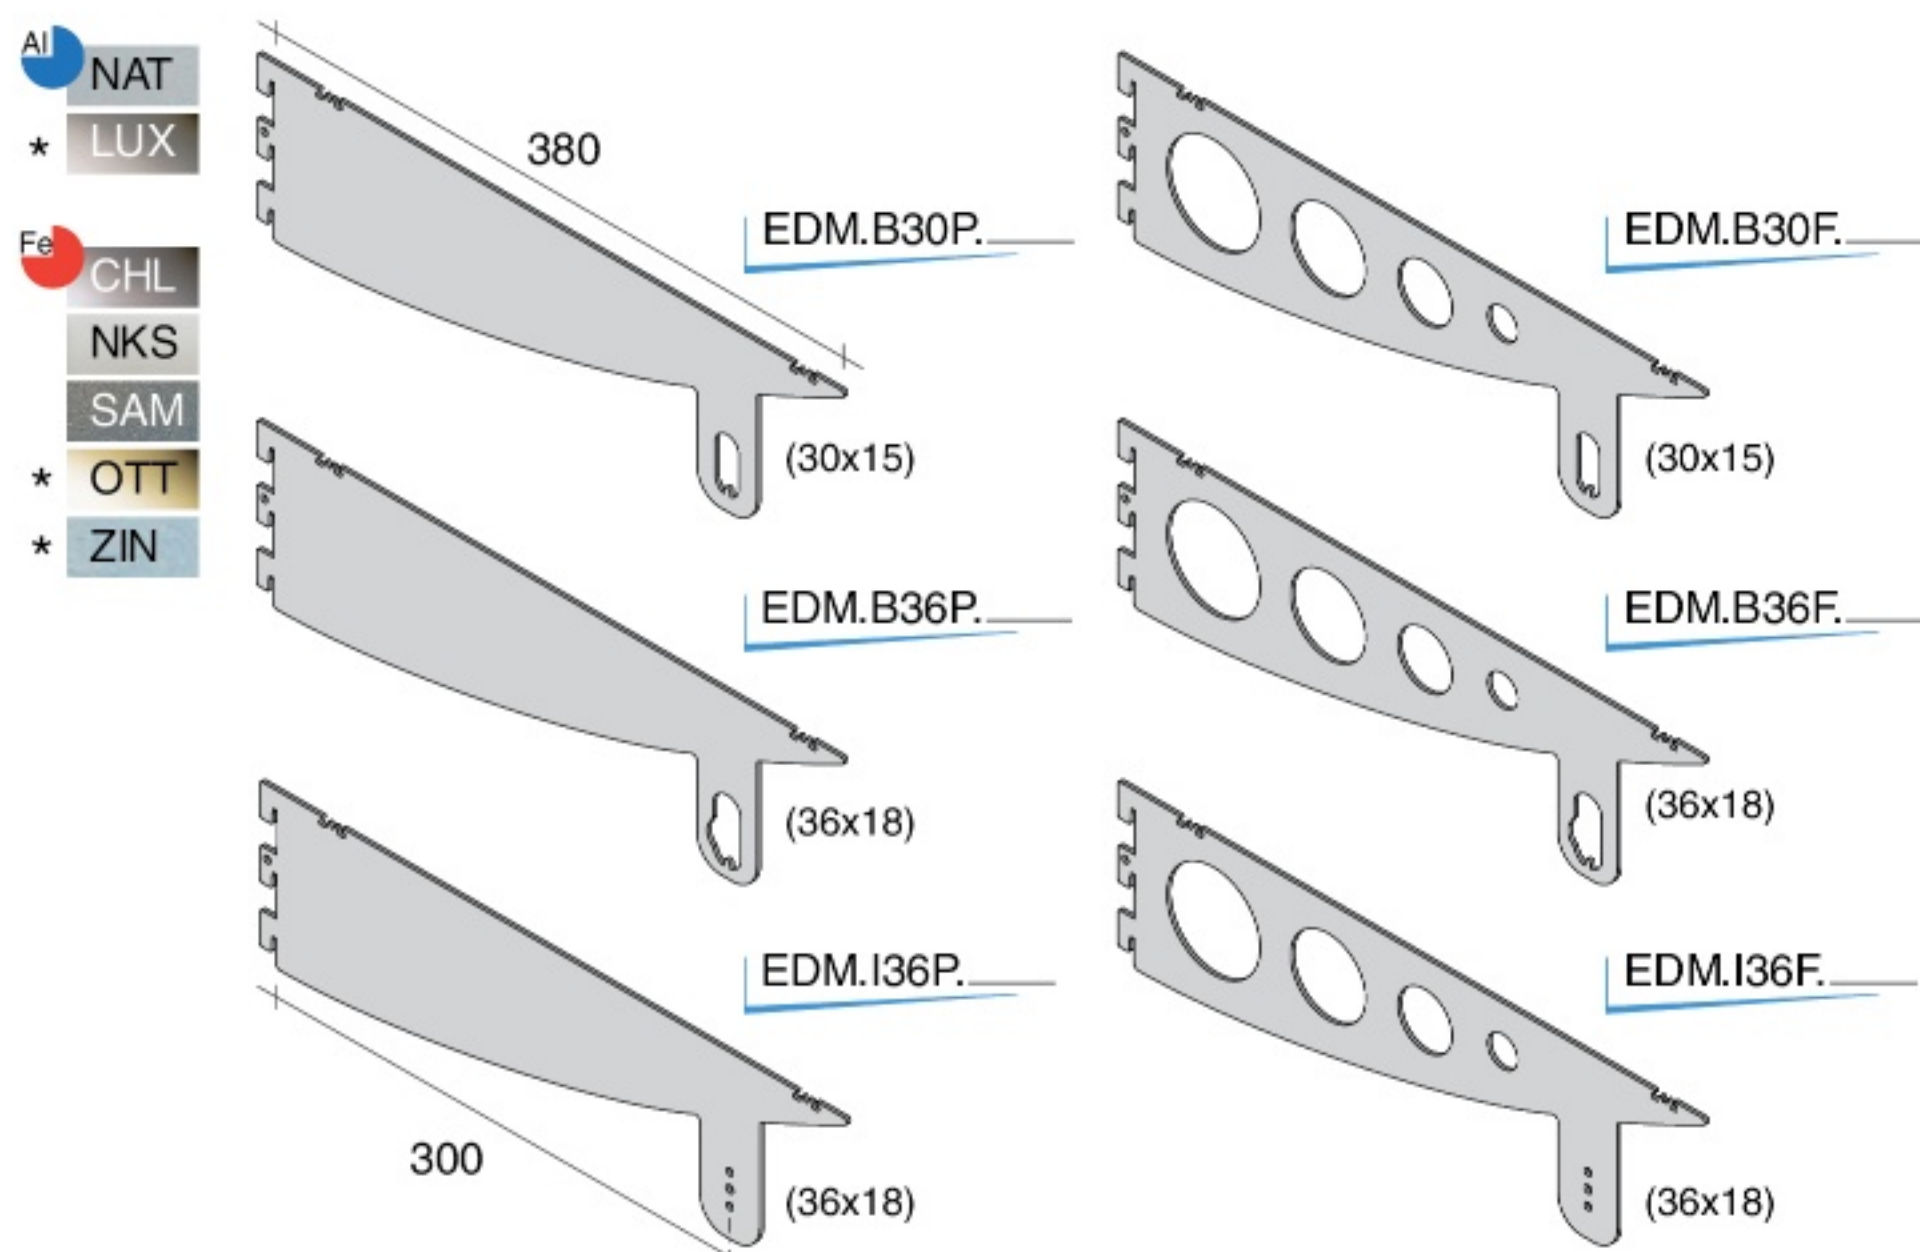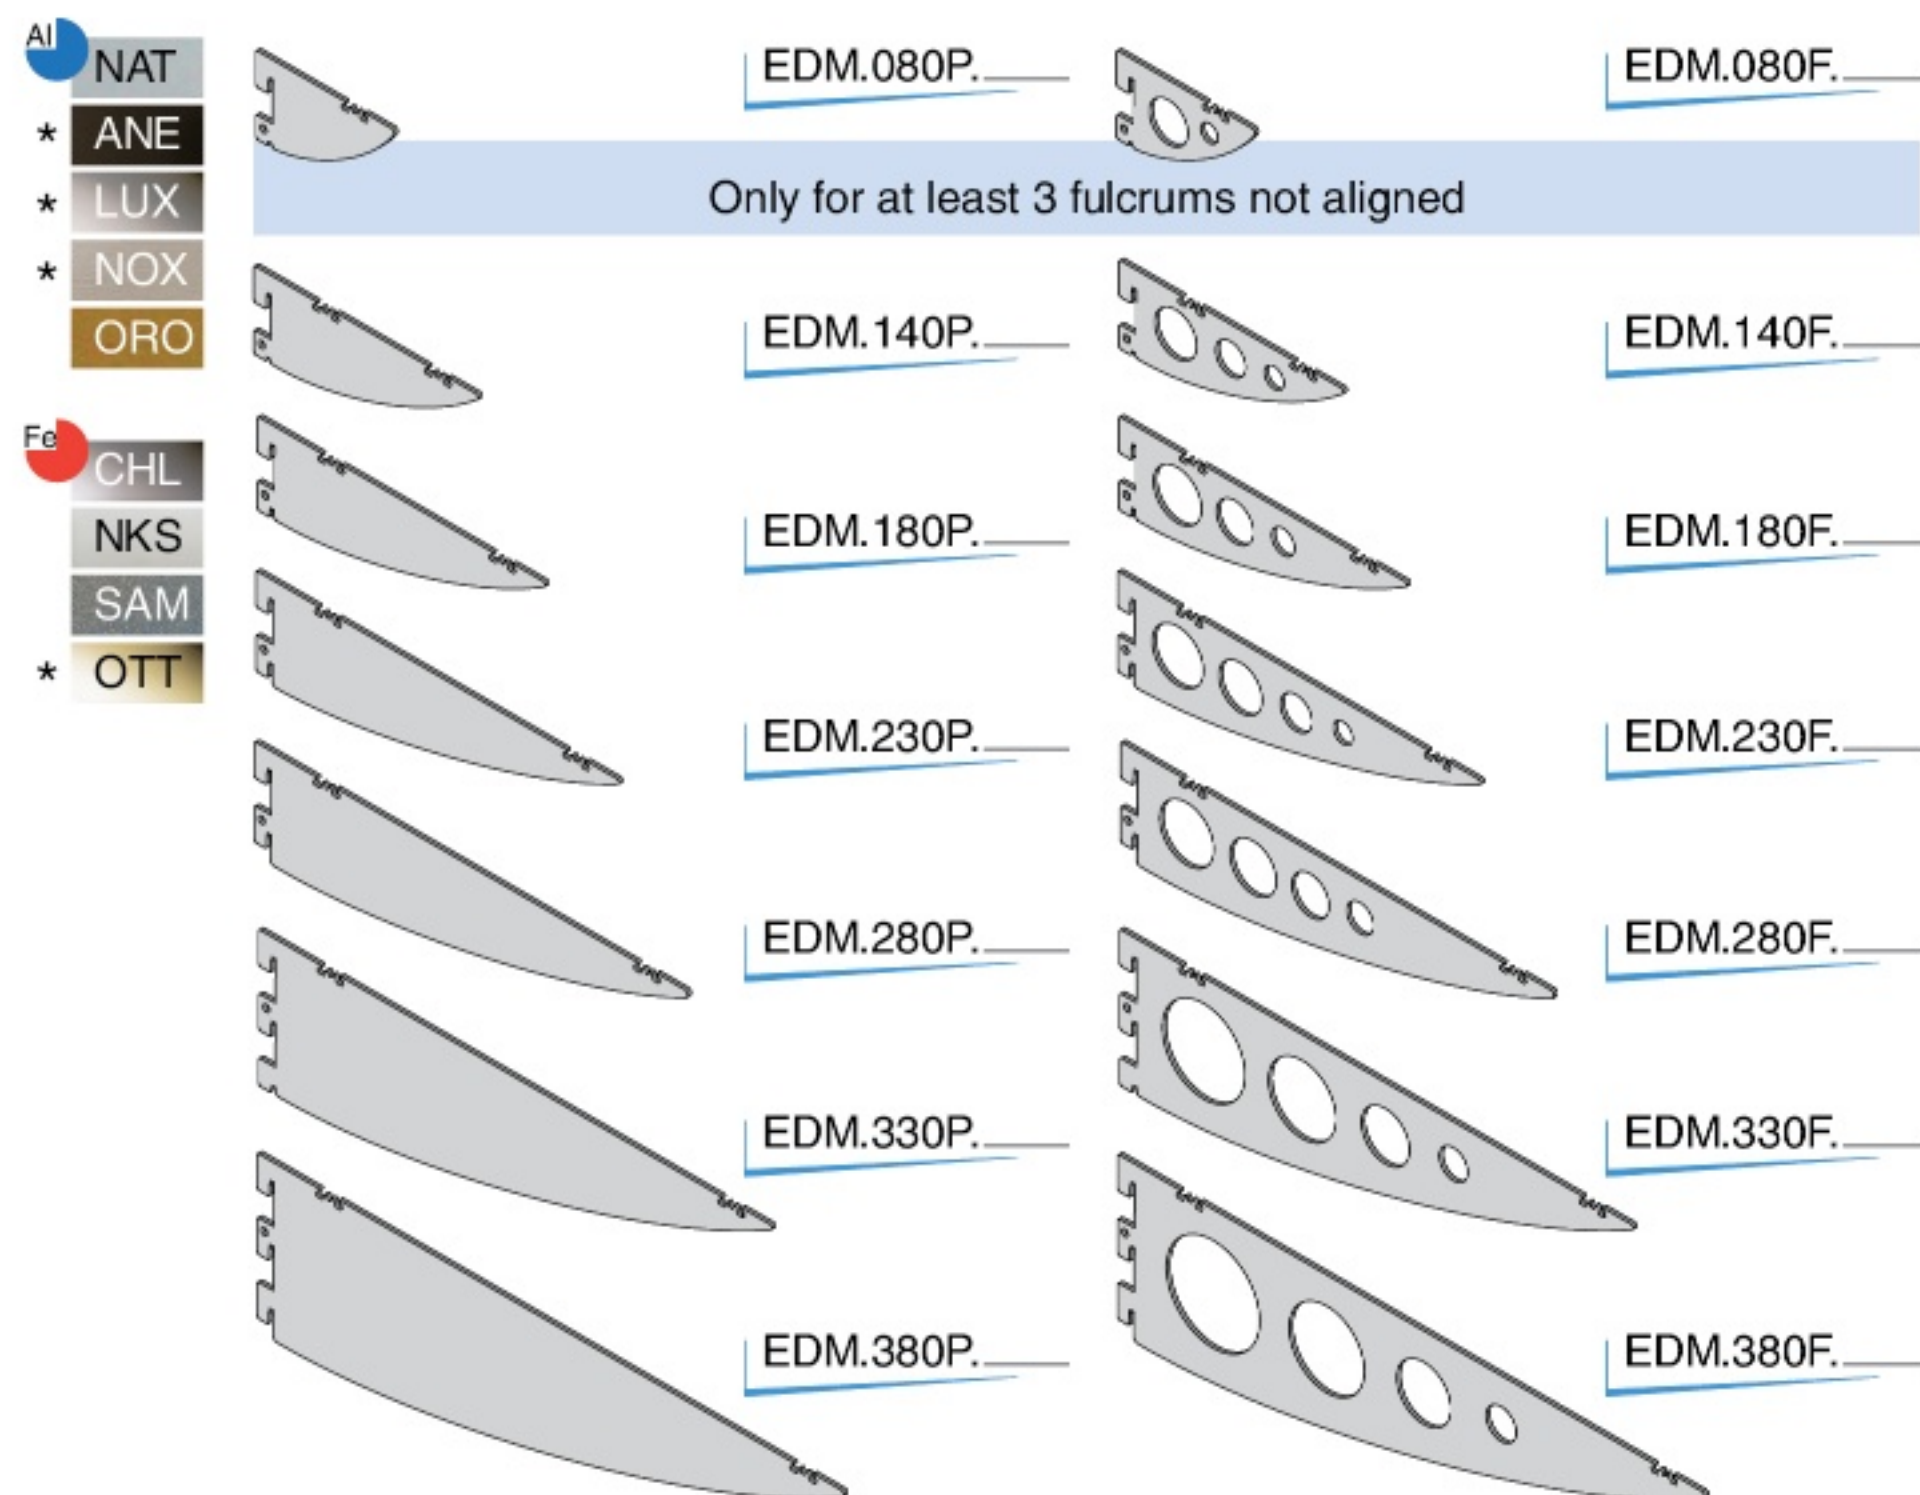


CTA series - from 150 to 400 mm

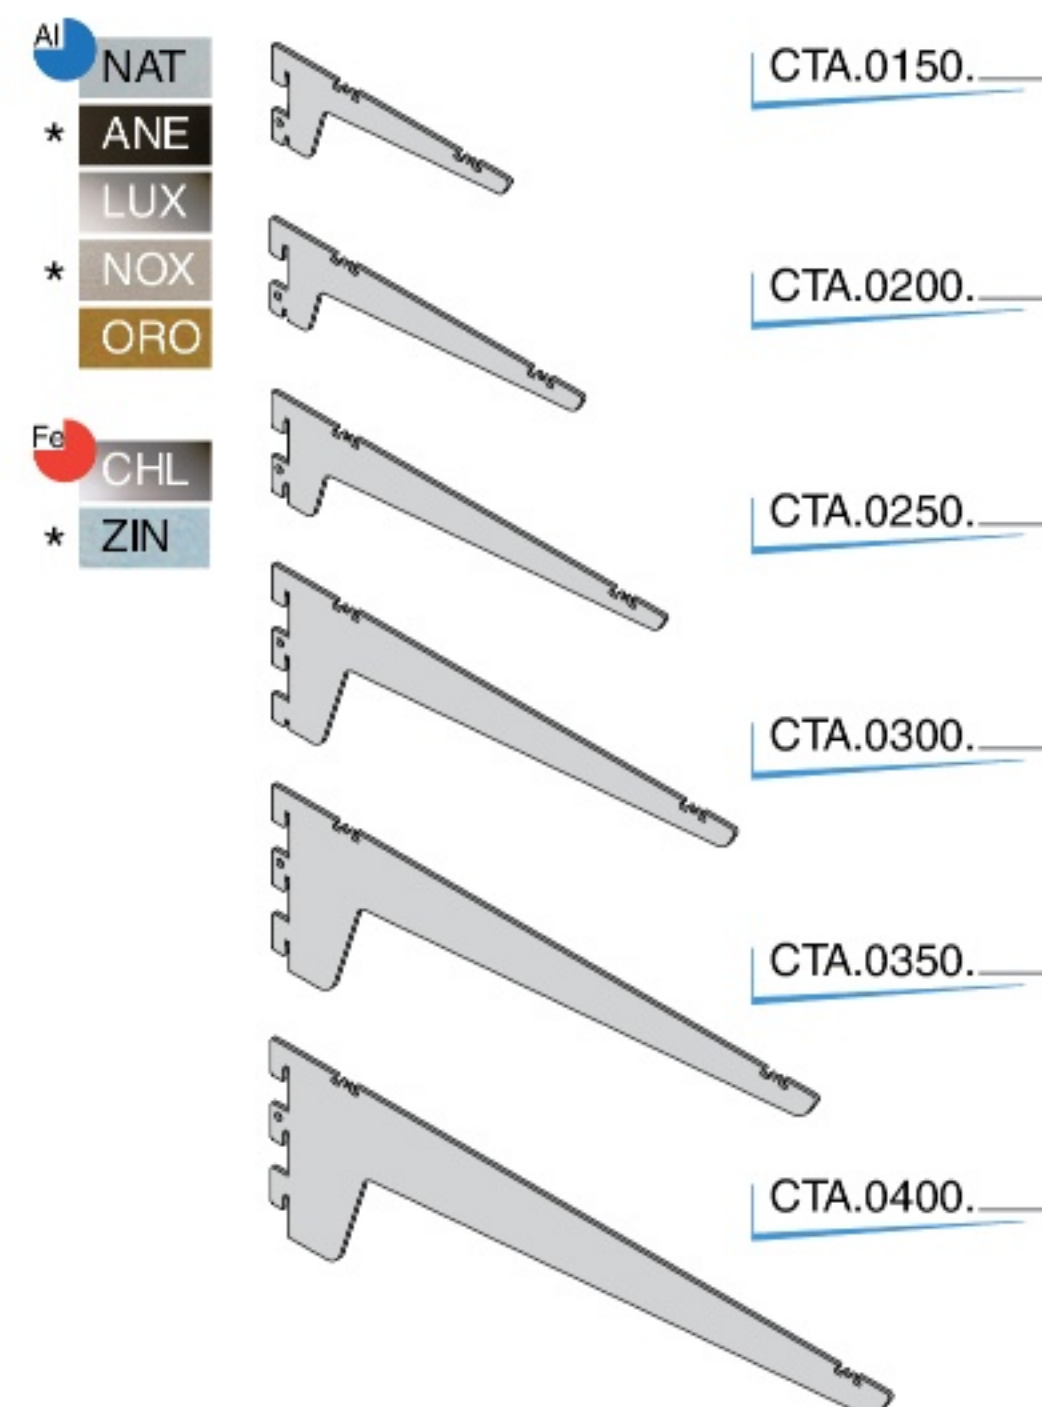

WMP series - 380 mm

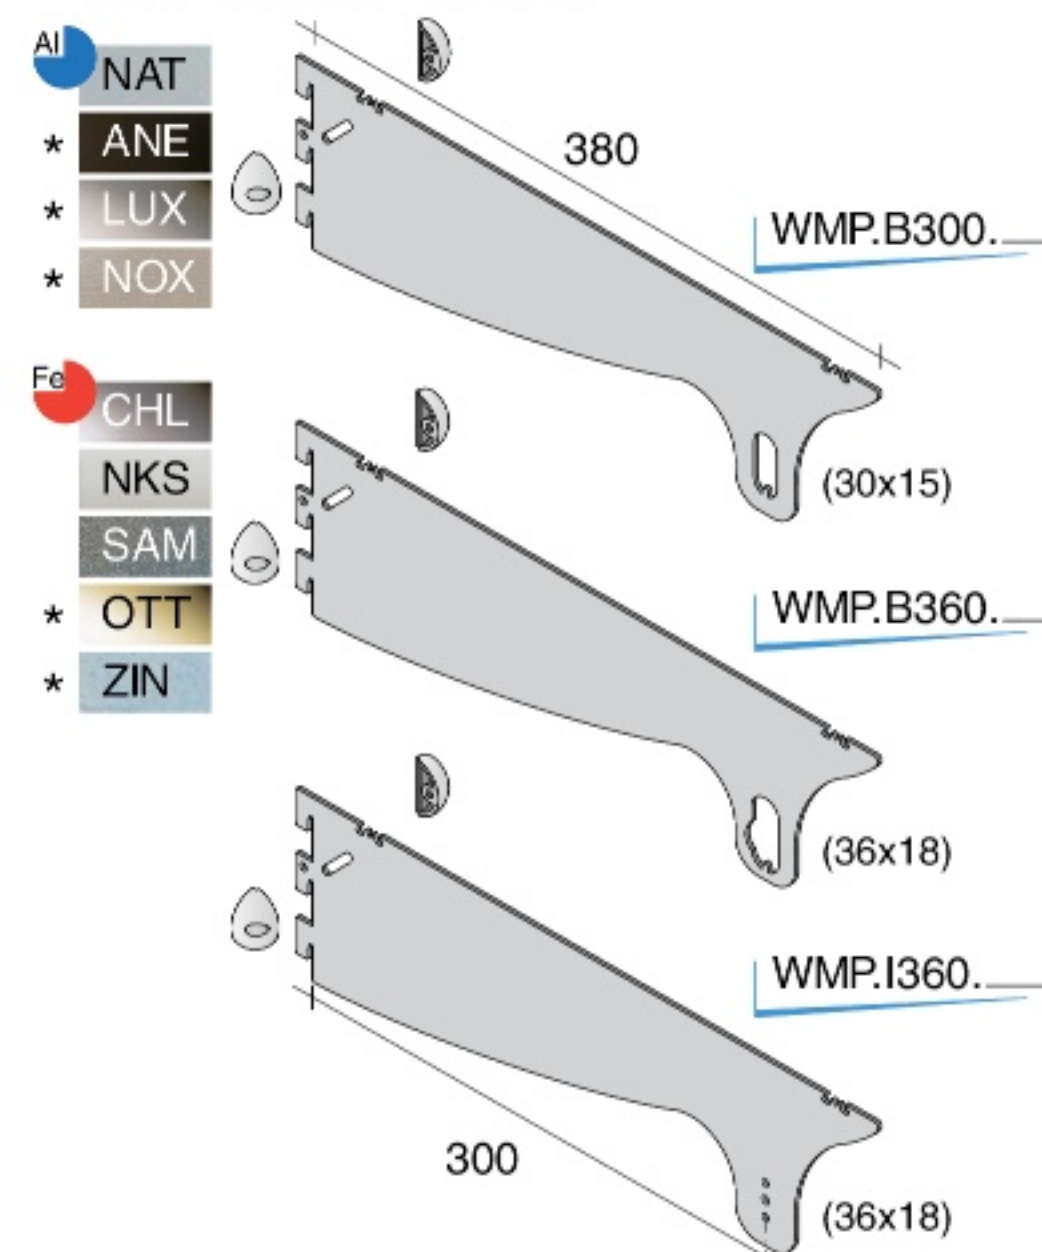

CMO series - from 170 to 550 mm

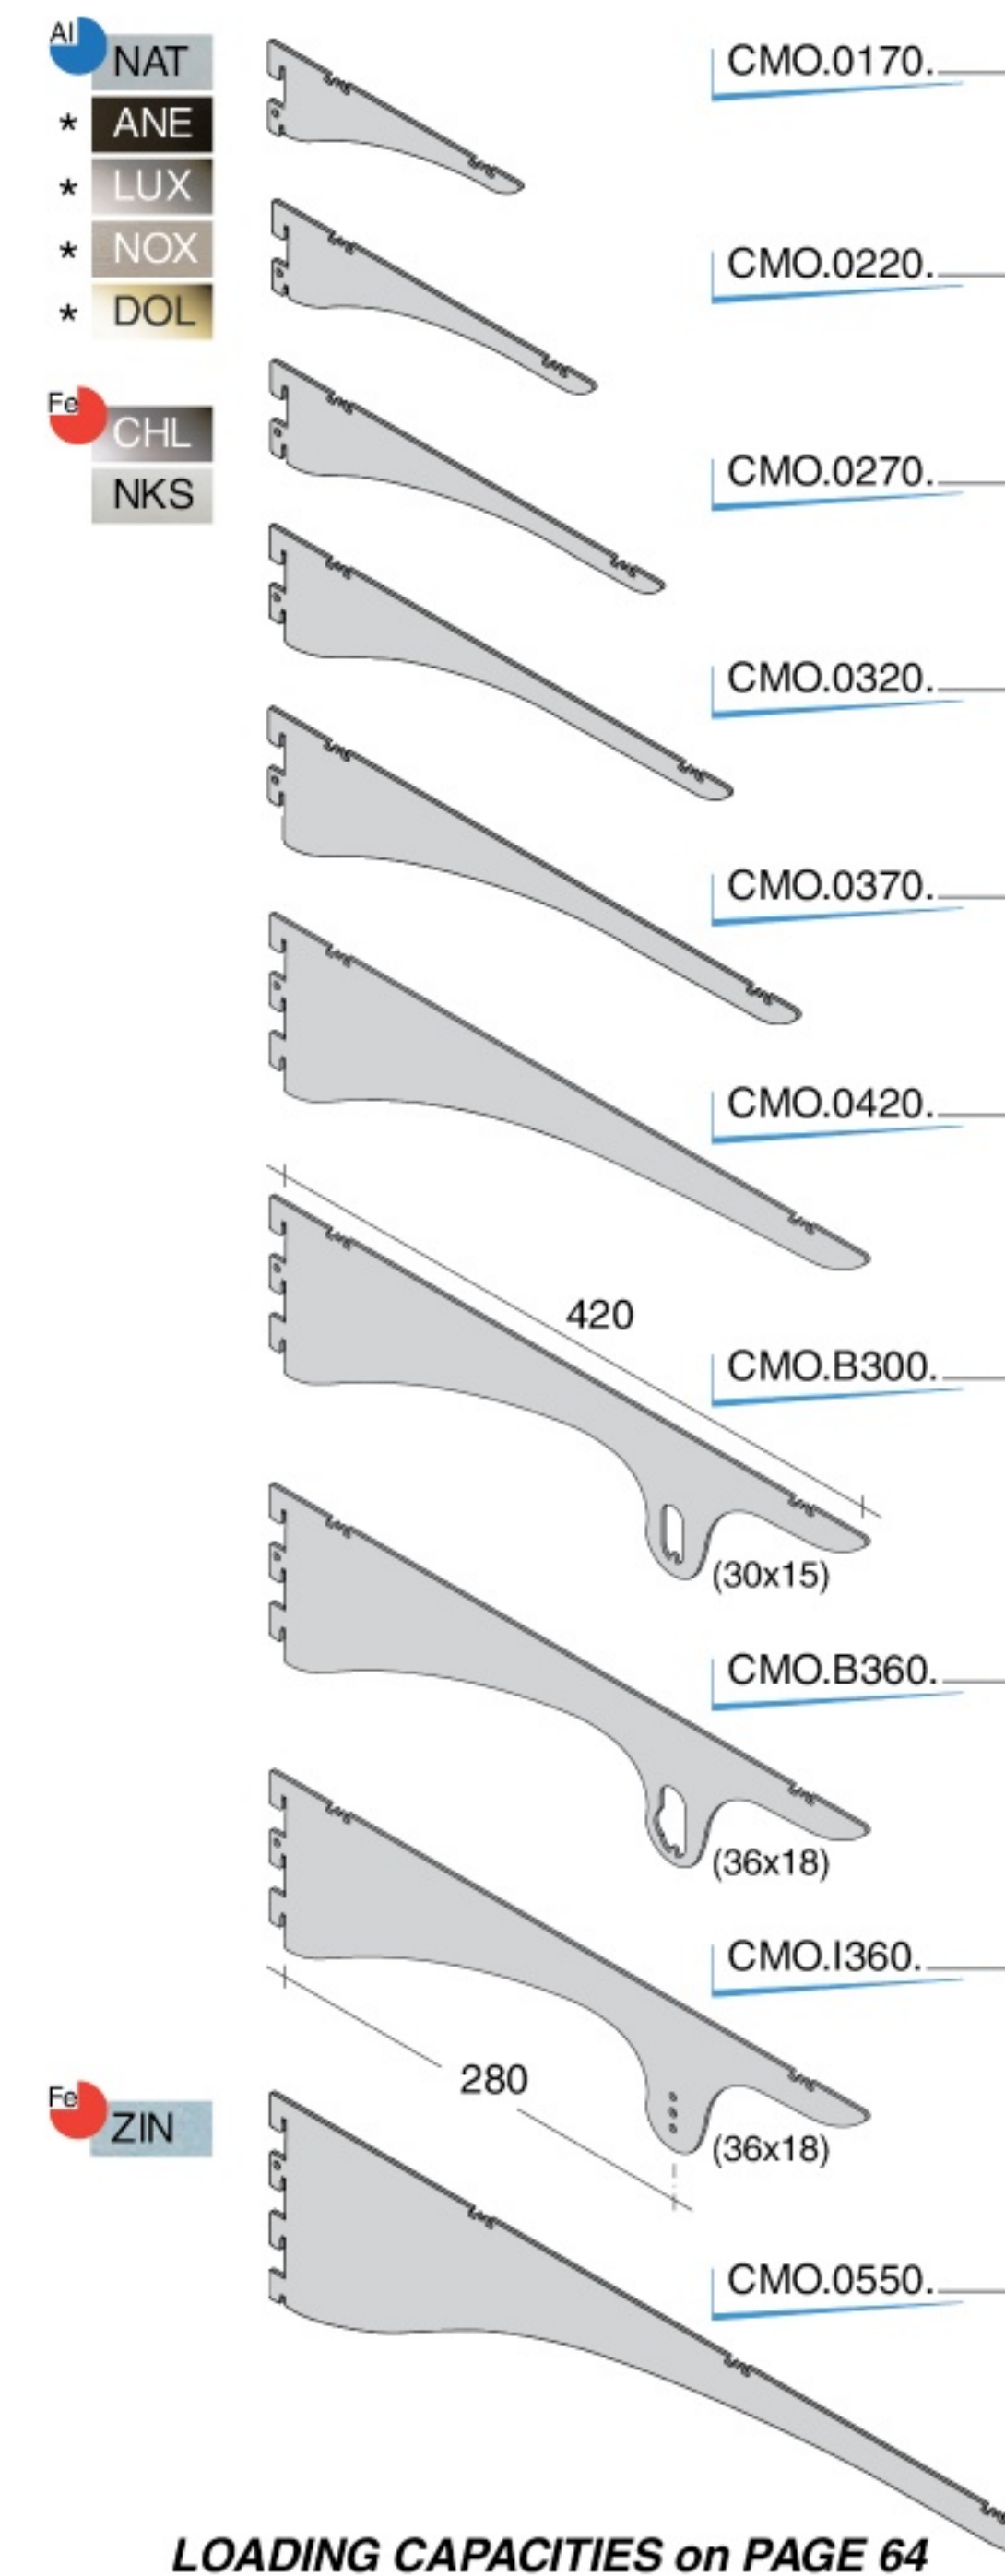


LOADING CAPACITIES on PAGE 64




SADDLES for wood/glass shelves


A series

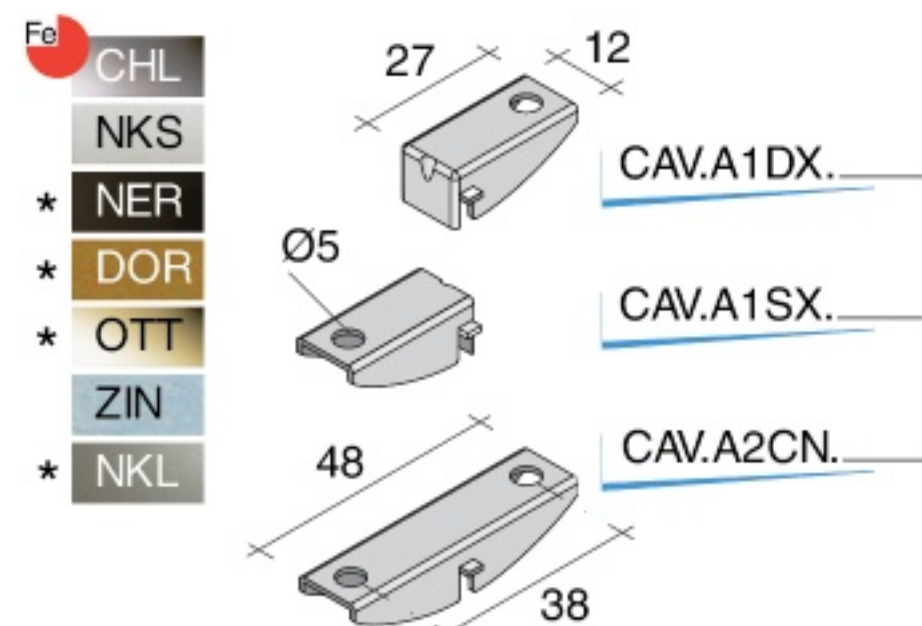


T series - for pre-drilled shelves

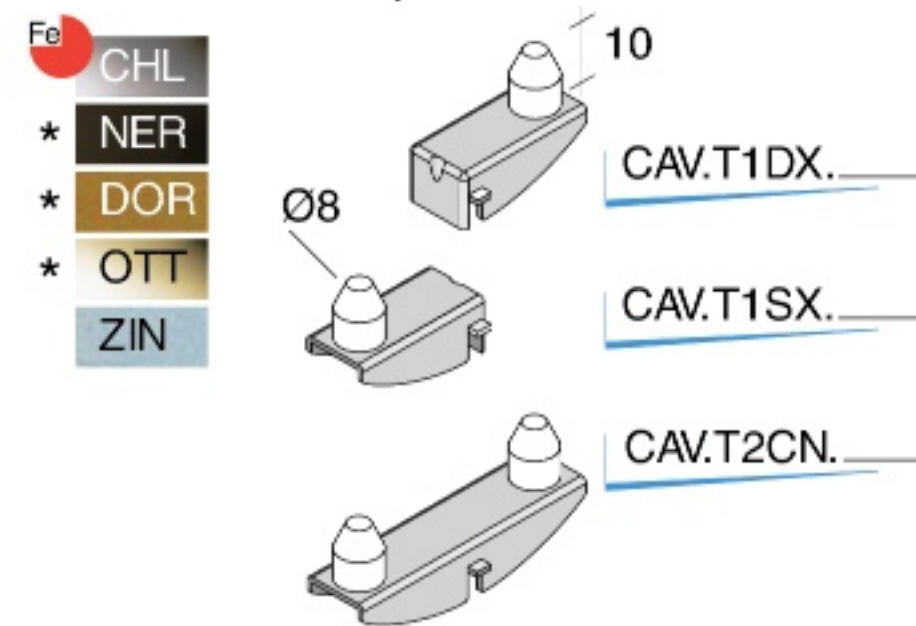

AP series

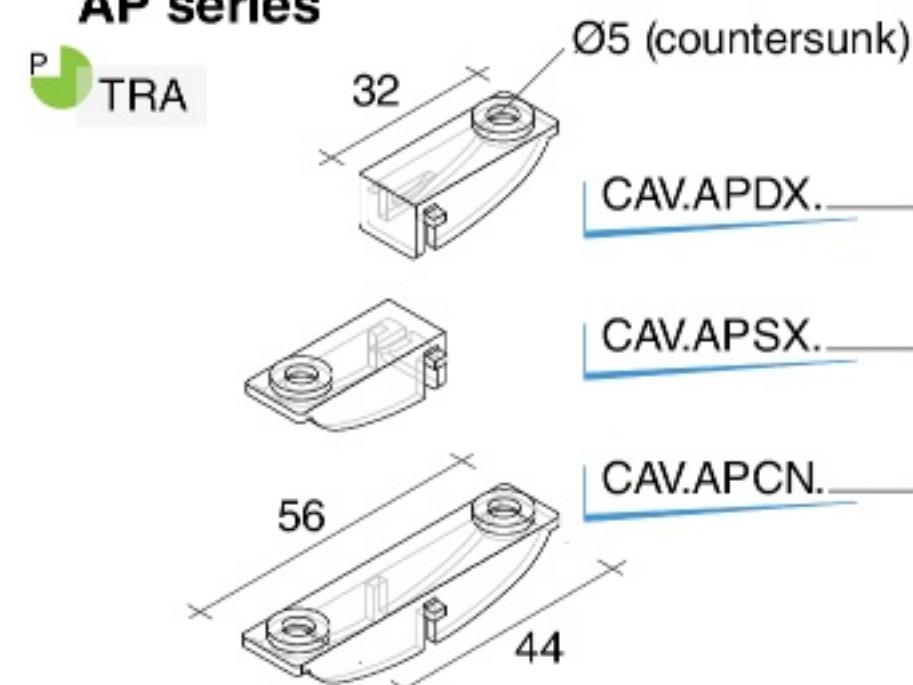


SUCTION PAD

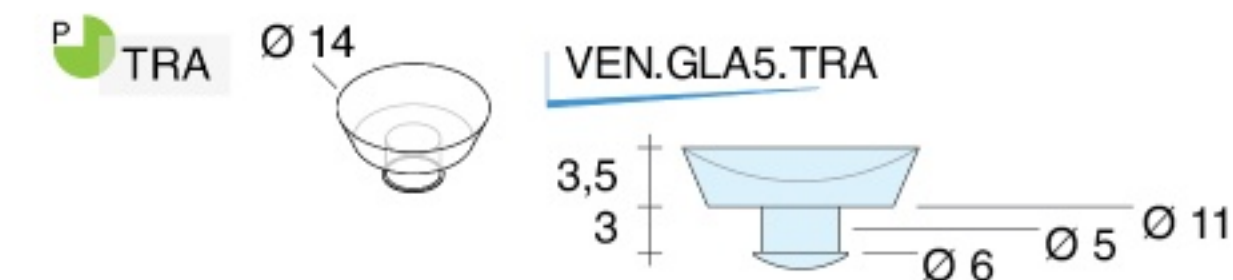

RESTING PAD




S series

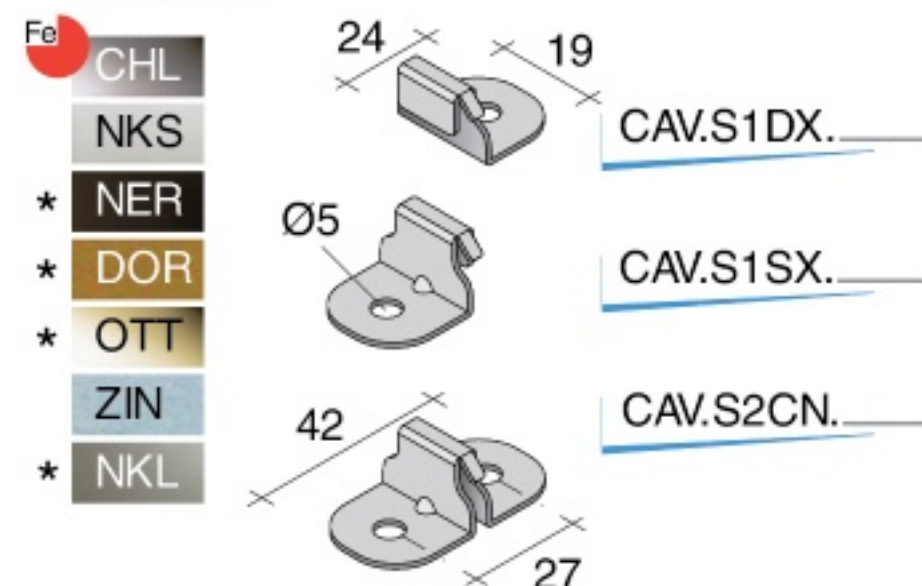

Slab thickness
8 mm flush
with support

R series

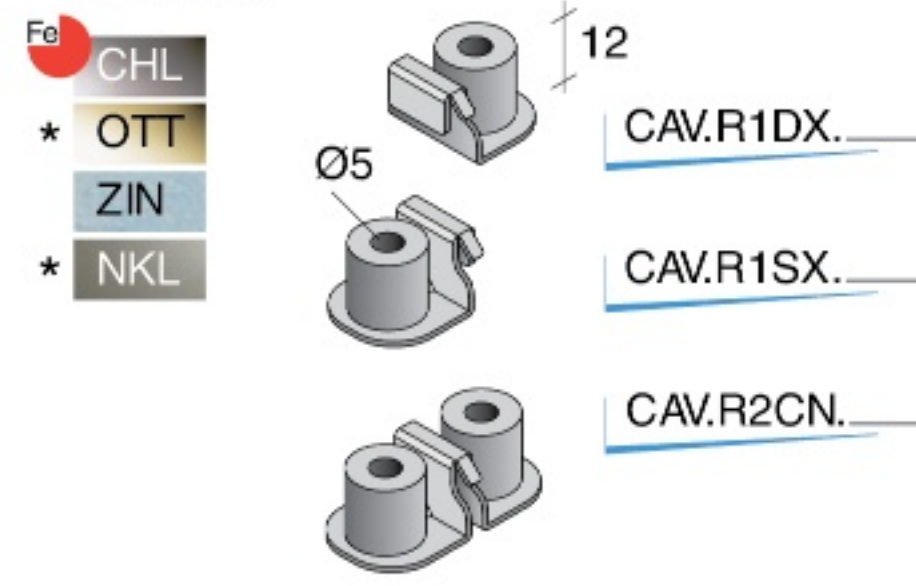


Cylindrical pin with hole for
suction pad or fixing screws

fixing screw

CAV.RVIT.ZIN
pack 100 pcs


ADJUSTABLE

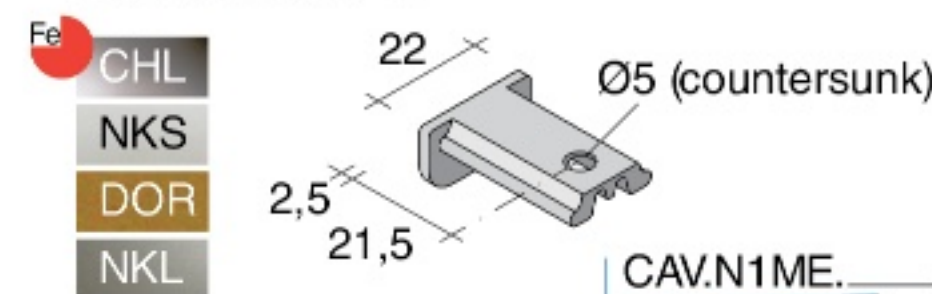

CAV.N1ME
are **NOT** compatible
with **CR2** slotted profile

15 mm clearance
allows to move the
shelf together with
the support

ADHESIVE PADS

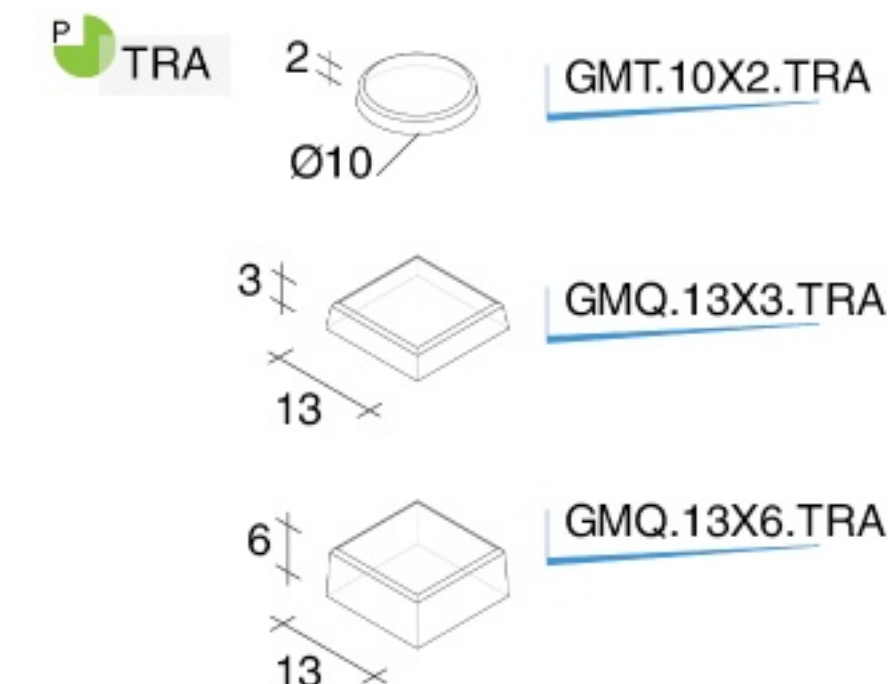

CAV.A2CN - CAV.T2CN - CAV.S - CAV.R


Load stability assured

CAV.A - CAV.T - CAV.AP

Stability subjected to
load placement

CAV.AP

The load limit
calculates that the shelf
positioning discharges
the burden on support.

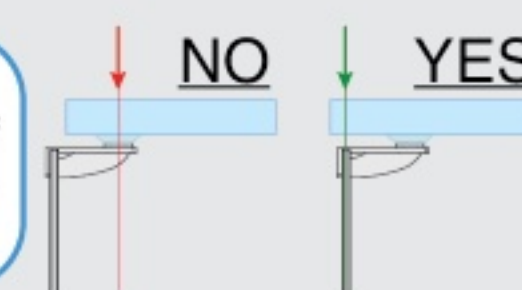

Notes

Saddle notch goes
towards the wall in
order to avoid shelf
overturn.

SADDLE
NOTCH

Shelves have to be
disassembled in order
to move the supports,
with the exception of
CAV.N1ME.

**NEVER
IMBALANCED
LOADS!**

LOADING capacities



EDM
openwork
page 33

Supports with saddles for wood/glass shelves	Model	Length [mm]	Height [mm]	Load Aluminium	Load Steel
	EDM.080F	80	51	60 kg	80 kg
	EDM.140F	140	51	60 kg	80 kg
	EDM.180F	180	54	60 kg	80 kg
	EDM.230F	230	62	50 kg	70 kg
	EDM.280F	280	66	50 kg	70 kg
	EDM.330F	330	90	50 kg	70 kg
	EDM.380F	380	103	40 kg	60 kg
	EDM.B30F	380	108	40 kg	70 kg
	EDM.B36F	380	108	40 kg	70 kg
	EDM.I36F	380	108	40 kg	70 kg

CMO
page 33

	CMO.0170	170	53	60 kg	90 kg
	CMO.0220	220	55	60 kg	90 kg
	CMO.0270	270	59	60 kg	90 kg
	CMO.0320	320	69	40 kg	60 kg
	CMO.0370	370	76	40 kg	60 kg
	CMO.0420	420	106	50 kg	70 kg
	CMO.B300	420	106	50 kg	70 kg
	CMO.B360	420	106	50 kg	70 kg
	CMO.I360	420	106	50 kg	70 kg
	CMO.0550	550	128	—	100 kg

EDM
solid
page 33

Supports with saddles for wood/glass shelves	Model	Length [mm]	Height [mm]	Load Aluminium	Load Steel
	EDM.080P	80	51	70 kg	90 kg
	EDM.140P	140	51	70 kg	90 kg
	EDM.180P	180	54	70 kg	90 kg
	EDM.230P	230	62	60 kg	80 kg
	EDM.280P	280	66	60 kg	80 kg
	EDM.330P	330	90	60 kg	80 kg
	EDM.380P	380	103	50 kg	70 kg
	EDM.B30P	380	108	50 kg	80 kg
	EDM.B36P	380	108	50 kg	80 kg
	EDM.I36P	380	108	50 kg	80 kg

CTA
page 33

	CTA.0150	150	54	60 kg	90 kg
	CTA.0200	200	54	60 kg	90 kg
	CTA.0250	250	60	60 kg	90 kg
	CTA.0300	300	90	60 kg	80 kg
	CTA.0350	350	102	50 kg	80 kg
	CTA.0400	400	109	50 kg	80 kg


WMP
page 33

	WMP.B300	380	108	70 kg	90 kg
	WMP.B360	380	108	70 kg	90 kg
	WMP.I360	380	108	70 kg	90 kg


page 35

Saddles


CAV.A



CAV.T



CAV.AP



CAV.S



CAV.R







CAV.N1ME





LOADING capacities

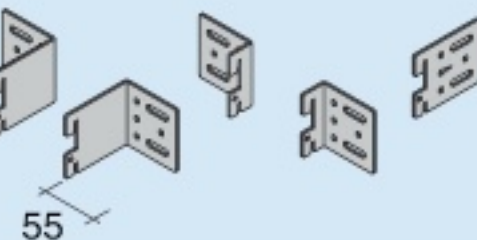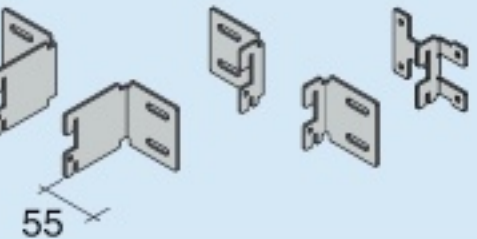
	Specific accessories	Model	Length [mm]	Height [mm]	Load Aluminium	Load Steel
SKA Shoe rack page 56	 T12 (Ø12)	SKA.DX03 SKA.SX03 SKA.CN03	236	83	5 kg	
PAK page 58		PAK.DX PAK.SX	10 / 50	55		100 kg
PAT page 58		PAT.DX PAT.SX	10 / 50	55		100 kg
MFX page 59		MFX.DX96 MFX.SX96	11	140		100 kg
GNC page 63		GNC.D302	45	56	10 kg each	20 kg each
TAC page 63		TAC.L700 TAC.T700	20 24	37 15	10 kg 10 kg	20 kg each —

Loading capacity evaluation for single element, on 4 resting points.

LOADING CAPACITY EVALUATION METHOD

The capacities indicated here refer to a couple of supports with saddles that undergo the following loading test:

- Assembly of 2 slotted profiles, perfectly parallel, suitably fixed at 60 cm distance from each other and fixed to the wall according to the instruction;
- fixing of 2 Fit Art supports to the slotted profiles at the equal height;
- assembly of 4 saddles, two for each support;
- positioning of a 70 cm length shelf on supports, equipped with saddles, with 5 cm overhang on each side (for saddles see pag. 35);
- positioning of the load centered on the shelf (the load is evenly distributed to simulate real application).

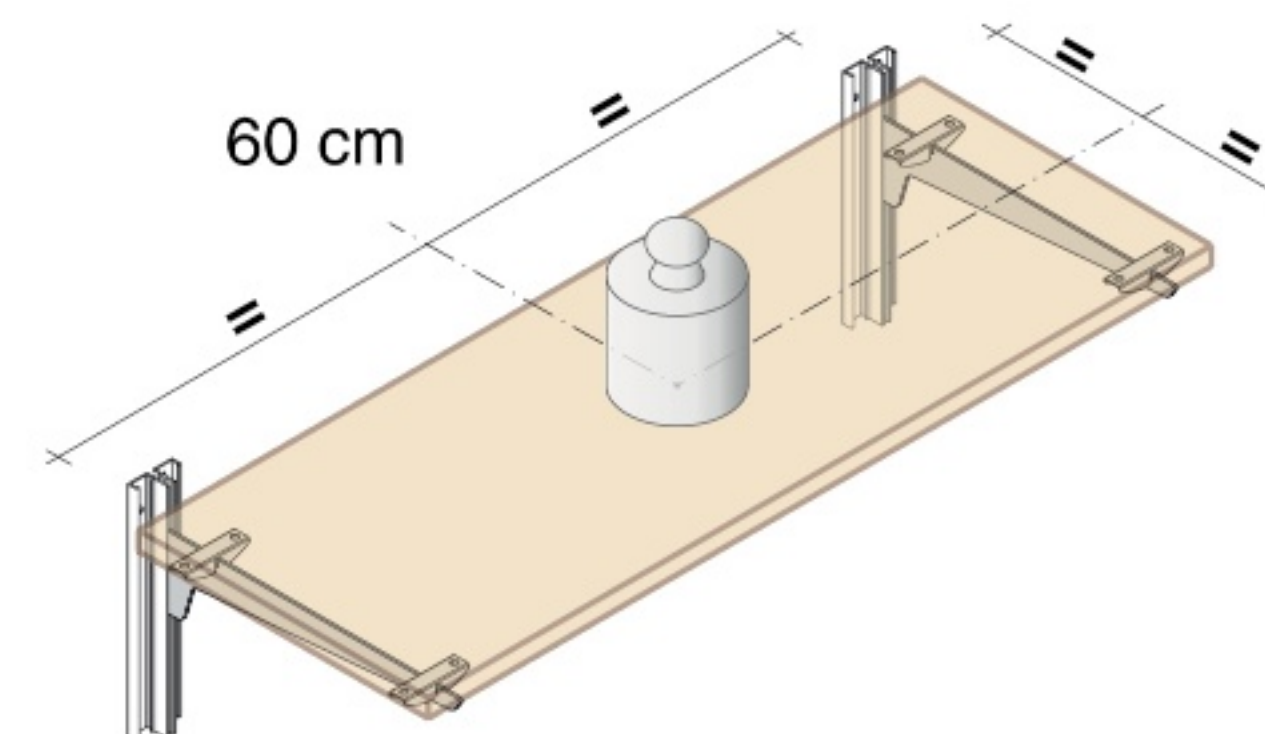

All other Fit Art supports without saddles need to be assembled according to the instruction procedure.

The capacities indicated in the load chart are the **half** of the breaking load.



For the couple of supports that exceed the limit of 200 kg, imposed during loading test, the value 100 kg is indicated.

The loading capacities of all Fit Art products result from the synergy between the manufacturing processes and the items shapes. The slavish reproduction of our products does not determine the same standards of hardness.