





CMO.G - for 8 mm glass thickness

Al NAT
* ANE
* LUX

CMO.G19A.____ - with grey gasket
CMO.G19N.____ - with black gasket

Fe CHL

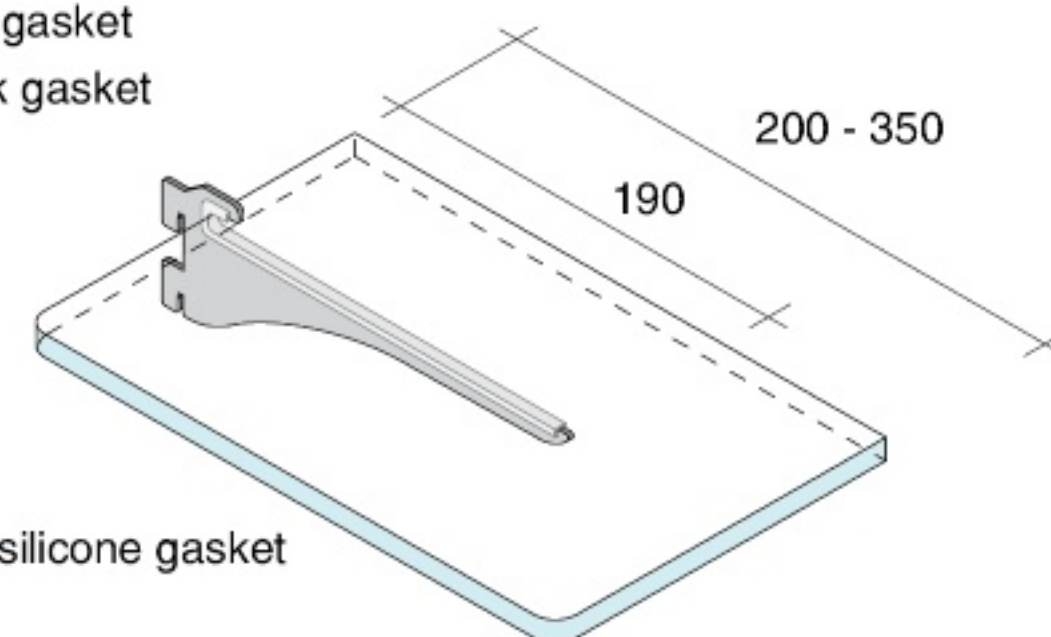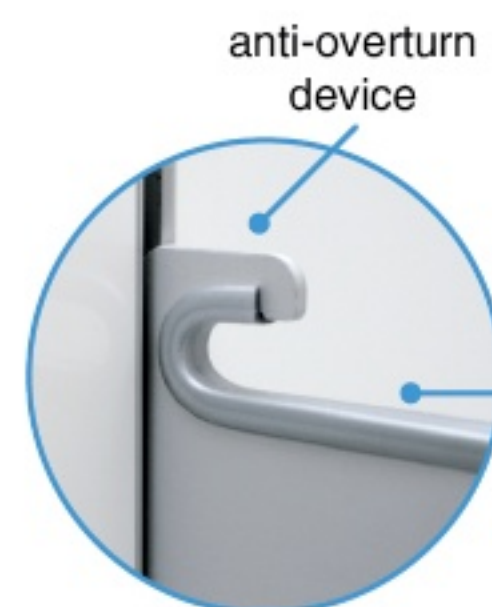


CTA.G - for 8 mm glass thickness


Al NAT
* ANE
* LUX

CTA.G19A.____ - with grey gasket
CTA.G19N.____ - with black gasket

Fe CHL



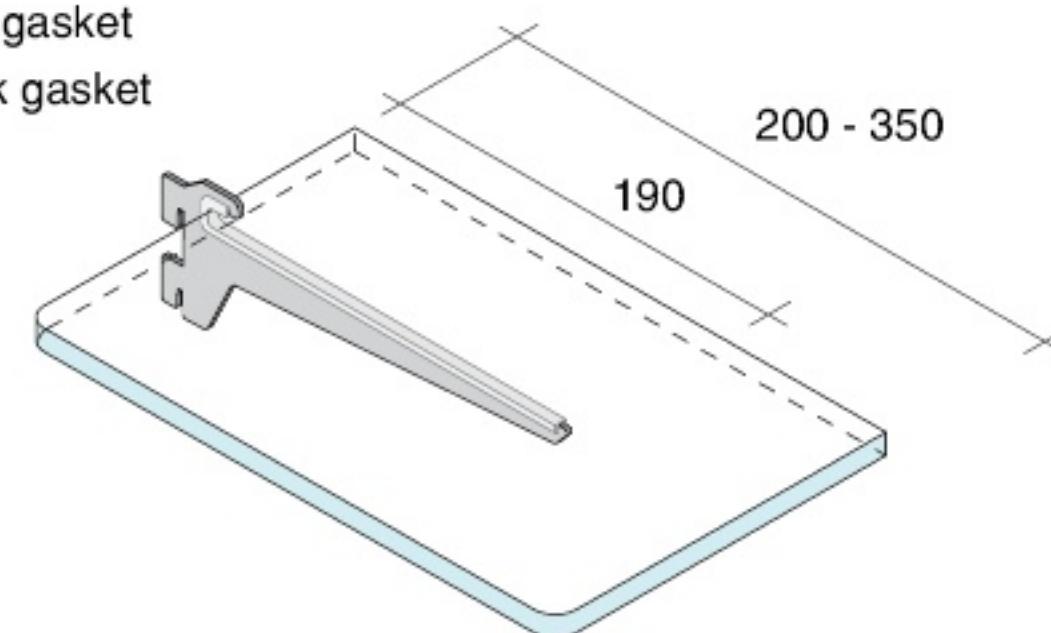


CTA.G29A.____ - with grey gasket
CTA.G29N.____ - with black gasket

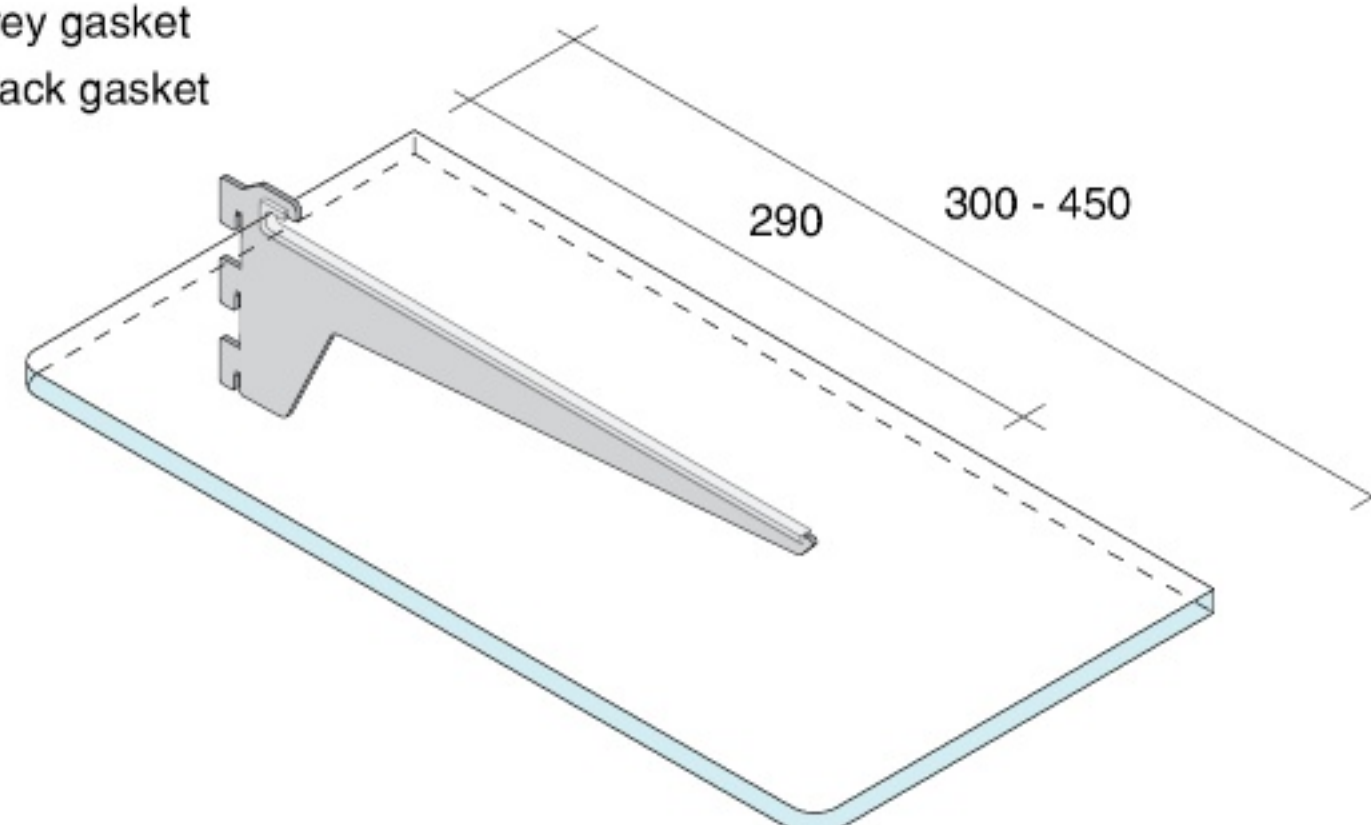

DWA series

Al NAT
* LUX
* ORO

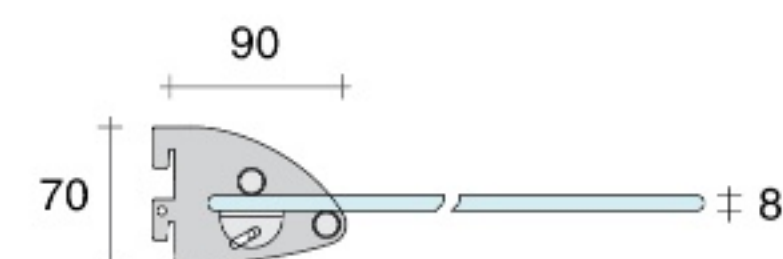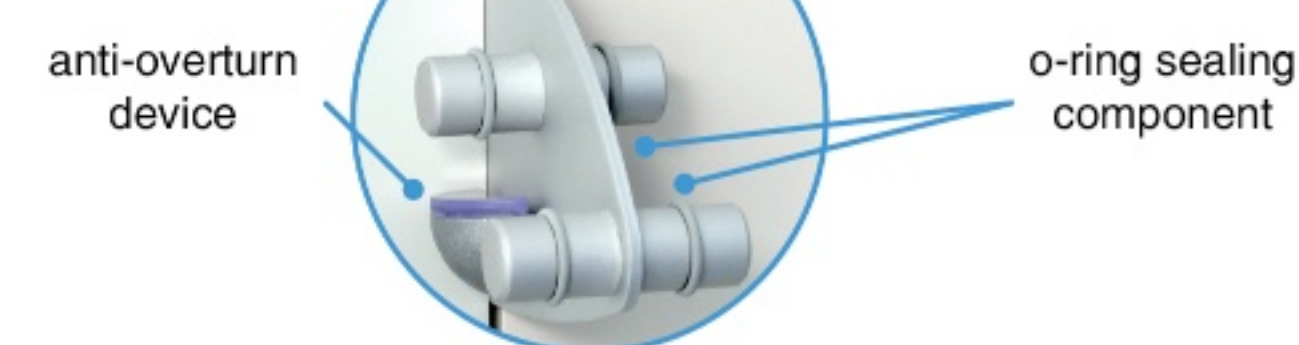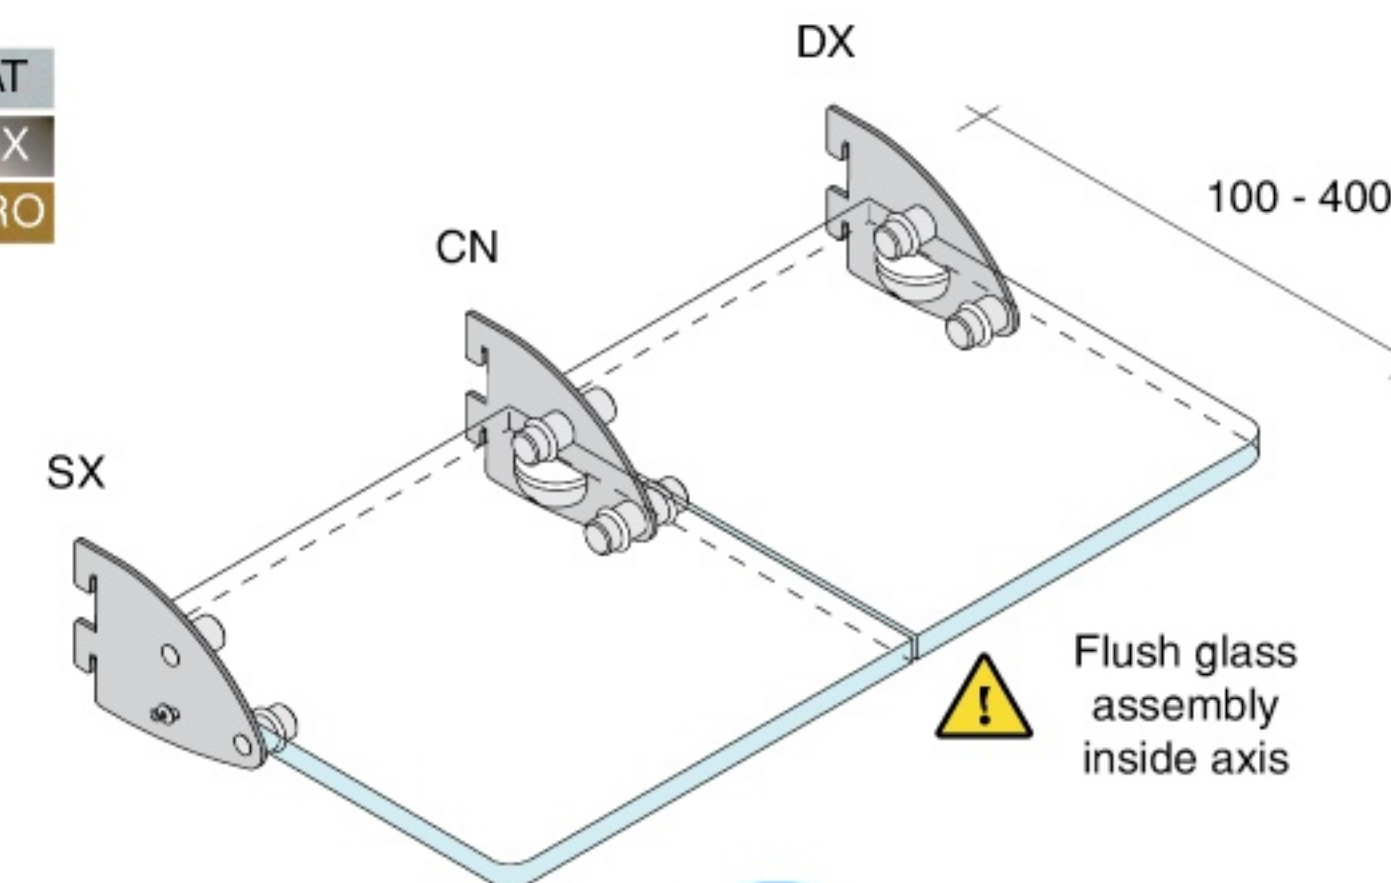

DWA.DX08.____ - right element for 8 mm glass thickness
DWA.SX08.____ - left element for 8 mm glass thickness
DWA.CN08.____ - central element for 8 mm glass thickness



DWA.DX10.____ - right element for 10 mm glass thickness
DWA.SX10.____ - left element for 10 mm glass thickness
DWA.CN10.____ - central element for 10 mm glass thickness

LOADING CAPACITIES on PAGE 67



LOADING capacities

NHS



page 38

BL



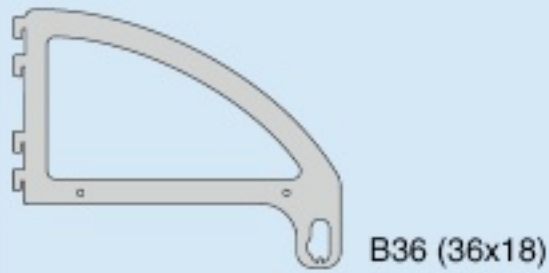
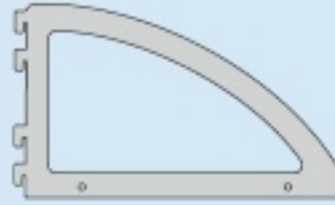
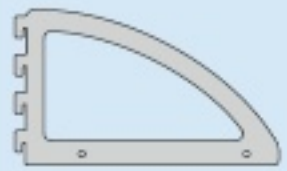
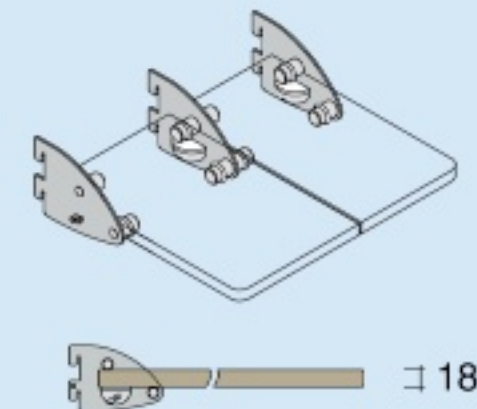
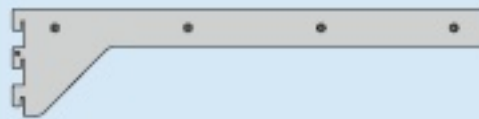

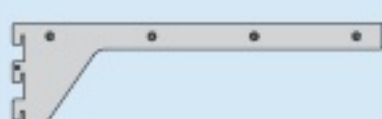
page 37

DWA

page 38

CTL

page 36

Specific for wood shelves	Model	Length [mm]	Height [mm]	Load Aluminium	Load Steel
 Ø12	NHS.0010	165	55		90 kg
 15	NHS.0015	170	55		90 kg
 B36 (36x18)	BLP.F300	305	250	70 kg	
	BLA.F300	305	190	70 kg	
	BLM.F250	245	150	70 kg	
 18	DWA.DX DWA.SX DWA.CN	90	70	50 kg	
	CTL.DX45 CTL.SX45	450	105	30 kg	40 kg
	CTL.DX40 CTL.SX40	400	100	30 kg	40 kg
	CTL.DX35 CTL.SX35	350	100	25 kg	35 kg

CMO.G

CTA.G

page 51

Z

openwork

page 53




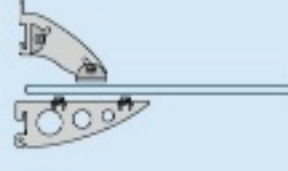
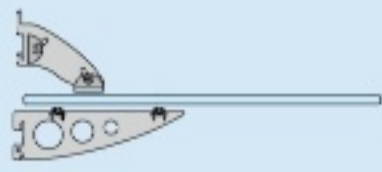
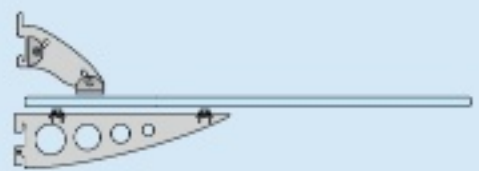
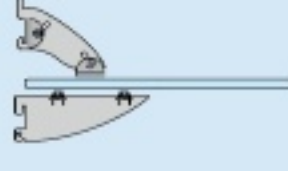
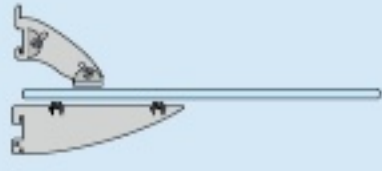
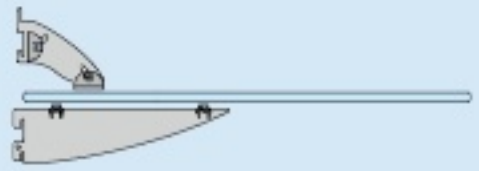
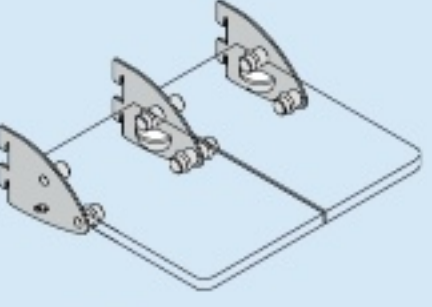
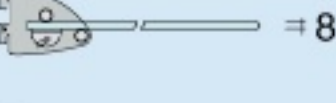
Z

solid

page 53

DWA

page 51

Specific for glass shelves	Model	Length [mm]	Height [mm]	Load Aluminium	Load Steel
	CMO.G19	205	65	30 kg	40 kg
	CTA.G19	204	67	30 kg	40 kg
	CTA.G29	304	102	40 kg	50 kg
	Z14	140	130	35 kg	45 kg
	Z18	180	135	35 kg	45 kg
	Z23	230	140	35 kg	45 kg
	Z14	140	130	35 kg	45 kg
	Z18	180	135	35 kg	45 kg
	Z23	230	140	35 kg	45 kg
 8  10	DWA.DX08 DWA.SX08 DWA.CN08 DWA.DX10 DWA.SX10 DWA.CN10	90	70	50 kg	



LOADING capacities

SKA
Shoe rack
page 56

Specific accessories	Model	Length [mm]	Height [mm]	Load Aluminium	Load Steel
 T12 (Ø12)	SKA.DX03 SKA.SX03 SKA.CN03	236	83	5 kg	


PAK
page 58

Specific accessories	Model	Length [mm]	Height [mm]	Load Aluminium	Load Steel
 55	PAK.DX PAK.SX	10 / 50	55		100 kg


PAT
page 58

Specific accessories	Model	Length [mm]	Height [mm]	Load Aluminium	Load Steel
 55	PAT.DX PAT.SX	10 / 50	55		100 kg



MFX
page 59

Specific accessories	Model	Length [mm]	Height [mm]	Load Aluminium	Load Steel
	MFX.DX96 MFX.SX96	11	140		100 kg

GNC
page 63

Specific accessories	Model	Length [mm]	Height [mm]	Load Aluminium	Load Steel
	GNC.D302	45	56	10 kg each	20 kg each

TAC
page 63


Specific accessories	Model	Length [mm]	Height [mm]	Load Aluminium	Load Steel
	TAC.L700	20	37	10 kg	20 kg each
	TAC.T700	24	15	10 kg	

Loading capacity evaluation for single element, on 4 resting points.

LOADING CAPACITY EVALUATION METHOD

The capacities indicated here refer to a couple of supports with saddles that undergo the following loading test:

- Assembly of 2 slotted profiles, perfectly parallel, suitably fixed at 60 cm distance from each other and fixed to the wall according to the instruction;
- fixing of 2 Fit Art supports to the slotted profiles at the equal height;
- assembly of 4 saddles, two for each support;
- positioning of a 70 cm length shelf on supports, equipped with saddles, with 5 cm overhang on each side (for saddles see pag. 35);
- positioning of the load centered on the shelf (the load is evenly distributed to simulate real application).

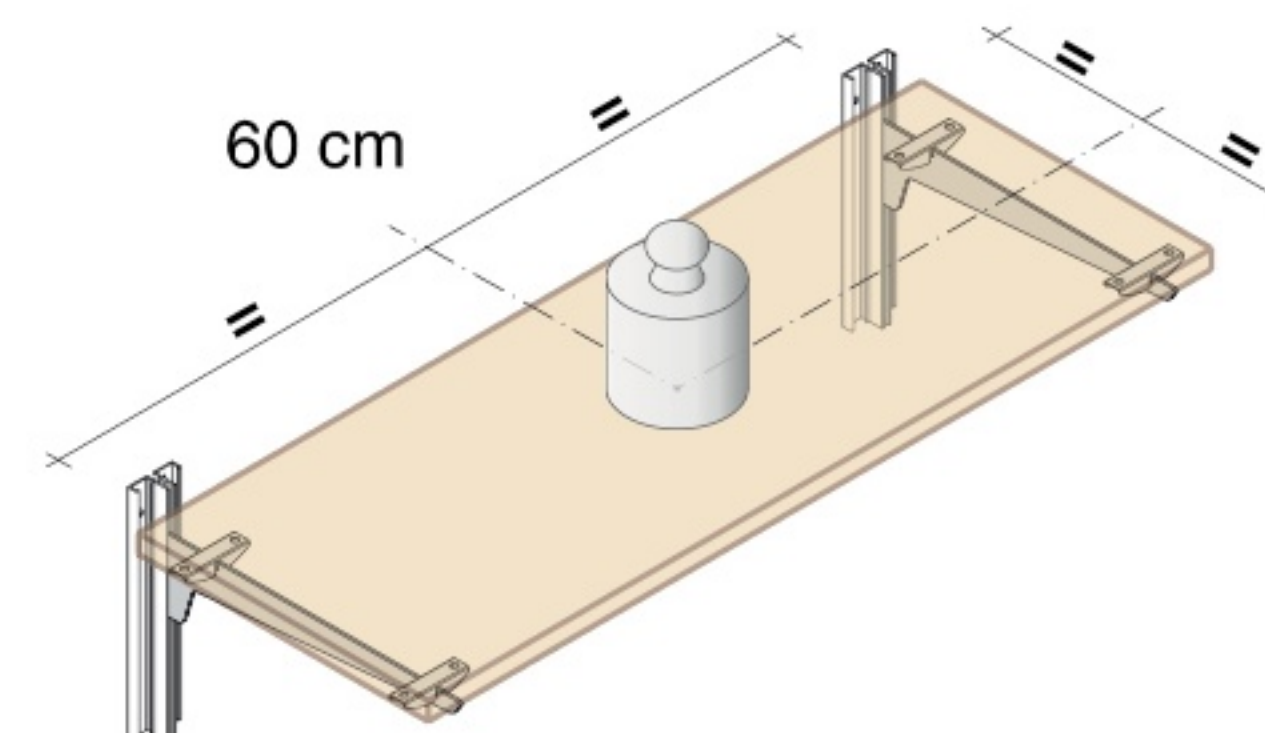

All other Fit Art supports without saddles need to be assembled according to the instruction procedure.

The capacities indicated in the load chart are the **half** of the breaking load.



For the couple of supports that exceed the limit of 200 kg, imposed during loading test, the value 100 kg is indicated.

The loading capacities of all Fit Art products result from the synergy between the manufacturing processes and the items shapes. The slavish reproduction of our products does not determine the same standards of hardness.